

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A

MA2058

FEDERAL SUPPLY CLASS
4730

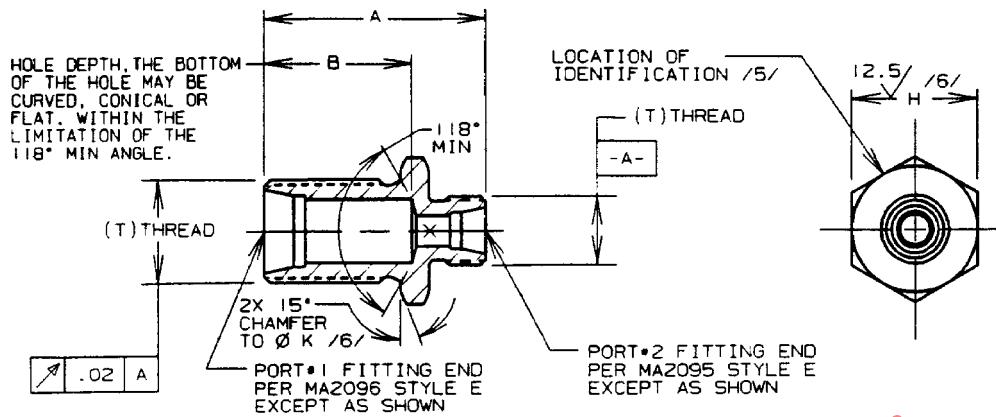


FIGURE 1 - UNION, REDUCER, BULKHEAD, FLARELESS END SHOWN AS REDUCER


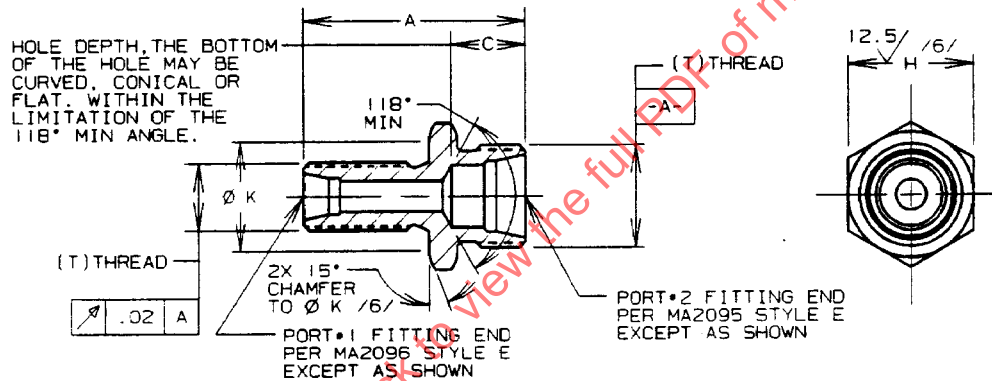


FIGURE 2 - UNION, EXPANDER, BULKHEAD, BULKHEAD END SHOWN AS REDUCER

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MA2005 (ISO 7169)

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space®
INTERNATIONAL
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

UNION, REDUCER/EXPANDER BULKHEAD,
FLARELESS TUBE, METRIC

MA2058
SHEET 1 OF 5

REV.
A

REV.
A

MA2058

TABLE 1 - PORT SIZES, CORRESPONDING THREADS AND HEX SIZES

BASIC NO. MA2058 /12/ SIZE CODE	(NOMINAL TUBE SIZE DN) /3/	T PER MA1370	H	K ±0.2
06	06	MJ12X1.25	13.73-14.00	13.71
08	08	MJ14X1.50	16.73-17.00	16.71
10	10	MJ16X1.50	16.73-17.00	16.71
12	12	MJ18X1.50	18.67-19.00	18.65
14	14	MJ20X1.50	21.67-22.00	21.65
16	16	MJ22X1.50	23.67-24.00	23.65
20	20	MJ27X1.50	29.67-30.00	29.65
25	25	MJ33X1.50	35.38-36.00	35.36
32	32	MJ42X2.00	45.38-46.00	45.36
40	40	MJ50X2.00	54.26-55.00	54.24

TABLE 2 - DIMENSIONS, OVERALL LENGTH

PORT #2 SIZE	A PORT #1 SIZE 05	A PORT #1 SIZE 06	A PORT #1 SIZE 08	A PORT #1 SIZE 10	A PORT #1 SIZE 12	A PORT #1 SIZE 14	A PORT #1 SIZE 16	A PORT #1 SIZE 20	A PORT #1 SIZE 25	A PORT #1 SIZE 32	A PORT #1 SIZE 40
05	-	35.0	37.0	39.0	39.0	40.0	40.0	40.0	41.0	44.0	46.0
06	36.0	-	38.0	40.0	40.0	41.0	41.0	41.0	42.0	45.0	47.0
08	37.0	37.0	-	41.0	41.0	42.0	42.0	42.0	43.0	46.0	48.0
10	39.0	39.0	41.0	-	42.0	43.0	43.0	43.0	44.0	47.0	49.0
12	39.0	39.0	41.0	42.0	-	43.0	43.0	43.0	44.0	47.0	49.0
14	40.0	40.0	42.0	43.0	43.0	-	43.0	43.0	44.0	47.0	49.0
16	40.0	40.0	42.0	43.0	43.0	43.0	-	43.0	44.0	47.0	49.0
20	40.0	40.0	42.0	43.0	43.0	43.0	43.0	-	44.0	47.0	49.0
25	41.0	41.0	43.0	44.0	44.0	44.0	44.0	44.0	-	48.0	50.0
32	42.0	42.0	44.0	45.0	45.0	45.0	45.0	45.0	46.0	-	51.0
40	44.0	44.0	46.0	47.0	47.0	47.0	47.0	47.0	48.0	51.0	-

REV.
A

MA2058

TABLE 3 - DIMENSIONS, HOLE DEPTH

	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5	B +0/-0.5
PORT #2 SIZE	PORT #1 SIZE 05	PORT #1 SIZE 06	PORT #1 SIZE 08	PORT #1 SIZE 10	PORT #1 SIZE 12	PORT #1 SIZE 14	PORT #1 SIZE 16	PORT #1 SIZE 20	PORT #1 SIZE 25	PORT #1 SIZE 32	PORT #1 SIZE 40
05	-	24.0	25.5	26.5	26.0	26.6	26.0	25.0	25.0	26.0	25.5
06	12.0	-	26.0	26.5	26.0	26.5	26.0	25.5	25.0	26.0	26.0
08	12.5	13.0	-	27.0	26.5	27.0	26.5	26.0	25.5	26.5	26.5
10	13.5	13.5	14.0	-	27.0	27.5	27.0	26.5	26.0	27.0	27.0
12	13.0	13.0	13.5	14.0	-	28.0	27.5	27.0	26.5	27.5	27.5
14	13.5	13.5	14.0	14.5	15.0	-	28.0	27.5	27.0	28.5	28.0
16	13.0	13.0	13.5	14.0	14.5	15.0	-	28.0	27.5	29.0	28.0
20	12.0	12.5	13.0	13.5	14.0	14.5	15.0	-	28.0	30.0	29.5
25	12.0	12.0	12.5	13.0	13.5	14.0	14.5	16.0	-	31.0	31.0
32	11.0	11.0	11.5	12.0	12.5	13.5	14.0	15.0	17.0	-	34.0
40	10.5	11.0	11.5	12.0	12.5	13.0	13.0	14.5	16.0	18.0	-

TABLE 4 - PORT SIZE, HOLE DEPTH

	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5	C +0/-0.5
PORT #1 SIZE	PORT #2 SIZE 05	PORT #2 SIZE 06	PORT #2 SIZE 08	PORT #2 SIZE 10	PORT #2 SIZE 12	PORT #2 SIZE 14	PORT #2 SIZE 16	PORT #2 SIZE 20	PORT #2 SIZE 25	PORT #2 SIZE 32	PORT #2 SIZE 40
05	-	12.0	12.5	13.5	13.0	13.5	13.0	12.0	12.0	11.0	10.5
06	-	-	13.0	13.5	13.0	13.5	13.0	12.5	12.0	11.0	11.0
08	-	-	-	14.0	13.5	14.0	13.5	13.0	12.5	11.5	11.5
10	-	-	-	-	14.0	14.5	14.0	13.5	13.0	12.0	12.0
12	-	-	-	-	-	15.0	14.5	14.0	13.5	12.5	12.5
14	-	-	-	-	-	-	15.0	14.5	14.0	13.5	13.0
16	-	-	-	-	-	-	-	15.0	14.5	14.0	13.0
20	-	-	-	-	-	-	-	-	16.0	15.0	14.5
25	-	-	-	-	-	-	-	-	-	17.0	16.0
32	-	-	-	-	-	-	-	-	-	-	18.0

REV.
A

MA2058

NOTES:

/1/ MATERIAL:

- a. NO CODE LETTER (USE HYPHEN): TYPE 1137 STEEL BAR PER ASTM A 108 OR TYPE 4130 STEEL BAR PER MIL-S-6758
- b. CODE LETTER D: TYPE 2024-T6 ALUMINUM ALLOY BAR PER AMS 4112 OR TYPE 2024-T851 ALUMINUM ALLOY BAR PER QQ-A-225/6
- c. CODE LETTER J: TYPE 304 CORROSION RESISTANT STEEL BAR PER QQ-S-763, CLASS 304
- d. CODE LETTER K: TYPE 316 CORROSION RESISTANT STEEL BAR PER QQ-S-763, CLASS 316
- e. CODE LETTER R: TYPE 321 CORROSION RESISTANT STEEL BAR PER QQ-S-763, CLASS 321
- f. CODE LETTER S (INACTIVE FOR USE): TYPE 347 CORROSION RESISTANT STEEL BAR PER QQ-S-763, CLASS 347
- g. CODE LETTER T: TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS 4928
- h. CODE LETTER W: TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS 4124
- i. CODE S MATERIAL MAY BE USED UNTIL STOCK IS DEPLETED, CODE R MATERIAL MAY BE SUBSTITUTED WHENEVER CODE S MATERIAL IS SPECIFIED.

2. FINISH:

- a. NO MATERIAL CODE LETTER (HYPHEN): CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2. DIP IN OIL PER MIL-H-6083 OR MIL-H-46170.
- b. MATERIAL CODE LETTER T: FLUORIDE PHOSPHATE CONVERSION COAT PER AMS 2486.
- c. MATERIAL CODE LETTER D AND W: ANODIZE PER AMS 2471.
- d. MATERIAL CODE LETTER J, K, R, AND S: PASSIVATE PER QQ-P-35, TYPE VI OR VII.

/3/ DN = NOMINAL TUBE OUTSIDE DIAMETER

/4/ PROCUREMENT SPECIFICATION: MA2005 (ISO 7169) THIS PART SHALL BE QUALIFIED TO THE PROCUREMENT SPECIFICATION AS APPLICABLE IN A COMPLETE ASSEMBLY. USERS OF THIS STANDARD ARE ADVISED TO CONTROL SOURCE APPROVAL(S) BY STANDARD PAGE SUPPLEMENT SHEET OR SIMILAR MEANS.

/5/ IDENTIFICATION AT LOCATION SHOWN:

- a. MARK PER AS478 CLASS C OR D OR METHOD 7A3, 15A3, OR 15B.
- b. MANUFACTURER'S NAME, TRADEMARK OR CAGE CODE, BASIC PART NUMBER, AND MATERIAL CODE LETTER.

/6/ THE LARGEST PORT DETERMINES THE HEX SIZE.

7. THIS PART IS DESIGNED FOR USE IN SYSTEMS AT TYPE II TEMPERATURE (-55 TO 135 °C) WITH OPERATING PRESSURES AS FOLLOWS:

- a. ALL SIZES TITANIUM ALLOY AND CORROSION RESISTANT STEEL AND SIZES -05 THROUGH -20 ALUMINUM ALLOY AT CLASS E (21 000 kPa)
- b. SIZES -25 AND -32 ALUMINUM ALLOY AT CLASS B (10 500 kPa)
- c. SIZE -40 ALUMINUM ALLOY AT CLASS A (4000 kPa)
- d. TYPE AND CLASSES PER MA2001 (ISO 6771)

8. SURFACE TEXTURE: SYMBOLS PER ANSI Y14.36; REQUIREMENTS PER ANSI/ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 3.2 μm Ra.

9. BREAK EDGES 0.1 TO 0.4 UNLESS OTHERWISE SPECIFIED.