

FEDERAL SUPPLY CLASS

4730

MA2096 REV. A

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

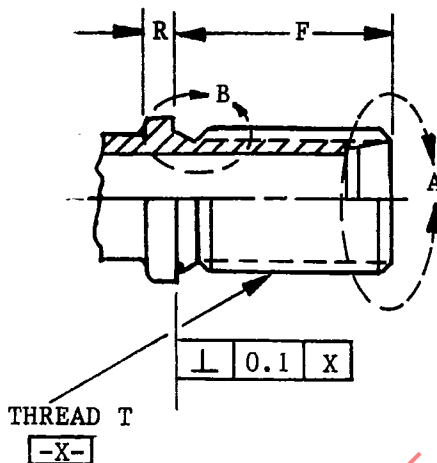


FIGURE 1 - FRONT AND SIDE VIEWS FOR STYLE S

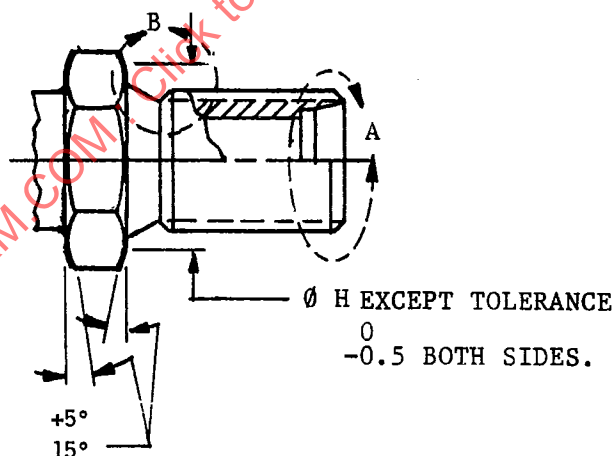


FIGURE 2 - FRONT AND SIDE VIEWS FOR STYLE E

CUSTODIAN: G-3/G-3B

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

FITTING END, 24° CONE,
BULKHEAD, METRIC, STANDARD
DIMENSIONS FOR, DESIGN STANDARD

MA2096

SHEET 1 OF 4

REV.**A**

ISSUED 1985-08 REVISED 1991-10-30

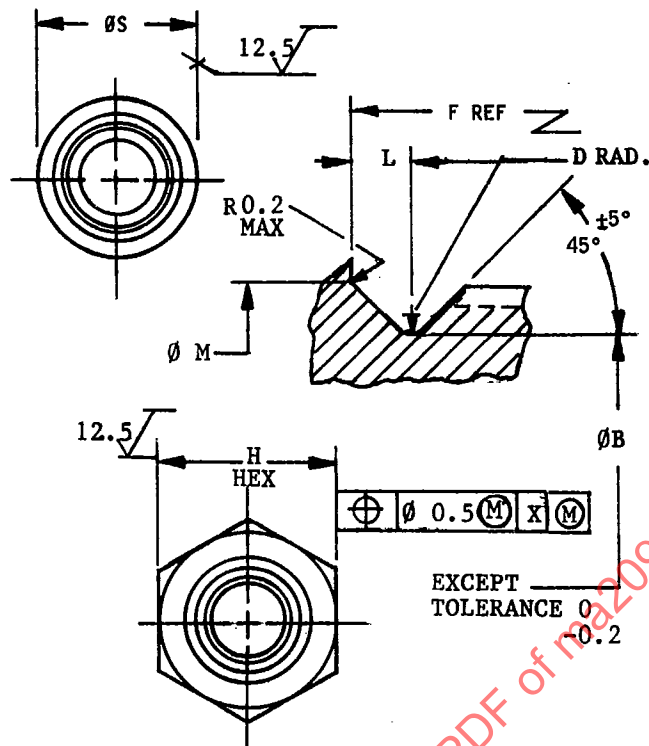
MA2096 REV.
A

FIGURE 3 - ENLARGED VIEW B

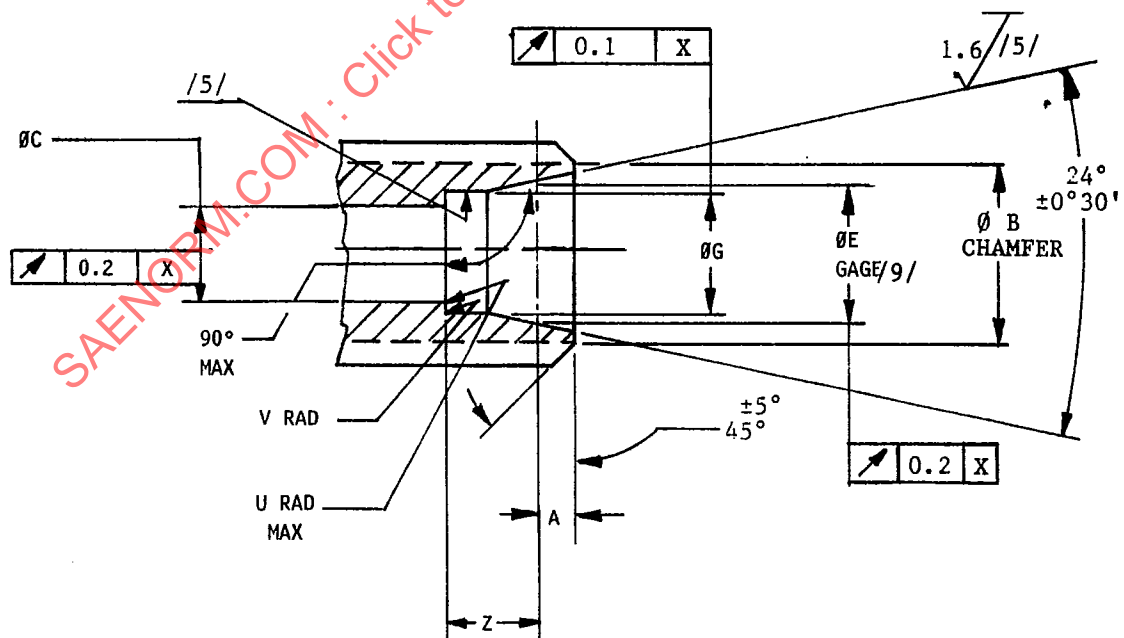


FIGURE 4 - ENLARGED VIEW A

MA2096
REV.
A

TABLE 1 - DIMENSIONS

TUBE SIZE	THREAD T	A	B	C	D	E /3/	F	G	H	L +0.4/0	M 0/-0.3	R +1.0	TUBE SIZE	S 0/-0.3	U MAX	V	Z +0.12
DN /1/	MA1370 4g6g	+0.12	0/-0.5	+0.1	+0.2/0	BASIC	+0.2	+0.10/0					DN /8/				
05	MJ10X1	1.50	8.6	4.3	0.8	6.5	22.0	5.26	13-73-14.00	2.0	10.2	5.5	05	14.0	0.13	0.13-0.25	4.3
06	MJ12X1.25	1.50	10.2	5.3	1.0	7.5	22.0	6.26	16.73-17.00	2.5	12.2	5.5	06	17.0	0.13	0.25-0.40	4.8
08	MJ14X1.5	1.50	11.9	7.1	1.2	9.5	24.0	8.26	18.67-19.00	3.0	14.2	6.0	08	19.0	0.25	0.25-0.40	4.8
10	MJ16X1.5	1.50	13.9	9.1	1.2	11.5	25.0	10.26	21.67-22.00	3.0	16.2	6.0	10	22.0	0.25	0.25-0.40	4.8
12	MJ18X1.5	2.40	15.9	10.9	1.2	13.5	25.0	12.26	23.67-24.00	3.0	18.2	6.0	12	24.0	0.25	0.25-0.40	4.9
14	MJ20X1.5	2.40	17.9	12.5	1.2	15.5	25.0	14.26	26.67-27.00	3.0	20.2	6.0	14	27.0	0.25	0.25-0.40	4.9
16	MJ22X1.5	2.40	19.9	14.5	1.2	17.5	25.0	16.26	29.67-30.00	3.0	22.2	6.0	16	30.0	0.25	0.25-0.40	4.9
20	MJ27X1.5	2.40	24.9	18.1	1.2	21.5	25.0	20.28	35.38-36.00	3.0	27.2	6.0	20	36.0	0.25	0.25-0.40	4.9
25	MJ33X1.5	2.40	30.9	22.5	1.2	26.6	26.0	25.28	40-38-41.00	3.0	33.2	6.0	25	41.0	0.40	0.50-0.70	4.9
32	MJ42X2	2.40	39.3	29.3	1.6	33.7	29.0	32.30	49.38-50.00	4.0	42.2	7.0	32	50.0	0.40	0.50-0.70	5.4
40	MJ50X2	2.40	47.3	37.3	1.6	41.7	29.0	40.30	59.26-60.00	4.0	50.2	7.0	40	60.0	0.40	0.50-0.70	5.4