


SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A			FEDERAL SUPPLY CLASS 5310
MA3351™	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
		For more information on this standard, visit https://www.sae.org/standards/content/MA3351A/	THIRD ANGLE PROJECTION 
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: MA1937	
	METRIC AEROSPACE STANDARD NUT, SPLINE DRIVE - EXTENDED WASHER, CUPWASHER LOCK, UNS S66826, SILVER PLATE, MJ THREAD, METRIC		MA3351™ REV. A

SAENORM.COM : Click to view the full PDF of ma3351a

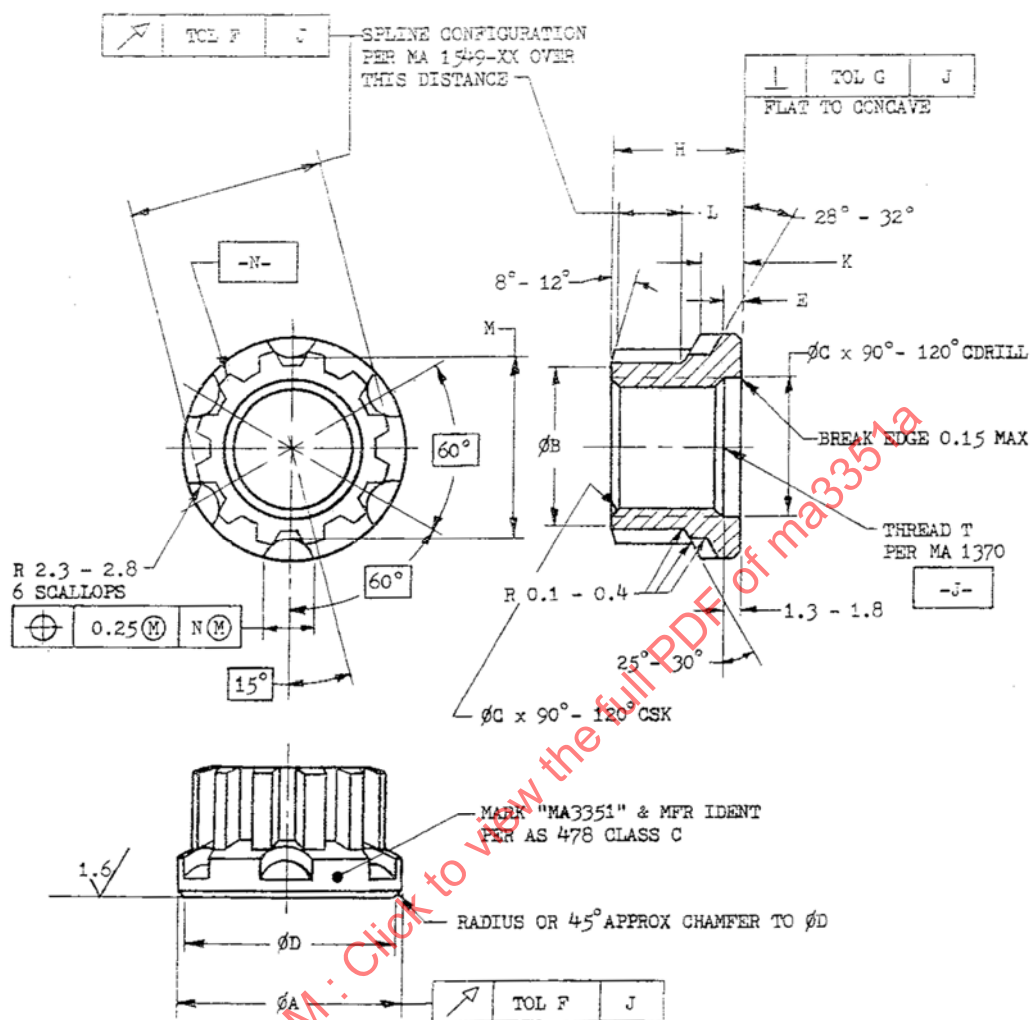


TABLE I. DIMENSIONS

PART NO.	THREAD T	XX SPLINE DASH NO.	A	B	C	D
MA3351-05	MJ5 x 0.8-4H6H	07	11.50 - 11.65	7.0 - 7.5	5.2 - 5.8	10.4 - 10.7
MA3351-06	MJ6 x 1-4H5H	08	12.70 - 12.85	8.0 - 8.5	6.3 - 7.1	11.6 - 11.9
MA3351-07	MJ7 x 1-4H5H	09	13.80 - 13.95	9.0 - 9.5	7.3 - 8.1	12.7 - 13.0
MA3351-08	MJ8 x 1-4H5H	10	14.90 - 15.05	10.0 - 10.5	8.3 - 9.1	13.8 - 14.1
MA3351-10	MJ10 x 1.25-4H5H	12	17.20 - 17.35	12.0 - 12.5	10.3 - 11.1	16.1 - 16.4
MA3351-12	MJ12 x 1.25-4H5H	15	20.50 - 20.65	15.0 - 15.5	12.3 - 13.1	19.4 - 19.7