

REV.
B

SAE MA3367

FEDERAL SUPPLY CLASS
5306

RATIONALE

ADD CADMIUM NOTICE IN NOTE SECTION; ADDED INACTIVATION STATUS /16/ IN SUPPORT OF NONCURRENT STATEMENT; CORRECTED TYPO "L" LENGTH FOR MJ12X1.25-4h6h 139.7 – 140.3 WAS 139.7 – 40.3, AND GENERAL UPDATING FOR OBSOLETE SPEC CALLOUTS.


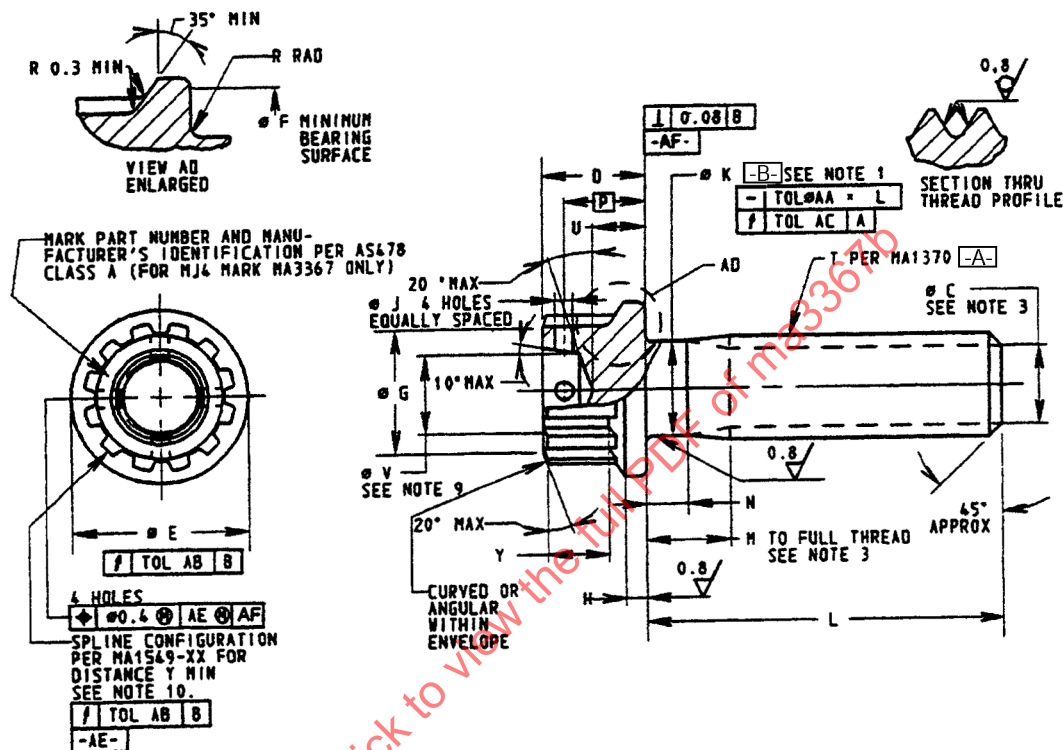


FIGURE 1 - BOLT

INACTIVE /16/

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/MA3367B>

THIRD ANGLE PROJECTION



CUSTODIAN: SAE E-25

PROCUREMENT SPECIFICATION: MA3376

SAE Aerospace
An SAE International Group

METRIC AEROSPACE STANDARD

BOLT, MACHINE-SPLINE DRIVE HEAD,
DRILLED, PD SHANK-LONG THREAD
AMS6322, CADMIUM PLATED, METRIC

SAE MA3367
SHEET 1 OF 7

REV.
B

TABLE 1 – PART NO AND DIMENSIONS

PART NUMBER SEE NOTE 8	NOM DIA REF	THREAD T	C	D h15	E MAX	F MIN	G MIN	H MIN	J H13
MA3367-040XXX	4	MJ4x0.7-4h6h	2.6 - 3.1	5.02 - 5.50	8.3	7.5	6	0.8	1.00 - 1.14
MA3367-050XXX	5	MJ5x0.8-4h6h	3.0 - 4.0	5.92 - 6.50	9.1	8.3	7	1.0	1.00 - 1.14
MA3367-060XXX	6	MJ6x1-4h6h	3.7 - 4.7	6.92 - 7.50	10.6	9.8	8	1.2	1.40 - 1.54
MA3367-070XXX	7	MJ7x1-4h6h	4.7 - 5.7	7.62 - 8.20	12.1	11.3	9	1.4	1.40 - 1.54
MA3367-080XXX	8	MJ8x1-4h6h	5.7 - 6.7	8.02 - 8.60	13.6	12.8	10	1.6	1.40 - 1.54
MA3367-100XXX	10	MJ10x1.25-4h6h	7.4 - 8.4	9.40 - 10.10	16.7	15.7	12	2.0	1.60 - 1.74
MA3367-120XXX	12	MJ12x1.25-4h6h	9.4 - 10.4	10.70 - 11.40	19.9	18.8	14	2.4	1.60 - 1.74

TABLE 1 – PART NO AND DIMENSIONS (CONTINUED)

NOM DIA REF	K	P	R	U	V	Y MIN	AA	AB	AC	WRENCHING CONFIGURATION DASH NO. SEE NOTE 10
4	3.41 - 3.67	3.5	0.2 - 0.4	—	—	2.5	0.0030	0.10	0.12	06
5	4.35 - 4.61	4.5	0.3 - 0.5	2.5 - 2.9	3.2 - 3.7	2.8	0.0030	0.13	0.12	07
6	5.22 - 5.48	5.2	0.5 - 0.7	2.8 - 3.2	4.1 - 4.6	3.5	0.0030	0.15	0.12	08
7	6.22 - 6.48	5.9	0.5 - 0.7	3.3 - 3.7	4.9 - 5.4	3.8	0.0030	0.18	0.15	09
8	7.22 - 7.48	6.3	0.5 - 0.7	3.7 - 4.1	5.2 - 5.7	3.9	0.0030	0.20	0.15	10
10	9.06 - 9.32	7.7	0.6 - 0.8	4.7 - 5.1	6.7 - 7.2	4.2	0.0025	0.25	0.15	12
12	11.06 - 11.32	8.8	0.6 - 0.9	5.6 - 6.0	8.0 - 8.5	4.5	0.0025	0.30	0.18	14

SAENORM.COM : Click to view the full PDF of ma3367

 An SAE International Group	METRIC AEROSPACE STANDARD	 MA3367 SHEET 2 OF 7	REV. B
	BOLT, MACHINE-SPLINE DRIVE HEAD, DRILLED, PD SHANK-LONG THREAD AMS6322, CADMIUM PLATED, METRIC		

TABLE 2 – DASH NO, DIMENSIONS L, M AND N

L LENGTH	MJ4x0.7-4h6h				MJ5x0.8-4h6h			
	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX. MASS kg/100	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX. MASS kg/100
5.7 - 6.3	040006	1.8	0.4	0.228	—	—	—	—
7.7 - 8.3	040008	1.8	0.4	0.244	050008	2.1	0.5	0.345
9.7 - 10.3	040010	1.8	0.4	0.260	050010	2.1	0.5	0.371
11.7 - 12.3	040012	1.8	0.4	0.276	050012	2.1	0.5	0.396
13.7 - 14.3	040014	1.8	0.4	0.292	050014	2.1	0.5	0.422
15.7 - 16.3	040016	2.0	0.4	0.308	050016	2.1	0.5	0.447
17.7 - 18.3	040018	4.0	1.1	0.324	050018	2.1	0.5	0.473
19.7 - 20.3	040020	6.0	3.1	0.340	050020	4.0	0.9	0.498
21.7 - 22.3	040022	8.0	5.1	0.356	050022	6.0	2.9	0.524
23.7 - 24.3	040024	10.0	7.1	0.372	050024	8.0	4.9	0.549
25.7 - 26.3	040026	12.0	9.1	0.388	050026	10.0	6.9	0.575
27.7 - 28.3	040028	14.0	11.1	0.403	050028	12.0	8.9	0.600
29.7 - 30.3	040030	16.0	13.1	0.419	050030	14.0	10.9	0.626
31.7 - 32.3	040032	18.0	15.1	0.435	050032	16.0	12.9	0.615
33.7 - 34.3	040034	20.0	17.1	0.451	050034	18.0	14.9	0.677
35.7 - 36.3	040036	22.0	19.1	0.467	050036	20.0	16.9	0.702
37.7 - 38.3	040038	24.0	21.1	0.483	050038	22.0	18.9	0.728
39.7 - 40.3	040040	26.0	23.1	0.499	050040	24.0	20.9	0.753
41.7 - 42.3	040042	28.0	25.1	0.515	050042	26.0	22.9	0.779
43.7 - 44.3	040044	30.0	27.1	0.531	050044	28.0	24.9	0.804
45.7 - 46.3	040046	32.0	29.1	0.547	050046	30.0	26.9	0.830
47.7 - 48.3	040048	34.0	31.1	0.563	050048	32.0	28.9	0.855
49.7 - 50.3	040050	36.0	33.1	0.579	050050	34.0	30.9	0.881
51.7 - 52.3	040052	38.0	35.1	0.595	050052	46.0	32.9	0.906
53.7 - 54.3	040054	40.0	37.1	0.611	050054	38.0	34.9	0.932
55.7 - 56.3	040056	42.0	39.1	0.627	050056	40.0	36.9	0.958
57.7 - 58.3	—	—	—	—	050058	42.0	38.9	0.983
59.7 - 60.3	—	—	—	—	050060	44.0	40.9	1.009
63.7 - 64.3	—	—	—	—	050064	48.0	44.9	1.060
67.7 - 68.3	—	—	—	—	050068	52.0	48.9	1.111

TABLE 2 – DASH NO, DIMENSIONS L, M AND N (CONTINUED)

L LENGTH	MJ6x1-4h6h				MJ7x1-4h6h			
	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX. MASS kg/100	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX. MASS kg/100
9.7 - 10.3	060010	2.7	0.7	0.540	070010	2.7	0.7	0.754
11.7 - 12.3	060012	2.7	0.7	0.576	070012	2.7	0.7	0.806
13.7 - 14.3	060014	2.7	0.7	0.613	070014	2.7	0.7	0.857
15.7 - 16.3	060016	2.7	0.7	0.649	070016	2.7	0.7	0.909
17.7 - 18.3	060018	2.7	0.7	0.686	070018	2.7	0.7	0.960
19.7 - 20.3	060020	2.7	0.7	0.722	070020	2.7	0.7	1.012
21.7 - 22.3	060022	4.0	0.7	0.759	070022	2.7	0.7	1.063
23.7 - 24.3	060024	6.0	2.5	0.795	070024	4.0	0.7	1.115
25.7 - 26.3	060026	8.0	4.5	0.832	070026	6.0	2.5	1.166
27.7 - 28.3	060028	10.0	6.5	0.868	070028	8.0	4.5	1.217
29.7 - 30.3	060030	12.0	8.5	0.905	070030	10.0	6.5	1.269
31.7 - 32.3	060032	14.0	10.5	0.941	070032	12.0	8.5	1.320
33.7 - 34.3	060034	16.0	12.5	0.977	070034	14.0	10.5	1.372
35.7 - 36.3	060036	18.0	14.5	1.014	070036	16.0	12.5	1.423
37.7 - 38.3	060038	20.0	16.5	1.050	070038	18.0	14.5	1.475
39.7 - 40.3	060040	22.0	18.5	1.087	070040	20.0	16.5	1.526
41.7 - 42.3	060042	24.0	20.5	1.123	070042	22.0	18.5	1.578
43.7 - 44.3	060044	26.0	22.5	1.160	070044	24.0	20.5	1.629
45.7 - 46.3	060046	28.0	24.5	1.196	070046	26.0	22.5	1.680
47.7 - 48.3	060048	30.0	26.5	1.232	070048	28.0	24.5	1.732
49.7 - 50.3	060050	32.0	28.5	1.269	070050	30.0	26.5	1.783
51.7 - 52.3	060052	34.0	30.5	1.305	070052	32.0	28.5	1.835
53.7 - 54.3	060054	36.0	32.5	1.342	070054	34.0	30.5	1.886
55.7 - 56.3	060056	38.0	34.5	1.378	070056	36.0	32.5	1.938
57.7 - 58.3	060058	40.0	36.5	1.415	070058	38.0	34.5	1.989
59.7 - 60.3	060060	42.0	38.5	1.451	070060	40.0	36.5	2.040
63.7 - 64.3	060064	46.0	42.5	1.524	070064	44.0	40.5	2.143
67.7 - 68.3	060068	50.0	46.5	1.597	070068	48.0	44.5	2.246
71.7 - 72.3	060072	54.0	50.5	1.670	070072	52.0	48.5	2.349
75.7 - 76.3	060076	58.0	54.5	1.743	070076	56.0	52.5	2.452
79.7 - 80.3	060080	62.0	58.5	1.816	070080	60.0	56.5	2.555
83.7 - 84.3	060084	66.9	62.5	1.889	070084	64.0	60.5	2.658
87.7 - 88.3	—	—	—	—	070088	68.0	64.5	2.761
91.7 - 92.3	—	—	—	—	070092	72.0	68.5	2.864
95.7 - 96.3	—	—	—	—	070096	76.0	72.5	2.967

TABLE 2– DASH NO, DIMENSIONS L, M AND N (CONTINUED)

L LENGTH	MJ8x1-4h6h				MJ10x1.25-4h6h			
	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX. MASS kg/100	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX. MASS kg/100
9.7 - 10.3	080010	2.7	0.7	1.022	—	—	—	—
11.7 - 12.3	080012	2.7	0.7	1.091	—	—	—	—
13.7 - 14.3	080014	2.7	0.7	1.160	100014	3.3	0.8	1.947
15.7 - 16.3	080016	2.7	0.7	1.229	100016	3.3	0.8	2.055
17.7 - 18.3	080018	2.7	0.7	1.298	100018	3.3	0.8	2.162
19.7 - 20.3	080020	2.7	0.7	1.367	100020	3.3	0.8	2.270
21.7 - 22.3	080022	2.7	0.7	1.436	100022	3.3	0.8	2.378
23.7 - 24.3	080024	2.7	0.7	1.505	100024	3.3	0.8	2.486
25.7 - 26.3	080026	4.0	0.7	1.574	100026	3.3	0.8	2.594
27.7 - 28.3	080028	6.0	2.5	1.643	100028	3.3	0.8	2.702
29.7 - 30.3	080030	8.0	4.5	1.712	100030	4.0	0.8	2.810
31.7 - 32.3	080032	10.0	6.5	1.781	100032	6.0	2.0	2.917
33.7 - 34.3	080034	12.0	8.5	1.850	100034	8.0	4.0	3.025
35.7 - 36.3	080036	14.0	10.5	1.919	100036	10.0	6.0	3.133
37.7 - 38.3	080038	16.0	12.5	1.988	100038	12.0	8.0	3.241
39.7 - 40.3	080040	18.0	14.5	2.057	100040	14.0	10.0	3.349
41.7 - 42.3	080042	20.0	16.5	2.126	100042	16.0	12.0	3.457
43.7 - 44.3	080044	22.0	18.5	2.195	100044	18.0	14.0	3.564
45.7 - 46.3	080046	24.0	20.5	2.264	100046	20.0	16.0	3.672
47.7 - 48.3	080048	26.0	22.5	2.333	100048	22.0	18.0	3.780
49.7 - 50.3	080050	28.0	24.5	2.402	100050	24.0	20.0	3.888
51.7 - 52.3	080052	30.0	26.5	2.471	100052	26.0	22.0	3.996
53.7 - 54.3	080054	32.0	28.5	2.540	100054	28.0	24.0	4.104
55.7 - 56.3	080056	34.0	30.5	2.609	100056	30.0	26.0	4.211
57.7 - 58.3	080058	36.0	32.5	2.678	100058	32.0	28.0	4.319
59.7 - 60.3	080060	38.0	34.5	2.748	100060	34.0	30.0	4.427
63.7 - 64.3	080064	42.0	38.5	2.885	100064	38.0	34.0	4.643
67.7 - 68.3	080068	46.0	42.5	3.024	100068	42.0	38.0	4.858
71.7 - 72.3	080072	50.0	46.5	3.162	100072	46.0	42.0	5.074
75.7 - 76.3	080076	54.0	50.5	3.300	100076	50.0	46.0	5.290
79.7 - 80.3	080080	58.0	54.5	3.438	100080	54.0	50.0	5.506
83.7 - 84.3	080084	62.0	58.5	3.576	100084	58.0	54.0	5.721
87.7 - 88.3	080088	66.0	62.5	3.714	100088	62.0	58.0	5.937
91.7 - 92.3	080092	70.0	66.5	3.852	100092	66.0	62.0	6.153
95.7 - 96.3	080096	74.0	70.5	3.990	100096	70.0	68.0	6.368
99.7 - 100.3	080100	78.0	74.5	4.128	100100	74.0	70.0	6.584
103.7 - 104.3	080104	82.0	78.5	4.266	100104	78.0	74.0	6.800
107.7 - 108.3	080108	86.0	82.5	4.404	100108	82.0	78.0	7.015
111.7 - 112.3	080112	90.0	86.5	4.542	100112	86.0	82.0	7.231
115.7 - 116.3	—	—	—	—	100116	90.0	86.0	7.447
119.7 - 120.3	—	—	—	—	100120	94.0	90.0	7.662
123.7 - 124.3	—	—	—	—	100124	98.0	94.0	7.878
127.7 - 128.3	—	—	—	—	100128	102.0	98.0	8.094
131.7 - 132.3	—	—	—	—	100132	106.0	102.0	8.309
135.7 - 136.3	—	—	—	—	100136	110.0	106.0	8.525
139.7 - 140.3	—	—	—	—	100140	114.0	110.0	8.741