

REV.
A

MA3430

FEDERAL SUPPLY CLASS
5310

RATIONALE

THE DOCUMENT WAS REVISED TO ADD THE CADMIUM STATEMENT.


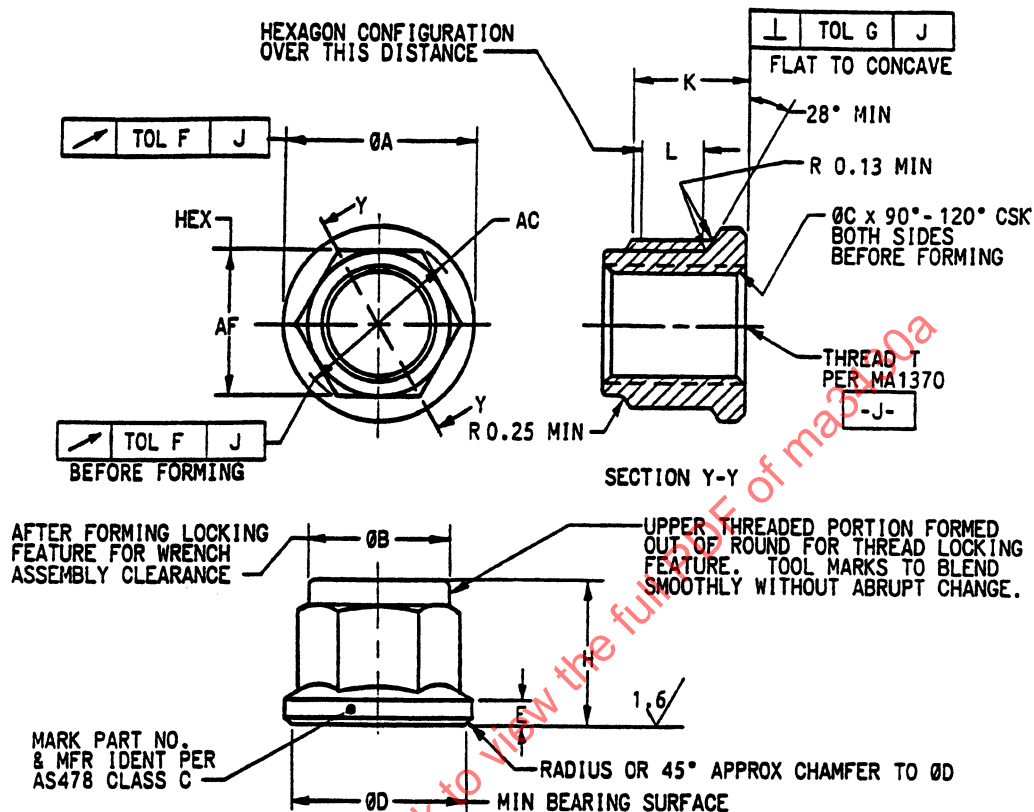


TABLE 1 - DIMENSIONS

PART NO.	THREAD T	AF	1/	AC MIN	A MAX	B MAX	C
MA3430-05	MJ5 x 0.8-4H6H	6.85 - 7.00	h12	7.6	9.1	7.0	5.2 - 5.8
MA3430-06	MJ6 x 1-4H5H	7.85 - 8.00	h12	8.7	10.6	8.0	6.3 - 7.1
MA3430-07	MJ7 x 1-4H5H	8.78 - 9.00	h13	9.8	12.1	9.0	7.3 - 8.1
MA3430-08	MJ8 x 1-4H5H	9.78 - 10.00	h13	10.9	13.6	10.0	8.3 - 9.1
MA3430-10	MJ10 x 1.25-4H5H	11.73 - 12.00	h13	13.2	16.7	12.0	10.3 - 11.1
MA3430-12	MJ12 x 1.25-4H5H	14.73 - 15.00	h13	16.6	19.9	15.0	12.3 - 13.1

1/ TOLERANCE GRADES TO ANSI B4.2-1978

THIRD ANGLE PROJECTION



PREPARED BY SAE E-25

SAE Aerospace
An SAE International Group

METRIC AEROSPACE STANDARD

NUT, SELF LOCKING-REDUCED HEX DRIVE,
AMS 6322, CADMIUM PLATED,
MJ THREAD, METRIC

MA3430
SHEET 1 OF 2

**REV.
A**