

MAP 1753-83
1 November 1985

ACCEPTANCE NOTICE

This nongovernment document was adopted on 1 November 1985 and is approved for use by DoD. The indicated industry group has furnished the clearance required by existing regulations. Copies of the document are stocked by DoD Single Stock Point, Naval Publications and Forms Center, Philadelphia, PA 19120, for issue to DoD activities only. Contractors and industry groups must obtain copies directly from Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

Title of Document: HOLE SIZES, RECOMMENDED FOR METRIC FASTENERS
ON PROPULSION EQUIPMENT

Document No: MAP 1753-83

Date of Specific Issue Adopted: November 1983

Releasing Industry Group: Society of Automotive Engineers, Inc.

NOTICE: When reaffirmation, amendment, revision, or cancellation of this standard is initially proposed, the industry group responsible for this standard shall inform the military coordinating activity of the proposed change and request participation.

Custodians: Military Coordinating Activity:

Army - AR
Navy - AS
Air Force - 99

Army - AR
(Project 53GP-0166)

Review Activities:

Army - AV
Air Force - 82
DLA - IS

Agent:

DLA - IS

THIS DOCUMENT CONTAINS 1 PAGES.

FSC 53GP

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Distributed under license from the IHS Archive



400 COMMONWEALTH DRIVE, WARRENDALE, PA 15096

METRIC AEROSPACE RECOMMENDED PRACTICES

MAP 1753

Issued 11-1-83
Revised

HOLE SIZES, RECOMMENDED FOR METRIC FASTENERS ON PROPULSION EQUIPMENT

1. PURPOSE:

- 1.1 Scope: To establish recommended hole sizes for use with protruding head metric threaded fasteners primarily used on propulsion equipment and provide the recommended positional tolerance for use with these holes.
- 1.2 Application: The data for hole sizes and the positional tolerances provided in this document are suitable for protruding head fasteners based on the dimensional data in MA1518 for sizes 3 thru 20 mm nominal diameter, and with a strength class less than 1250 MPa.
2. APPLICABLE DOCUMENTS: The following publications form a part of this document to the extent specified herein:

MA1518 - Bolt, Screw and Nuts - External Wrenching Metric Threads - Design Parameters for

ANSI B4.2 - Preferred Metric Limits and Fits

3. FASTENER CLEARANCE HOLE:

- 3.1 Normal Clearance: The recommended clearance holes for use with externally threaded fasteners with a coarse tolerance shank, as defined in MA1518, are shown in Table I.
- 3.2 Close Clearance: The recommended hole sizes in Table II are for use in conjunction with externally threaded fasteners with a shank tolerance less than f7, see ANSI B4.2, where alignment of assembled parts, wall thickness or other criteria necessitate the use of the close tolerance shank fastener.
- 3.3 Hole Chamfer or Counterbore: The entering side of the holes should be provided with a chamfer or counterbore to provide sufficient clearance to avoid crushing the underhead fillet radius on the fastener, see Figure 1. Data for the recommended chamfer or counterbore including minimum edge distance (B_{min}) are shown in Table I and II, as applicable. The optional method of providing clearance by use of a counterbore is not recommended for notch sensitive materials or in areas subject to cyclic loading.

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

MAP 1753

- 2 -

4. **POSITIONAL TOLERANCES:** The positional tolerances for holes are provided in Table I and II, as applicable. These tolerances are applicable where two or more parts with the same clearance hole diameter are assembled with fasteners, and it is desired to use the same positional tolerance for the parts to be assembled. Where one of the mating parts has an aligning feature, the positional tolerances in the Tables should be divided by two. Typical applications of fixed fasteners are:

Bolts or screws that mate with threaded holes
 Studs
 Countersunk fasteners

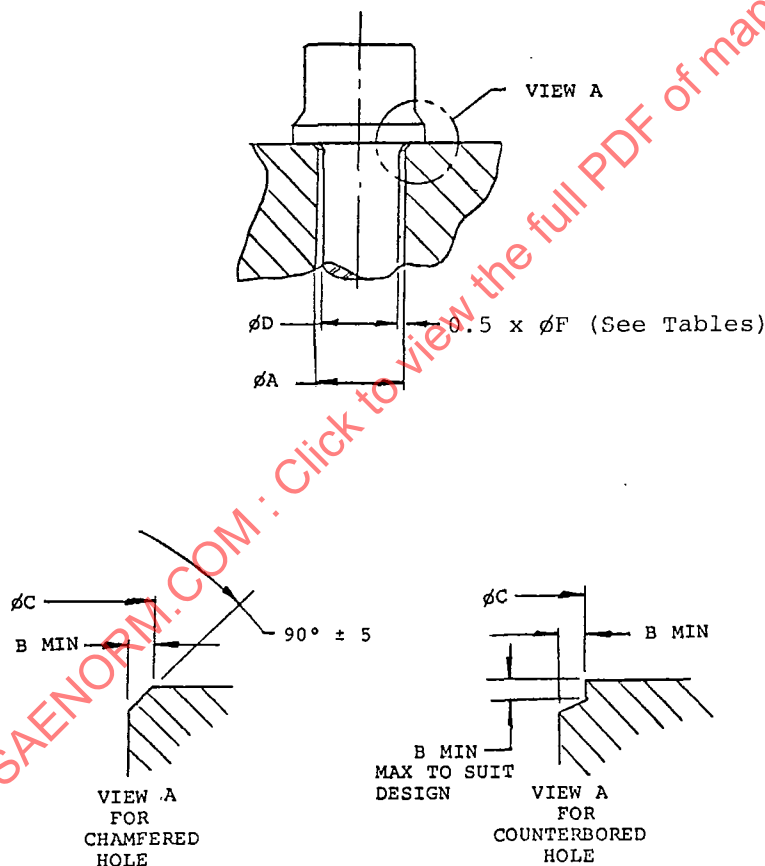


FIGURE 1

- 3 -

MAP 1753

TABLE I

COARSE TOLERANCE SHANK FASTENERS-RECOMMENDED
NORMAL CLEARANCE HOLES AND POSITIONAL TOLERANCES

Dimensions in millimetres

ϕD Nominal Thread Size	$R_{\max}$	ϕA Tol: H13 See Note 6	ϕC Tol: H14 See Note 6	$B_{\min}$	Max. True Positional Tolerance for ϕA at MMC ϕF
3	0.4	3.30- 3.48	4.00- 4.30	0.3	0.3
4	0.4	4.40- 4.58	5.10- 5.40	0.3	0.4
5	0.5	5.50- 5.68	6.40- 6.76	0.4	0.5
6	0.7	6.60- 6.82	7.90- 8.26	0.5	0.6
7	0.7	7.70- 7.92	9.00- 9.36	0.5	0.7
8	0.7	8.80- 9.02	10.10-10.53	0.5	0.8
10	0.8	10.80-11.07	12.20-12.63	0.6	0.8
12	0.9	12.80-13.07	14.40-14.83	0.7	0.8
14	1.1	14.80-15.07	16.80-17.23	0.9	0.8
16	1.1	16.80-17.07	18.80-19.32	0.9	0.8
18	1.3	18.80-19.13	21.10-21.62	1.1	0.8
20	1.3	20.80-21.13	23.10-23.62	1.1	0.8

- $R_{\max}$ = Max. underhead fillet radius per MA1518.
- $\phi A_{\min} = \phi D_{\text{nom}} + \text{Clearance};$
where clearance = $0.1 \times \phi D_{\text{nom}}$, but not exceeding 0.8.
- $\phi C_{\min} = \phi A_{\min} + 2 \times 0.9 \times R_{\max}$; rounded to nearest 0.1.
- $B_{\min} = 0.9 \times R_{\max} - 0.1$; rounded to nearest 0.1.
- $\phi F = \phi A_{\min} - \phi D_{\text{nom}}$
- Tolerances selected from ANSI B4.2.