

First edition
2012-09-15

AMENDMENT 1
2021-01

**Space systems — Test procedure to
evaluate spacecraft material ejecta
upon hypervelocity impact**

AMENDMENT 1: Oblique impacts and
Annex C update

STANDARDSISO.COM : Click to view the full PDF of ISO 11227:2012/Amd 1:2021



Reference number
ISO 11227:2012/Amd.1:2021(E)

© ISO 2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

STANDARDSISO.COM : Click to view the full PDF of ISO 11227:2012/Amd 1:2021

Space systems — Test procedure to evaluate spacecraft material ejecta upon hypervelocity impact

AMENDMENT 1: Oblique impacts and Annex C update

Annex C, second paragraph

Replace the last sentence with the following:

Recent experimental set-up and preliminary results are described by Y. Fujimura *et al.*^[15] and by A. Francesconi *et al.*^[21].

Annex C, b), first paragraph

Replace the last sentence with the following:

A possible set-up, such as the one used at the Kyushu Institute of Technology^[9] is shown in Figures C.1 to C.4.

Annex C, b), second paragraph

Replace the last sentence with the following:

As evidenced by K. Sugahara^[16], it is difficult and time-consuming to identify impact features smaller than 25 µm in diameter.

Annex C, c), second paragraph

Replace the text with the following:

The value given by Cour-Palais, $C = 1,28$ (see References [17] and [18]) can be chosen for use in this document. As an example, the D/d ratio for an ejecta velocity of 1 km/s is close to 1,3, whereas it is close to 3,9 for an ejecta velocity of 5 km/s.

Annex C, c), fourth paragraph

Replace the text with the following:

The size of the ejecta can also be derived from the size of perforations obtained on a thin witness foil. In this case, the size of the holes is the same as the size of the particles, when the foil is thin compared to the size of the ejecta (see Reference [19]).

Annex C, d), first paragraph

Replace the first sentence with the following:

Recovery of intact fragments is possible using, instead of metal witness plates, a low-density material such as silica aerogel (see Figure C.5), or a soft material such as foam or cardboard.


Annex C, e), first paragraph

Replace the first sentence with the following:

The velocity (and also the spatial distribution) of the ejecta can be measured with a high-speed video camera, as shown on Figure C.6.

Annex C

Add the following two figures after Figure C.2 and renumber the subsequent figures:

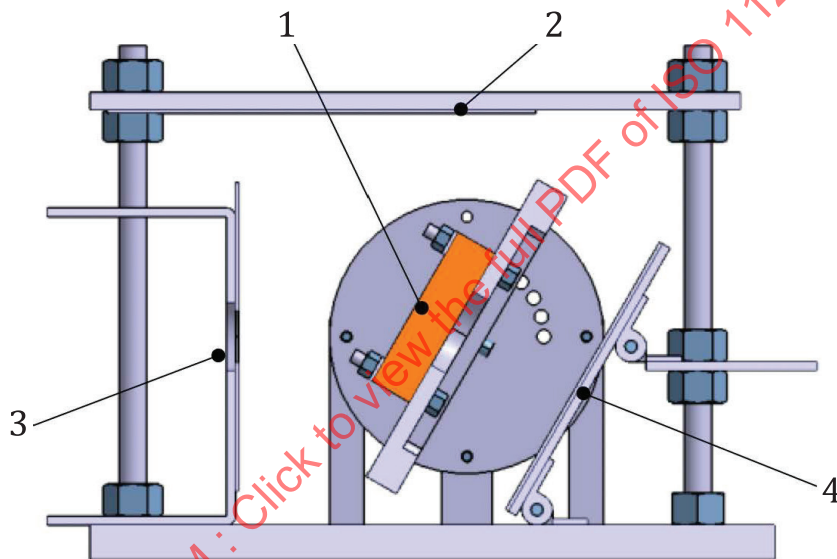

Key

- 1 target
- 2 witness plate (top)
- 3 witness plate (front)
- 4 witness plate (back)

NOTE The front witness plate can be removed when the front ejecta is negligible.

Figure C.3 — Sketch of target and witness plate assembly for oblique impact