
**Basic human body measurements for
technological design —**

**Part 1:
Body measurement definitions and
landmarks**

*Définitions des mesures de base du corps humain pour la conception
technologique —*

Partie 1: Définitions des mesures du corps et repères



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 7250-1:2008



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	v
Introduction	vi
1 Scope	1
2 Terms and definitions.....	1
2.2 Anthropometric terms	1
3 Measuring conditions and instruments.....	4
3.1 Conditions	4
3.2 Instruments	4
3.3 Further conditions	4
4 Basic anthropometric measurements	5
4.1 Measurements taken while subject stands	5
4.1.1 Body mass (weight).....	5
4.1.2 Stature (body height).....	5
4.1.3 Eye height.....	5
4.1.4 Shoulder height.....	6
4.1.5 Elbow height.....	6
4.1.6 Iliac spine height, standing.....	6
4.1.7 Crotch height.....	7
4.1.8 Tibial height.....	7
4.1.9 Chest depth, standing	8
4.1.10 Body depth, standing	8
4.1.11 Chest breadth, standing.....	9
4.1.12 Hip breadth, standing.....	9
4.2 Measurements taken while subject sits	10
4.2.1 Sitting height (erect).....	10
4.2.2 Eye height, sitting.....	10
4.2.3 Cervicale height, sitting.....	10
4.2.4 Shoulder height, sitting.....	11
4.2.5 Elbow height, sitting.....	11
4.2.6 Shoulder-elbow length	11
4.2.7 Elbow-wrist length	12
4.2.8 Shoulder (biacromial) breadth.....	12
4.2.9 Shoulder (bideltoid) breadth.....	12
4.2.10 Elbow-to-elbow breadth	13
4.2.11 Hip breadth, sitting	13
4.2.12 Lower leg length (popliteal height)	13
4.2.13 Thigh clearance.....	14
4.2.14 Knee height	14
4.2.15 Abdominal depth, sitting.....	14
4.2.16 Thorax depth at the nipple.....	15
4.2.17 Buttock-abdomen depth sitting.....	15
4.3 Measurements on specific body segments	15
4.3.1 Hand length	15
4.3.2 Palm length perpendicular.....	16
4.3.3 Hand breadth at metacarpals	16
4.3.4 Index finger length.....	16
4.3.5 Index finger breadth, proximal	17
4.3.6 Index finger breadth, distal.....	17
4.3.7 Foot length	17
4.3.8 Foot breadth	18

4.3.9	Head length	18
4.3.10	Head breadth	18
4.3.11	Face length (nasion-menton)	18
4.3.12	Head circumference	19
4.3.13	Sagittal arc	19
4.3.14	Bitracion arc	19
4.4	Functional measurements	20
4.4.1	Wall-acromion distance	20
4.4.2	Grip reach; forward reach	20
4.4.3	Elbow-grip length	21
4.4.4	Fist (grip axis) height	21
4.4.5	Forearm-fingertip length	21
4.4.6	Buttock-popliteal length (seat depth)	22
4.4.7	Buttock-knee length	22
4.4.8	Neck circumference	22
4.4.9	Chest circumference	23
4.4.10	Waist circumference	23
4.4.11	Wrist circumference	24
4.4.12	Thigh circumference	24
4.4.13	Calf circumference	24
	Bibliography	25

STANDARDSISO.COM : Click to view the full PDF of ISO 7250-1:2008

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7250-1 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 3, *Anthropometry and biomechanics*.

This first edition of ISO 7250-1 cancels and replaces ISO 7250:1996, of which it constitutes a minor revision.

ISO 7250 consists of the following parts, under the general title *Basic human body measurements for technological design*:

— *Part 1: Body measurement definitions and landmarks*

Statistical summaries of body measurements from individual ISO populations and worldwide and regional design values for use in ISO equipment standards are to form the subjects of future Parts 2 and 3.

Introduction

The well-being of people is greatly dependent on their geometrical relationship with various factors such as clothing, places of work, transportation, homes and recreational activities. To ensure harmony between people and their environments, it is necessary to quantify the size and shape of people for optimization of the technological design of the workplace and the home environment.

STANDARDSISO.COM : Click to view the full PDF of ISO 7250-1:2008

Basic human body measurements for technological design —

Part 1:

Body measurement definitions and landmarks

1 Scope

This part of ISO 7250 provides a description of anthropometric measurements which can be used as a basis for comparison of population groups.

The basic list specified in this part of ISO 7250 is intended to serve as a guide for ergonomists who are required to define population groups and apply their knowledge to the geometric design of the places where people work and live.

This list is not intended to serve as a guide for how to take anthropometric measurements, but it gives information to the ergonomist and designer on the anatomical and anthropometrical bases and principles of measurement which are applied in the solution of design tasks.

This part of ISO 7250 is intended to be used in conjunction with national or international regulations or agreements to assure harmony in defining population groups. In its various applications, it is anticipated that the basic list will be supplemented by specific additional measurements.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

population group

group of people having some common environment or activity

NOTE These groups may be as diverse as geographically defined populations or specified age groups.

2.2 Anthropometric terms¹⁾

2.2.1

acromion

most lateral point of the lateral edge of the spine of the scapula

NOTE The height of the acromion is usually equated with shoulder height.

2.2.2

anterior

ventral

towards the front of the body

1) A detailed glossary of terms is found in the publications listed in the Bibliography.

2.2.3

bi

prefix denoting connection with, or relation to, each of two symmetrical paired parts

NOTE For example, biacromial, bitragion.

2.2.4

biceps femoris

one of the large posterior muscles in the thigh of the leg

2.2.5

cervicale

prominent bone at the base of the back of the neck (spinous process of the seventh cervical vertebra)

2.2.6

deltoid muscle

large muscle on the lateral border of the upper arm in the shoulder region

2.2.7

distal

away from the main mass of the body

2.2.8

Frankfurt plane

standard horizontal plane at the level of the upper edge of the opening of the external auditory meatus (external ear opening) and the lower border of the orbital margin (lower edge of the eye socket), when the median plane of the head is held vertically

2.2.9

glabella

most anterior point of the forehead between the brow ridges in the midsagittal plane

2.2.10

gluteal fold

skin furrow between the buttock and the thigh

2.2.11

grip axis

axis of the fist corresponding with the longitudinal axis of a rod held in the hand

2.2.12

inferior

caudal

away from the head, towards the bottom

2.2.13

inion

lowest point in the midsagittal plane of the occiput that can be palpated amid the nuchal muscles

2.2.14

lateral

towards the side of the body

2.2.15

medial

towards the midline of the body

2.2.16

menton

gnathion

lowest point of the tip of the chin in the midsagittal plane

2.2.17

mesosternal

point on the union of the third and fourth sternebrae

2.2.18

metacarpal

pertaining to the long bones of the hand between the carpals (wristbones) and the phalanges

2.2.19

nasion

sellion

point of greatest indentation of the nasal root depression

2.2.20

phalanx

phalange

bone of the fingers or toes

2.2.21

posterior

dorsal

towards the back of the body

2.2.22

process

marked prominence of a bone

2.2.23

proximal

towards the main mass of the body

2.2.24

radius

long bone in the forearm on the thumb side

2.2.25

sagittal

pertaining to the anteroposterior (front to back) median plane of the body (midsagittal), or to a plane parallel to the median (parasagittal)

2.2.26

styloid process

most distal protuberance of the radius or the ulna at the wrist

2.2.27

superior

cranial

towards the head, towards the top

2.2.28

thyroid cartilage

prominent cartilage on the anterior surface of the neck

2.2.29

tibiale

point at the upper inside (medial) edge on the proximal end of the tibial bone of the lower leg

2.2.30

tragion

notch just above the tragus (the small cartilaginous flap in front of the ear hole)

2.2.31

ulna

long bone in the forearm on the little finger side

2.2.32

vertex

highest level of the head in the midsagittal plane, with the head oriented in the Frankfurt plane

3 Measuring conditions and instruments

3.1 Conditions

It is important that the following conditions be documented together with the numerical results of any survey. Photographs or detailed sketches of measurements and procedures are recommended.

a) Clothing of subject

During measurement, the subject shall be nude or shall wear only minimal clothing and shall be bareheaded and without shoes.

b) Support surfaces

Standing surfaces (floors), platforms or sitting surfaces shall be flat, horizontal and not compressible.

c) Body symmetry

For measurements which may be taken on either side of the body, it is recommended that both sides be measured. If this is not possible, it should be indicated on which side the measurement was taken.

3.2 Instruments

The standard measuring instruments recommended are the anthropometer, sliding calipers, spreading calipers, weighing scale and tape measure.

3.2.1 Anthropometer, a specialized tool used for measuring linear distances between points on the body and standard reference surfaces, such as the floor or a seat platform.

3.2.2 Sliding and spreading calipers, used for measuring the breadth and depth of body segments, as well as the distances between reference marks.

3.2.3 Tape measure, used for measuring body circumferences.

3.2.3.1 Measuring cube, 200 mm on each side, used for determining the maximal posterior protrusion of a seated person.

3.2.3.2 Rod, 20 mm in diameter, used for determining grip measurements.

NOTE For a detailed description of the measuring methods, see Reference [2].

3.3 Further conditions

Chest and other measurements affected by breathing should be taken during gentle breathing.

4 Basic anthropometric measurements

4.1 Measurements taken while subject stands

4.1.1 Body mass (weight)

Description: Total mass (weight) of the body.

Method: Subject stands on a weighing scale.

Instrument: Weighing scale.

4.1.2 Stature (body height)

Description: Vertical distance from the floor to the highest point of the head (vertex). See Figure 1.

Method: Subject stands fully erect with feet together. Head is oriented in the Frankfurt plane.

Instrument: Anthropometer.

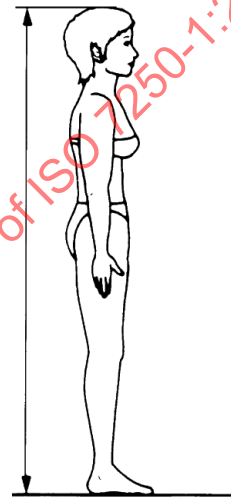


Figure 1 — Stature

4.1.3 Eye height

Description: Vertical distance from the floor to the outer corner of the eye. See Figure 2.

Method: Subject stands fully erect with feet together. Head is oriented in the Frankfurt plane.

Instrument: Anthropometer.

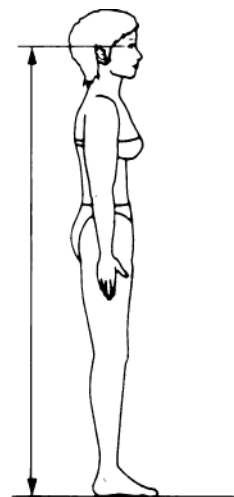


Figure 2 — Eye height

4.1.4 Shoulder height

Description: Vertical distance from the floor to the acromion. See Figure 3.

Method: Subject stands fully erect with feet together. Shoulders are relaxed, with arms hanging freely.

Instrument: Anthropometer.

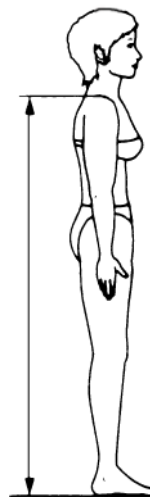


Figure 3 — Shoulder height

4.1.5 Elbow height

Description: Vertical distance from the floor to the lowest bony point of the bent elbow. See Figure 4.

Method: Subject stands fully erect with feet together. Upper arm hangs freely downwards, with forearm flexed at right angles to it.

Instrument: Anthropometer.

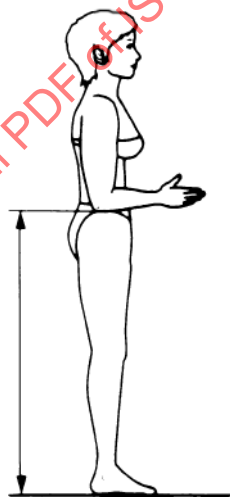


Figure 4 — Elbow height

4.1.6 Iliac spine height, standing

Description: Vertical distance from the floor to the anterosuperior iliac spine (the most downward-directed point of the iliac crest). See Figure 5.

Method: Subject stands fully erect with feet together.

Instrument: Anthropometer.

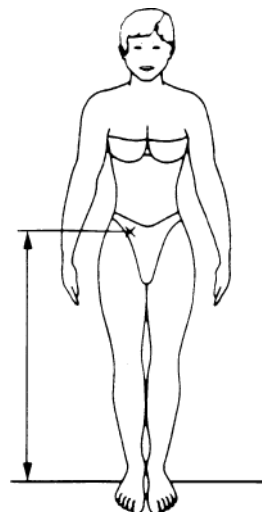


Figure 5 — Iliac spine height, standing

4.1.7 Crotch height

Description: Vertical distance from the floor to the distal part of the inferior ramus of the pubic bone. See Figure 6.

Method: Subject first stands with legs a maximum of 100 mm apart and the movable arm of the measuring instrument is placed against the inner surface of the thigh in such a way that, when pushed higher, it gently presses against the pubic bone. Subject then closes the legs and stands fully erect during the measurement.

Instrument: Anthropometer.

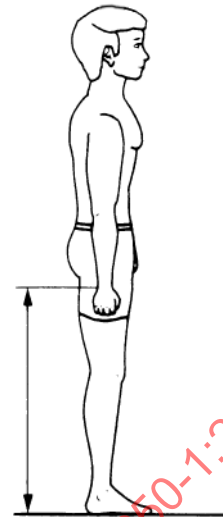


Figure 6 — Crotch height

4.1.8 Tibial height

Description: Vertical distance from the floor to the tibiale. See Figure 7.

Method: Subject stands fully erect with feet together.

Instrument: Anthropometer.

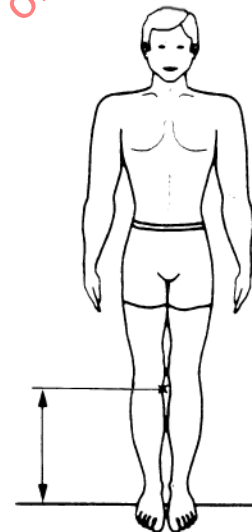


Figure 7 — Tibial height

4.1.9 Chest depth, standing

Description: Depth of the torso measured in the midsagittal plane at mesosternal level. See Figure 8.

Method: Subject stands fully erect with feet together. Arms hang freely downwards.

Instrument: Large sliding caliper with curved arms.



Figure 8 — Chest depth, standing

4.1.10 Body depth, standing

Description: Maximum depth of the body. See Figure 9.

Method: Subject stands erect against a wall with feet together and arms hanging freely downwards.

Instrument: Anthropometer.



Figure 9 — Body depth, standing

4.1.11 Chest breadth, standing

Description: Breadth of the torso measured at mesosternal level. See Figure 10.

Method: Subject stands fully erect with feet together and arms hanging freely downwards.

Instrument: Anthropometer (large sliding caliper), large spreading caliper.

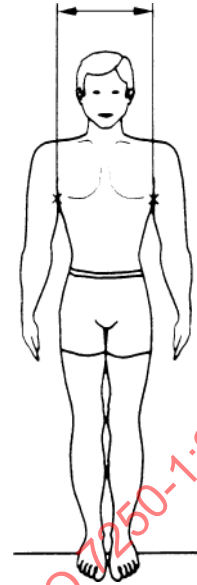


Figure 10 — Chest breadth, standing

4.1.12 Hip breadth, standing

Description: Maximum horizontal distance across the hips. See Figure 11.

Method: Subject stands erect with feet together. Measurement is taken without pressing into the flesh of the hips.

Instrument: Anthropometer (large sliding caliper), large spreading caliper.

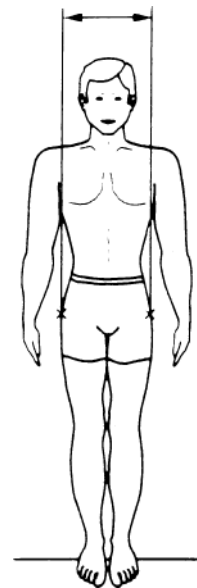


Figure 11 — Hip breadth, standing

4.2 Measurements taken while subject sits

4.2.1 Sitting height (erect)

Description: Vertical distance from a horizontal sitting surface to the highest point of the head (vertex). See Figure 12.

Method: Subject sits fully erect with thighs fully supported and lower legs hanging freely. Head is oriented in the Frankfurt plane.

Instrument: Anthropometer.



Figure 12 — Sitting height (erect)

4.2.2 Eye height, sitting

Description: Vertical distance from a horizontal sitting surface to the outer corner of the eye. See Figure 13.

Method: Subject sits fully erect with thighs fully supported and lower legs hanging freely. Head is oriented in the Frankfurt plane.

Instrument: Anthropometer.



Figure 13 — Eye height, sitting

4.2.3 Cervicale height, sitting

Description: Vertical distance from a horizontal sitting surface to the cervicale. See Figure 14.

Method: Subject sits fully erect with thighs fully supported and lower legs hanging freely. Head is oriented in the Frankfurt plane.

Instrument: Anthropometer.



Figure 14 — Cervicale height, sitting

4.2.4 Shoulder height, sitting

Description: Vertical distance from a horizontal sitting surface to the acromion. See Figure 15.

Method: Subject sits fully erect with thighs fully supported and lower legs hanging freely. Shoulders are relaxed, with upper arms hanging freely.

Instrument: Anthropometer.



Figure 15 — Shoulder height, sitting

4.2.5 Elbow height, sitting

Description: Vertical distance from a horizontal sitting surface to the lowest bony point of the elbow bent at a right angle with the forearm horizontal. See Figure 16.

Method: Subject sits fully erect with thighs fully supported and lower legs hanging freely. Upper arms hang freely downwards and forearms are horizontal.

Instrument: Anthropometer.

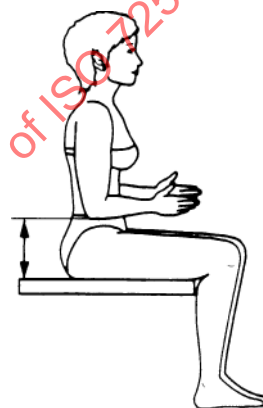


Figure 16 — Elbow height, sitting

4.2.6 Shoulder-elbow length

Description: Vertical distance from acromion to the bottom of the elbow bent at a right angle with the forearm horizontal. See Figure 17.

Method: Subject sits erect with thighs fully supported and lower legs hanging freely. Upper arms hang freely downwards and forearms are horizontal.

Instrument: Anthropometer (large sliding caliper).

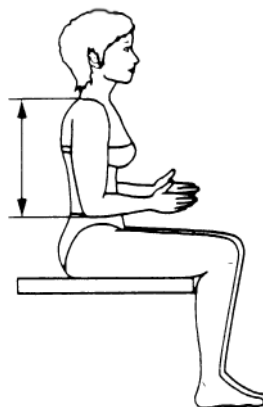


Figure 17 — Shoulder-elbow length

4.2.7 Elbow-wrist length

Description: Horizontal distance from wall to wrist (ulnar styloid process). See Figure 18.

Method: Subject sits or stands erect, back to wall. Upper arms hanging freely downwards, elbows touching wall, forearms horizontal.

Instrument: Anthropometer.



Figure 18 — Elbow-wrist length

4.2.8 Shoulder (biacromial) breadth

Description: Distance along a straight line from acromion to acromion. See Figure 19.

Method: Subject sits or stands fully erect with shoulders relaxed.

Instrument: Large sliding caliper or large spreading caliper.

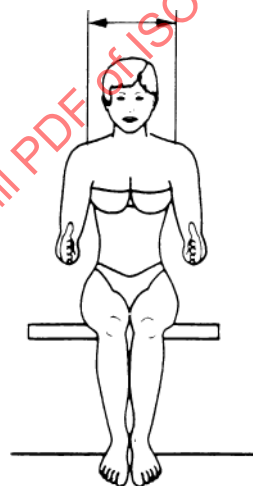


Figure 19 — Shoulder (biacromial) breadth

4.2.9 Shoulder (bideloid) breadth

Description: Distance across the maximum lateral protrusions of the right and left deltoid muscles. See Figure 20.

Method: Subject sits or stands fully erect with shoulders relaxed.

Instrument: Large sliding caliper or large spreading caliper.

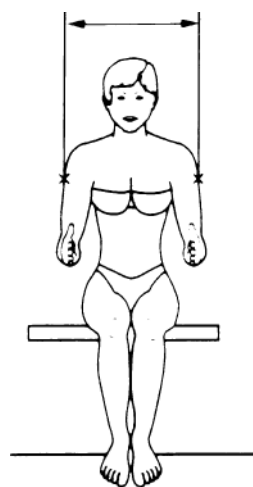


Figure 20 — Shoulder (bideloid) breadth

4.2.10 Elbow-to-elbow breadth

Description: Maximum horizontal distance between the lateral surfaces of the elbow region. See Figure 21.

Method: Subject sits or stands erect with upper arms hanging down and lightly touching the sides of the body. Forearms are extended horizontally and parallel to each other and the floor. Measurement is taken without pressing into the flesh at the elbows.

Instrument: Large sliding caliper or large spreading caliper.

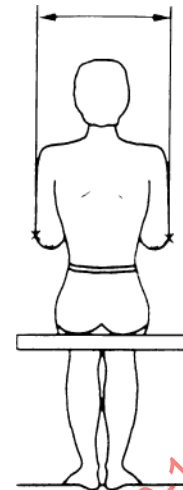


Figure 21 — Elbow-to-elbow breadth

4.2.11 Hip breadth, sitting

Description: Breadth of the body measured across the widest portion of the hips. See Figure 22.

Method: Subject sits with thighs fully supported and lower legs hanging freely, knees together. Measurement is taken without pressing into the flesh of the hips.

Instrument: Large spreading caliper.

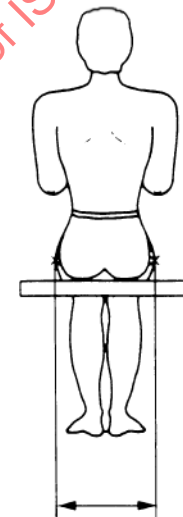


Figure 22 — Hip breadth, sitting

4.2.12 Lower leg length (popliteal height)

Description: Vertical distance from the foot-rest surface to the lower surface of the thigh immediately behind the knee, bent at right angles. See Figure 23.

Method: Subject holds thigh and lower leg at right angles during measurement. Subject may sit, or stand with the foot placed on a raised platform. The movable arm of the measuring instrument is pushed gently against the tendon of the relaxed biceps femoris muscle.

Instrument: Anthropometer.

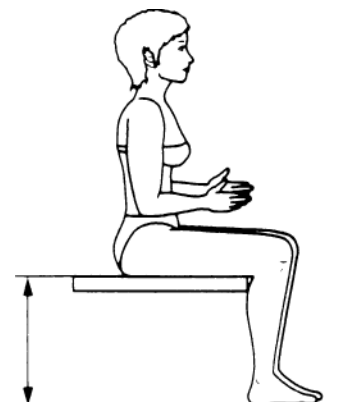


Figure 23 — Lower leg length (popliteal height)

4.2.13 Thigh clearance

Description: Vertical distance from the sitting surface to the highest point on the thigh. See Figure 24.

Method: Subject sits erect with knees bent at right angles, supporting the feet flat on the floor.

Instrument: Anthropometer.

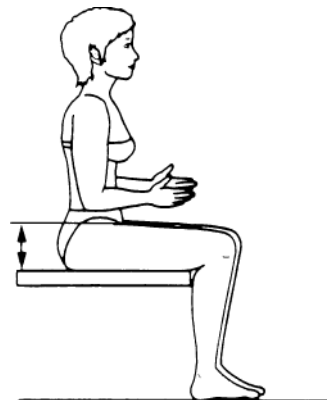


Figure 24 — Thigh clearance

4.2.14 Knee height

Description: Vertical distance from the floor to the highest point of the superior border of the patella. See Figure 25.

Method: Subject sits erect with knees bent at right angles, supporting the feet flat on the floor.

Instrument: Anthropometer.

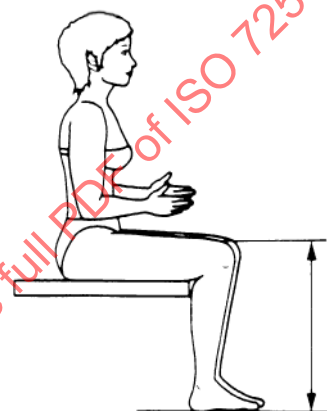


Figure 25 — Knee height

4.2.15 Abdominal depth, sitting

Description: Maximum depth of the abdomen whilst sitting. See Figure 26.

Method: Subject sits fully erect, arms hanging freely downwards.

Instrument: Anthropometer (large sliding caliper).

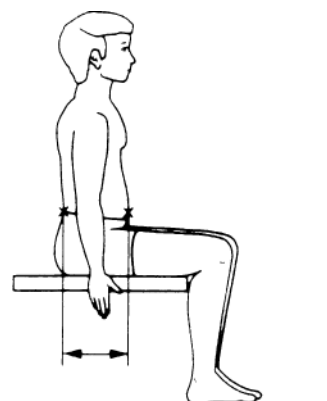


Figure 26 — Abdominal depth, sitting

4.2.16 Thorax depth at the nipple

Description: Maximum depth of the thorax at the level of the nipple. See Figure 27.

Method: Subject sits or stands fully erect, arms hanging freely downwards. Females wear their usual brassiere.

Instrument: Anthropometer (large sliding caliper).



Figure 27 — Thorax depth at the nipple

4.2.17 Buttock-abdomen depth sitting

Description: Projective maximum depth of the lower torso between the maximum anterior protrusion of the abdomen and the maximum posterior protrusion of the buttock. See Figure 28.

Method: Subject sits fully erect with thighs fully supported and lower legs hanging freely, with rearmost point of the buttocks touching the surface of a vertical panel. Distance is measured from the vertical panel to the maximum anterior protrusion of the abdomen.

Instrument: Anthropometer.



Figure 28 — Buttock-abdomen depth sitting

4.3 Measurements on specific body segments

4.3.1 Hand length

Description: Perpendicular distance from a line drawn between the styloid processes to the tip of the middle finger. See Figure 29.

Method: Subject holds the forearm horizontal with hand stretched out flat, palm up. The point of measurement at the styloid process corresponds approximately to the middle skin furrow of the wrist.

Instrument: Sliding caliper.

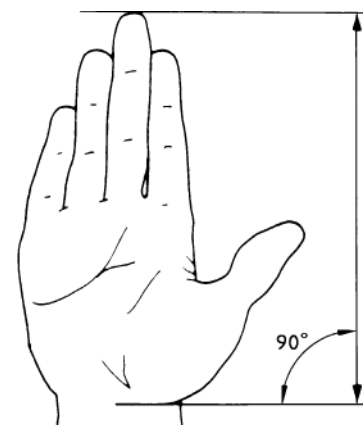


Figure 29 — Hand length

4.3.2 Palm length perpendicular

Description: Distance from a line drawn between the styloid processes to the proximal fingercrease of the middle finger on the palm of the hand. See Figure 30.

Method: Subject holds forearm horizontal with hand stretched out flat, palm up. Measurement is taken on the palmar surface of the hand.

Instrument: Sliding caliper.

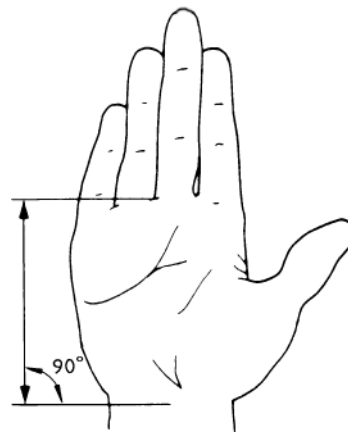


Figure 30 — Palm length perpendicular

4.3.3 Hand breadth at metacarpals

Description: Projected distance between radial and ulnar metacarpals at the level of the metacarpal heads from the second to the fifth metacarpal. See Figure 31.

Method: Subject holds forearm horizontal with hand stretched out flat, palm up.

Instrument: Sliding caliper.

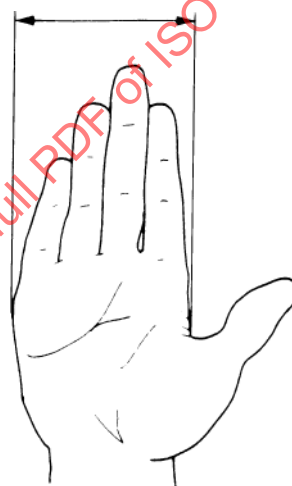


Figure 31 — Hand breadth at metacarpals

4.3.4 Index finger length

Description: Distance from the tip of the second finger to the proximal fingercrease on the palm of the hand. See Figure 32.

Method: Subject holds forearm horizontal with hand stretched out flat and fingers spread, palm up. Measurement is taken on the palmar surface of the hand.

Instrument: Sliding caliper.

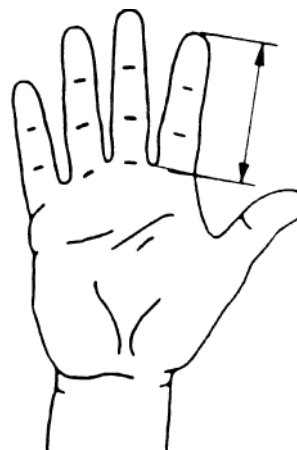


Figure 32 — Index finger length

4.3.5 Index finger breadth, proximal

Description: Maximum distance between medial and lateral surfaces of the second finger in the region of the joint between middle and proximal phalanges. See Figure 33.

Method: Subject holds forearm horizontal with hand stretched out flat and fingers spread, palm up.

Instrument: Sliding caliper.



Figure 33 — Index finger breadth, proximal

4.3.6 Index finger breadth, distal

Description: Maximum distance between medial and lateral surfaces of the second finger in the region of the joint between middle and distal phalanges. See Figure 34.

Method: Subject holds the forearm horizontal with hand stretched out flat and fingers spread, palm up.

Instrument: Sliding caliper.



Figure 34 — Index finger breadth, distal

4.3.7 Foot length

Description: Maximum distance from rear of the heel to tip of the longest (first or second) toe, measured parallel to the longitudinal axis of the foot. See Figure 35.

Method: Subject stands with weight equally distributed on both feet.

Instrument: Anthropometer.



Figure 35 — Foot length

4.3.8 Foot breadth

Description: Maximum distance between medial and lateral surfaces of the foot perpendicular to the longitudinal axis of the foot. See Figure 36.

Method: Subject stands with weight equally distributed on both feet.

Instrument: Spreading caliper.



Figure 36 — Foot breadth

4.3.9 Head length

Description: Distance along a straight line between the glabella and the rearmost point of the skull. See Figure 37.

Method: Position of head has no influence on the measurement.

Instrument: Spreading caliper.



Figure 37 — Head length

4.3.10 Head breadth

Description: Maximum breadth of head above the ears, measured perpendicular to the midsagittal plane. See Figure 38.

Method: Position of head has no influence on the measurement.

Instrument: Spreading caliper.



Figure 38 — Head breadth

4.3.11 Face length (nasion-menton)

Description: Distance between nasion and menton. See Figure 39.

Method: Subject keeps mouth closed. Head is oriented in the Frankfurt plane.

Instrument: Spreading caliper.




Figure 39 — Face length (nasion-menton)

4.3.12 Head circumference

Description: Maximum, approximately horizontal, circumference of head measured above the glabella and crossing the rearmost point of the skull. See Figure 40.

Method: Tape measure is held on the glabella and led around the head so as to pass over the rearmost point of the skull. Hair shall be included in the measurement.

Instrument: Tape measure.

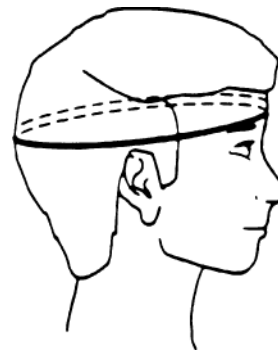


Figure 40 — Head circumference

4.3.13 Sagittal arc

Description: Arc from the glabella over the skull to the inion. See Figure 41.

Method: Tape measure is held on the glabella and led over the head so as to pass over the rearmost point of the skull to the inion. Hair shall be included in the measurement.

NOTE The inion can be found by the point in the nuchal muscle depression just posterior to the inion.

Instrument: Tape measure.

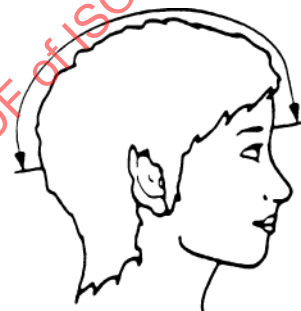


Figure 41 — Sagittal arc

4.3.14 Bitragion arc

Description: Arc from one tragon over the crown of the head to the other tragon. See Figure 42.

Method: Tape measure is held on the tragon of one side of the head and led over the crown to the tragon on the other side. Hair shall be included in the measurement.

Instrument: Tape measure.

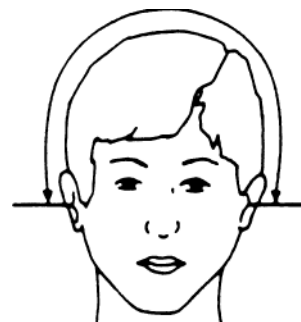


Figure 42 — Bitragion arc