

REV.
A

AS1734

SAE Technical Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and the applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

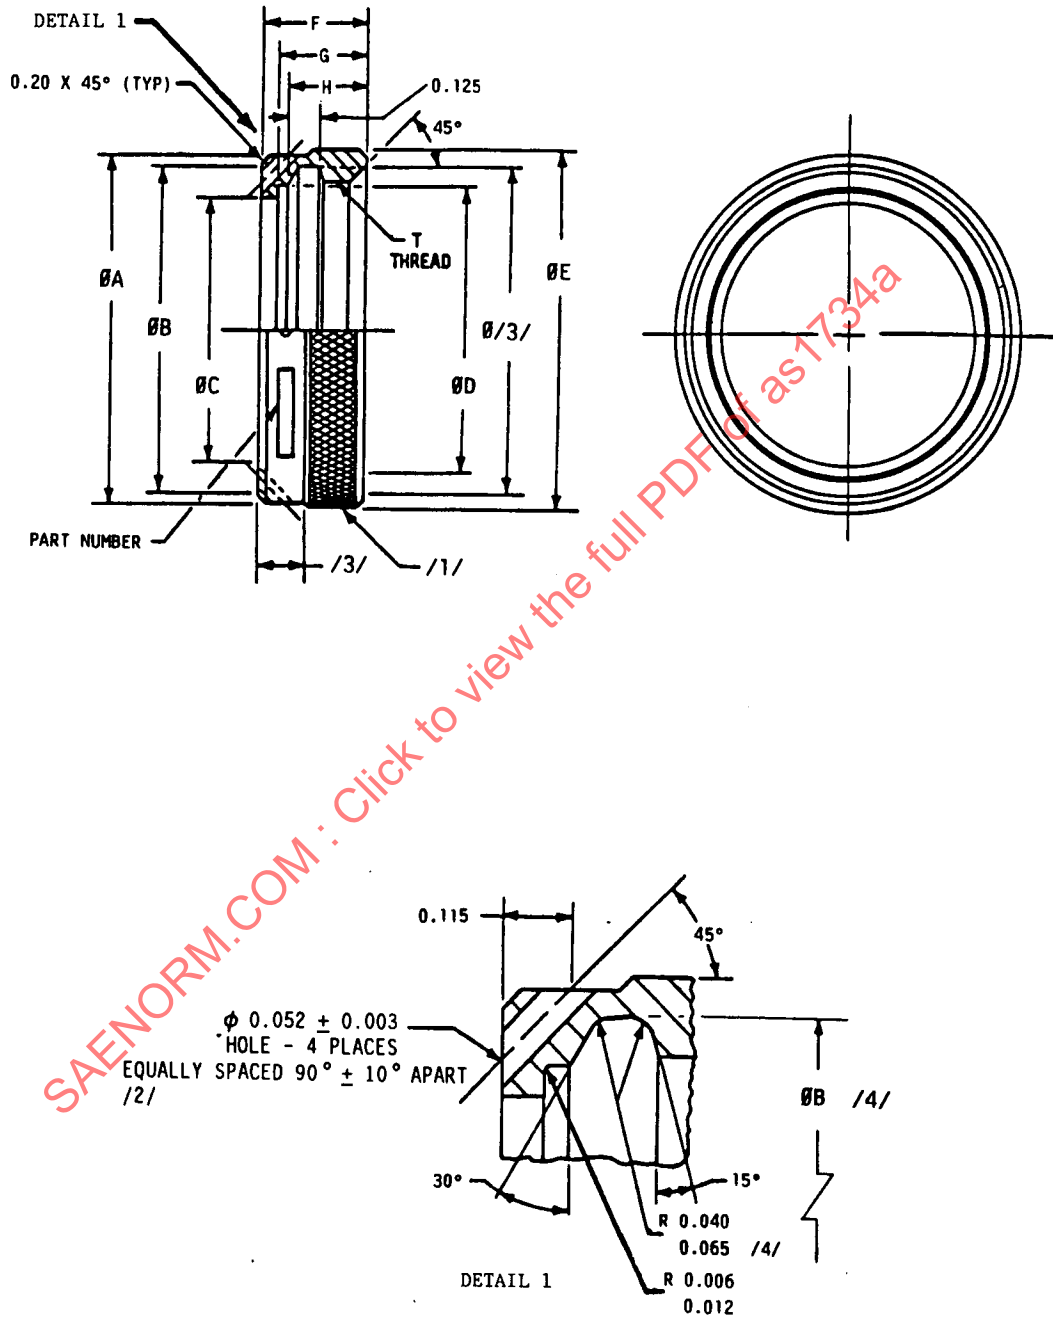


FIGURE 1

CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: AS1730

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive Warrendale, PA 15096-0001

AEROSPACE STANDARD

NUT, COUPLING, RIGID,
FIXED CAVITY, THREADED,
FERRULE TYPE TUBE ENDS, TYPE I

AS1734

SHEET 1 OF 3

REV.

A

ISSUED 1984-01 REVISED 1991-10-30

TABLE 1 - NUT DIMENSIONS AND WEIGHTS

AS1734 DASH NUMBER	TUBE SIZE (REF)	THREAD T PER H28/2	ØA + .010/- .000	ØB + .010/- .000	ØC + .005/- .000	ØD DIA	ØD TOL	ØE MAX	F	G + .010/- .000	H	WEIGHT MAX LB
04	.250	.687-12 UN-28	.787	.691	.529	.583	+ .002/- .000	.829	.408	.338	.300	.008
05	.312	.750-12 UN-28	.850	.753	.580	.644	+ .002/- .000	.892	.408	.338	.300	.009
06	.375	.812-12 UN-28	.912	.816	.635	.689	+ .002/- .000	.954	.408	.338	.300	.010
08	.500	.937-12 UN-28	1.037	.941	.762	.815	+ .003/- .000	1.079	.408	.338	.300	.012
10	.625	1.062-12 UN-28	1.172	1.066	.900	.960	+ .003/- .000	1.214	.424	.354	.315	.013
12	.750	1.250-12 UNF-28	1.360	1.253	1.033	1.128	+ .003/- .000	1.402	.424	.354	.315	.015
16	1.000	1.500-12 UNF-28	1.610	1.503	1.284	1.386	+ .003/- .000	1.652	.424	.354	.315	--
20	1.250	1.750-12 UN-28	1.860	1.753	1.534	1.628	+ .003/- .000	1.902	.484	.414	.375	.026
24	1.500	2.000-12 UN-28	2.110	2.003	1.783	1.878	+ .003/- .000	2.152	.499	.429	.375	.028
28	1.750	2.250-12 UN-28	2.360	2.253	2.045	2.138	+ .003/- .000	2.402	.499	.429	.375	.030
32	2.000	2.500-12 UN-28	2.620	2.503	2.292	2.382	+ .003/- .000	2.662	.499	.429	.375	.035
36	2.250	2.750-12 UN-28	2.870	2.753	2.549	2.638	+ .003/- .000	2.912	.560	.455	.392	.042
40	2.500	3.000-12 UN-28	3.125	3.003	2.800	2.888	+ .003/- .000	3.162	.560	.455	.392	--
44	2.750	3.250-12 UN-28	3.370	3.253	3.045	3.138	+ .003/- .000	3.412	.560	.455	.392	.052
48	3.000	3.625-12 UN-28	3.751	3.628	3.395	3.513	+ .004/- .000	3.793	.560	.455	.392	.080
56	3.500	4.125-12 UN-28	4.256	4.128	3.895	4.013	+ .004/- .000	4.298	.560	.455	.392	.090
64	4.000	4.625-12 UN-28	4.756	4.613	4.395	4.513	+ .004/- .000	4.798	.560	.455	.475	.133
72	4.500	5.125-12 UN-28	5.266	5.113	4.895	5.015	+ .005/- .000	5.308	.678	.543	.475	.186
80	5.000	5.625-12 UN-28	5.765	5.613	5.378	5.500	+ .005/- .000	5.807	.678	.543	.475	.211