


REV.
B

SAE AS4679

FEDERAL SUPPLY CLASS
4730

RATIONALE

AS4679B HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

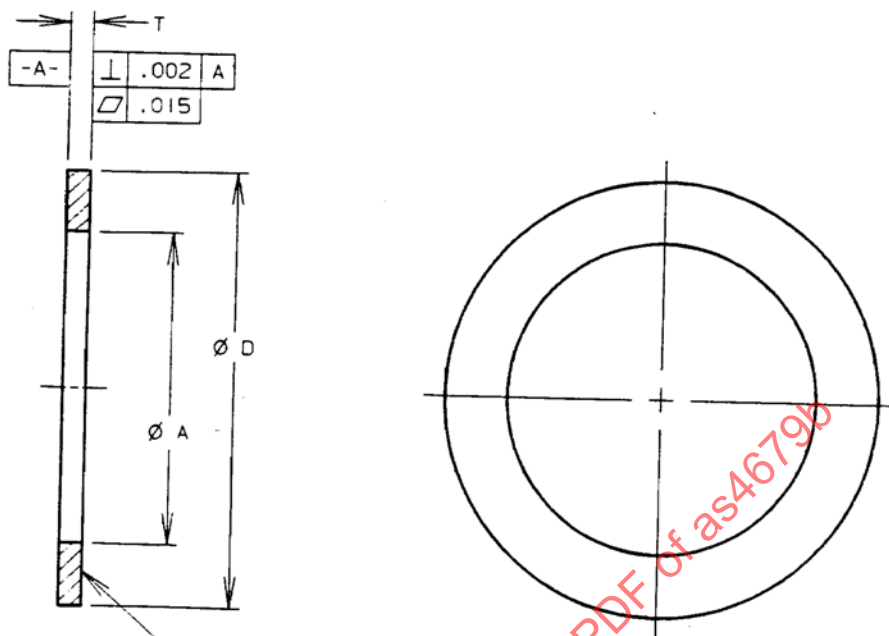

LOCATION OF IDENTIFICATION /3/


FIGURE 1 - WASHER

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS4679 /5/ /12/ SIZE AND THICKNESS CODE	(NOMINAL TUBE SIZE)	A	D + .020/- .005	T		LB/EA MAX	
				ALUMINUM	STEEL, CRES	ALUM	STEEL, CRES
20-16	20	1.578	2.313	.013-.019	.016	.0040	.0111
20-32	20	1.578	2.313	.028-.036	.032	.0080	.0222
20-90	20	1.578	2.313	.083-.097	.090	.0225	.0623
24-16	24	1.828	2.562	.013-.019	.016	.0045	.0125
24-32	24	1.828	2.562	.028-.036	.032	.0090	.0249
24-90	24	1.828	2.562	.083-.097	.090	.0253	.0702
28-16	28	2.140	2.875	.013-.019	.016	.0051	.0143
28-32	28	2.140	2.875	.028-.036	.032	.0103	.0285
28-90	28	2.140	2.875	.083-.097	.090	.0289	.0802

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS4679B>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: NONE /4/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

WASHER, FLAT, SHORT FLARELESS

SAE AS4679
SHEET 1 OF 2

REV.
B