


RATIONALE

FEDERAL SUPPLY CLASS
5331


THIS STANDARD ESTABLISHES THE DIMENSIONAL AND VISUAL QUALITY REQUIREMENTS AND PACKAGING AND LABELING REQUIREMENTS FOR O-RINGS MOLDED FROM AMS7268 RUBBER. IT SHALL BE USED FOR PROCUREMENT PURPOSES.

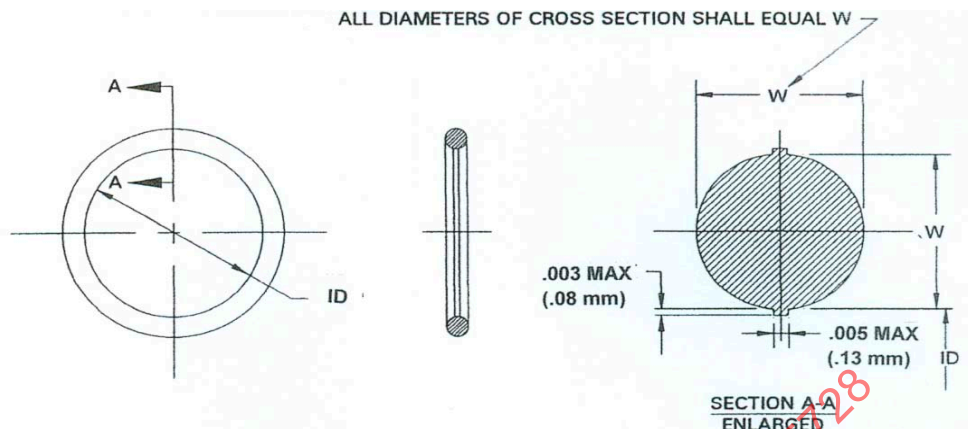

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-001	.025	.033	0.64	0.84	.037	.043	0.94	1.09	.002	0.001
AS5728-002	.038	.046	0.97	1.17	.047	.053	1.19	1.35	.003	0.002
AS5728-003	.052	.060	1.32	1.52	.057	.063	1.45	1.60	.005	0.002
AS5728-004	.065	.075	1.65	1.90	.067	.073	1.70	1.85	.009	0.004
AS5728-005	.096	.106	2.44	2.69	.067	.073	1.70	1.85	.011	0.005
AS5728-006	.109	.119	2.77	3.02	.067	.073	1.70	1.85	.011	0.005
AS5728-007	.140	.150	3.56	3.81	.067	.073	1.70	1.85	.013	0.006
AS5728-008	.171	.181	4.34	4.60	.067	.073	1.70	1.85	.015	0.006
AS5728-009	.203	.213	5.16	5.41	.067	.073	1.70	1.85	.017	0.008
AS5728-010	.234	.244	5.94	6.20	.067	.073	1.70	1.85	.019	0.009
AS5728-011	.296	.306	7.52	7.77	.067	.073	1.70	1.85	.023	0.011
AS5728-012	.359	.369	9.12	9.37	.067	.073	1.70	1.85	.027	0.012
AS5728-013	.421	.431	10.69	10.95	.067	.073	1.70	1.85	.031	0.014
AS5728-014	.484	.494	12.29	12.55	.067	.073	1.70	1.85	.035	0.015
AS5728-015	.544	.558	13.82	14.17	.067	.073	1.70	1.85	.038	0.017
AS5728-016	.605	.623	15.37	15.82	.067	.073	1.70	1.85	.042	0.019
AS5728-017	.667	.685	16.94	17.40	.067	.073	1.70	1.85	.046	0.021
AS5728-018	.730	.748	18.54	19.00	.067	.073	1.70	1.85	.050	0.023
AS5728-019	.792	.810	20.12	20.57	.067	.073	1.70	1.85	.054	0.024
AS5728-020	.855	.873	21.72	22.17	.067	.073	1.70	1.85	.058	0.026
AS5728-021	.917	.935	23.29	23.75	.067	.073	1.70	1.85	.062	0.028
AS5728-022	.979	.999	24.87	25.37	.067	.073	1.70	1.85	.066	0.030
AS5728-023	1.041	1.061	26.44	26.95	.067	.073	1.70	1.85	.069	0.032
AS5728-024	1.104	1.124	28.04	28.55	.067	.073	1.70	1.85	.073	0.033
AS5728-025	1.165	1.187	29.59	30.15	.067	.073	1.70	1.85	.077	0.035

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS5728>

THIRD ANGLE PROJECTION



CUSTODIAN: A-6/A-6C

PROCUREMENT SPECIFICATION: AS5728

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD
PACKING, PREFORMED, O-RING MOLDED FROM
AMS7268 MATERIAL

SAE AS5728
SHEET 1 OF 9

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-026	1.228	1.250	31.19	31.75	.067	.073	1.70	1.85	.081	0.036
AS5728-027	1.290	1.312	32.77	33.32	.067	.073	1.70	1.85	.084	0.038
AS5728-028	1.351	1.377	34.32	34.98	.067	.073	1.70	1.85	.088	0.041
AS5728-029	1.476	1.502	37.49	38.15	.067	.073	1.70	1.85	.097	0.044
AS5728-030	1.601	1.627	40.67	41.33	.067	.073	1.70	1.85	.104	0.047
AS5728-031	1.724	1.754	43.79	44.55	.067	.073	1.70	1.85	.112	0.051
AS5728-032	1.849	1.879	46.96	47.73	.067	.073	1.70	1.85	.119	0.054
AS5728-033	1.971	2.007	50.06	50.98	.067	.073	1.70	1.85	.127	0.058
AS5728-034	2.096	2.132	53.24	54.15	.067	.073	1.70	1.85	.135	0.061
AS5728-035	2.221	2.257	56.41	57.33	.067	.073	1.70	1.85	.143	0.065
AS5728-036	2.346	2.382	59.59	60.50	.067	.073	1.70	1.85	.150	0.068
AS5728-037	2.471	2.507	62.76	63.68	.067	.073	1.70	1.85	.158	0.071
AS5728-038	2.594	2.634	65.9	66.9	.067	.073	1.70	1.85	.165	0.075
AS5728-039	2.719	2.759	69.1	70.1	.067	.073	1.70	1.85	.174	0.079
AS5728-040	2.844	2.884	72.2	73.3	.067	.073	1.70	1.85	.181	0.082
AS5728-041	2.965	3.013	75.3	76.5	.067	.073	1.70	1.85	.189	0.086
AS5728-042	3.215	3.263	81.7	82.9	.067	.073	1.70	1.85	.204	0.092
AS5728-043	3.465	3.513	88.0	89.2	.067	.073	1.70	1.85	.220	0.100
AS5728-044	3.712	3.766	94.3	95.7	.067	.073	1.70	1.85	.235	0.107
AS5728-045	3.962	4.016	100.6	102.0	.067	.073	1.70	1.85	.251	0.114
AS5728-046	4.209	4.269	106.9	108.4	.067	.073	1.70	1.85	.266	0.121
AS5728-047	4.459	4.519	113.3	114.8	.067	.073	1.70	1.85	.281	0.128
AS5728-048	4.709	4.769	119.6	121.1	.067	.073	1.70	1.85	.297	0.135
AS5728-049	4.952	5.026	125.8	127.7	.067	.073	1.70	1.85	.312	0.142
AS5728-050	5.202	5.276	132.1	134.0	.067	.073	1.70	1.85	.328	0.148
AS5728-102	.044	.054	1.12	1.37	.100	.106	2.54	2.69	.020	0.009
AS5728-103	.076	.086	1.93	2.18	.100	.106	2.54	2.69	.024	0.011
AS5728-104	.107	.117	2.72	2.97	.100	.106	2.54	2.69	.028	0.013
AS5728-105	.138	.148	3.51	3.76	.100	.106	2.54	2.69	.033	0.015
AS5728-106	.169	.179	4.29	4.55	.100	.106	2.54	2.69	.037	0.017
AS5728-107	.201	.211	5.11	5.36	.100	.106	2.54	2.69	.041	0.019
AS5728-108	.232	.242	5.89	6.15	.100	.106	2.54	2.69	.045	0.020
AS5728-109	.294	.304	7.47	7.72	.100	.106	2.54	2.69	.054	0.024
AS5728-110	.357	.367	9.07	9.32	.100	.106	2.54	2.69	.062	0.028
AS5728-111	.419	.429	10.64	10.90	.100	.106	2.54	2.69	.071	0.032
AS5728-112	.482	.492	12.24	12.50	.100	.106	2.54	2.69	.079	0.036
AS5728-113	.542	.556	13.77	14.12	.100	.106	2.54	2.69	.088	0.040
AS5728-114	.603	.621	15.32	15.77	.100	.106	2.54	2.69	.096	0.043
AS5728-115	.665	.683	16.89	17.35	.100	.106	2.54	2.69	.104	0.047
AS5728-116	.728	.746	18.49	18.95	.100	.106	2.54	2.69	.113	0.051
AS5728-117	.789	.809	20.04	20.55	.100	.106	2.54	2.69	.121	0.054
AS5728-118	.852	.872	21.64	22.15	.100	.106	2.54	2.69	.129	0.058
AS5728-119	.914	.934	23.22	23.72	.100	.106	2.54	2.69	.137	0.062
AS5728-120	.977	.997	24.82	25.32	.100	.106	2.54	2.69	.146	0.067
AS5728-121	1.039	1.059	26.39	26.90	.100	.106	2.54	2.69	.154	0.070
AS5728-122	1.102	1.122	27.99	28.50	.100	.106	2.54	2.69	.162	0.074
AS5728-123	1.162	1.186	29.51	30.12	.100	.106	2.54	2.69	.171	0.078
AS5728-124	1.225	1.249	31.12	31.72	.100	.106	2.54	2.69	.179	0.081
AS5728-125	1.287	1.311	32.69	33.30	.100	.106	2.54	2.69	.187	0.085

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-126	1.350	1.374	34.29	34.90	.100	.106	2.54	2.69	.196	0.089
AS5728-127	1.412	1.436	35.86	36.47	.100	.106	2.54	2.69	.204	0.092
AS5728-128	1.475	1.499	37.46	38.07	.100	.106	2.54	2.69	.212	0.097
AS5728-129	1.534	1.564	38.96	39.73	.100	.106	2.54	2.69	.221	0.101
AS5728-130	1.597	1.627	40.56	41.33	.100	.106	2.54	2.69	.230	0.104
AS5728-131	1.659	1.689	42.14	42.90	.100	.106	2.54	2.69	.238	0.108
AS5728-132	1.722	1.752	43.74	44.50	.100	.106	2.54	2.69	.246	0.112
AS5728-133	1.784	1.814	45.31	46.08	.100	.106	2.54	2.69	.255	0.115
AS5728-134	1.847	1.877	46.91	47.68	.100	.106	2.54	2.69	.263	0.119
AS5728-135	1.908	1.942	48.46	49.33	.100	.106	2.54	2.69	.271	0.123
AS5728-136	1.970	2.004	50.04	50.90	.100	.106	2.54	2.69	.280	0.127
AS5728-137	2.033	2.067	51.64	52.50	.100	.106	2.54	2.69	.288	0.131
AS5728-138	2.095	2.129	53.21	54.08	.100	.106	2.54	2.69	.296	0.135
AS5728-139	2.158	2.192	54.81	55.68	.100	.106	2.54	2.69	.305	0.138
AS5728-140	2.220	2.254	56.39	57.25	.100	.106	2.54	2.69	.313	0.142
AS5728-141	2.280	2.320	57.9	58.9	.100	.106	2.54	2.69	.321	0.146
AS5728-142	2.342	2.382	59.5	60.5	.100	.106	2.54	2.69	.330	0.149
AS5728-143	2.405	2.445	61.1	62.1	.100	.106	2.54	2.69	.338	0.153
AS5728-144	2.467	2.507	62.7	63.7	.100	.106	2.54	2.69	.346	0.157
AS5728-145	2.530	2.570	64.3	65.3	.100	.106	2.54	2.69	.355	0.161
AS5728-146	2.592	2.632	65.8	66.9	.100	.106	2.54	2.69	.363	0.165
AS5728-147	2.653	2.697	67.4	68.5	.100	.106	2.54	2.69	.371	0.169
AS5728-148	2.715	2.759	69.0	70.1	.100	.106	2.54	2.69	.380	0.172
AS5728-149	2.778	2.822	70.6	71.7	.100	.106	2.54	2.69	.388	0.176
AS5728-150	2.840	2.884	72.1	73.3	.100	.106	2.54	2.69	.397	0.180
AS5728-151	2.963	3.011	75.3	76.5	.100	.106	2.54	2.69	.414	0.187
AS5728-152	3.213	3.261	81.6	82.8	.100	.106	2.54	2.69	.447	0.203
AS5728-153	3.463	3.511	88.0	89.2	.100	.106	2.54	2.69	.480	0.218
AS5728-154	3.709	3.765	94.2	95.6	.100	.106	2.54	2.69	.513	0.233
AS5728-155	3.959	4.015	100.6	102.0	.100	.106	2.54	2.69	.547	0.248
AS5728-156	4.207	4.267	106.9	108.4	.100	.106	2.54	2.69	.581	0.264
AS5728-157	4.457	4.517	113.2	114.7	.100	.106	2.54	2.69	.614	0.278
AS5728-158	4.707	4.767	119.6	121.1	.100	.106	2.54	2.69	.647	0.294
AS5728-159	4.952	5.022	125.8	127.6	.100	.106	2.54	2.69	.680	0.309
AS5728-160	5.202	5.272	132.1	133.9	.100	.106	2.54	2.69	.714	0.324
AS5728-161	5.452	5.522	138.5	140.3	.100	.106	2.54	2.69	.748	0.339
AS5728-162	5.702	5.772	144.8	146.6	.100	.106	2.54	2.69	.781	0.354
AS5728-163	5.952	6.022	151.2	153.0	.100	.106	2.54	2.69	.814	0.370
AS5728-164	6.197	6.277	157.4	159.4	.100	.106	2.54	2.69	.848	0.384
AS5728-165	6.447	6.527	163.8	165.8	.100	.106	2.54	2.69	.882	0.400
AS5728-166	6.697	6.777	170.1	172.1	.100	.106	2.54	2.69	.915	0.415
AS5728-167	6.947	7.027	176.5	178.5	.100	.106	2.54	2.69	.948	0.430
AS5728-168	7.192	7.282	182.7	185.0	.100	.106	2.54	2.69	.981	0.445
AS5728-169	7.442	7.532	189.0	191.3	.100	.106	2.54	2.69	1.015	0.461
AS5728-170	7.692	7.782	195.4	197.7	.100	.106	2.54	2.69	1.049	0.475
AS5728-171	7.942	8.032	201.7	204.0	.100	.106	2.54	2.69	1.082	0.491
AS5728-172	8.187	8.287	207.9	210.5	.100	.106	2.54	2.69	1.115	0.506
AS5728-173	8.437	8.537	214.3	216.8	.100	.106	2.54	2.69	1.149	0.521
AS5728-174	8.687	8.787	220.6	223.2	.100	.106	2.54	2.69	1.182	0.536
AS5728-175	8.937	9.037	227.0	229.5	.100	.106	2.54	2.69	1.216	0.551

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-176	9.182	9.292	233.2	236.0	.100	.106	2.54	2.69	1.249	0.567
AS5728-177	9.432	9.542	239.6	242.4	.100	.106	2.54	2.69	1.283	0.581
AS5728-178	9.682	9.792	245.9	248.7	.100	.106	2.54	2.69	1.316	0.597
AS5728-201	.166	.176	4.22	4.47	.135	.143	3.43	3.63	.075	0.034
AS5728-202	.229	.239	5.82	6.07	.135	.143	3.43	3.63	.091	0.041
AS5728-203	.291	.301	7.39	7.65	.135	.143	3.43	3.63	.106	0.048
AS5728-204	.354	.364	8.99	9.25	.135	.143	3.43	3.63	.122	0.055
AS5728-205	.416	.426	10.57	10.82	.135	.143	3.43	3.63	.136	0.062
AS5728-206	.479	.489	12.17	12.42	.135	.143	3.43	3.63	.152	0.062
AS5728-207	.539	.553	13.69	14.05	.135	.143	3.43	3.63	.167	0.075
AS5728-208	.600	.618	15.24	15.70	.135	.143	3.43	3.63	.182	0.083
AS5728-209	.662	.680	16.81	17.27	.135	.143	3.43	3.63	.197	0.089
AS5728-210	.724	.744	18.39	18.90	.135	.143	3.43	3.63	.212	0.097
AS5728-211	.786	.806	19.96	20.47	.135	.143	3.43	3.63	.228	0.103
AS5728-212	.849	.869	21.56	22.07	.135	.143	3.43	3.63	.243	0.110
AS5728-213	.911	.931	23.14	23.65	.135	.143	3.43	3.63	.258	0.117
AS5728-214	.974	.994	24.74	25.25	.135	.143	3.43	3.63	.273	0.124
AS5728-215	1.036	1.056	26.31	26.82	.135	.143	3.43	3.63	.289	0.131
AS5728-216	1.097	1.121	27.86	28.47	.135	.143	3.43	3.63	.304	0.138
AS5728-217	1.159	1.183	29.44	30.05	.135	.143	3.43	3.63	.319	0.144
AS5728-218	1.222	1.246	31.04	31.65	.135	.143	3.43	3.63	.334	0.152
AS5728-219	1.284	1.308	32.61	33.22	.135	.143	3.43	3.63	.350	0.158
AS5728-220	1.347	1.371	34.21	34.82	.135	.143	3.43	3.63	.365	0.165
AS5728-221	1.409	1.433	35.79	36.40	.135	.143	3.43	3.63	.380	0.173
AS5728-222	1.469	1.499	37.31	38.07	.135	.143	3.43	3.63	.395	0.179
AS5728-223	1.594	1.624	40.49	41.25	.135	.143	3.43	3.63	.426	0.193
AS5728-224	1.719	1.749	43.66	44.42	.135	.143	3.43	3.63	.457	0.207
AS5728-225	1.841	1.877	46.76	47.68	.135	.143	3.43	3.63	.487	0.221
AS5728-226	1.966	2.002	49.94	50.85	.135	.143	3.43	3.63	.517	0.234
AS5728-227	2.091	2.127	53.11	54.03	.135	.143	3.43	3.63	.547	0.248
AS5728-228	2.214	2.254	56.2	57.3	.135	.143	3.43	3.63	.578	0.262
AS5728-229	2.339	2.379	59.4	60.4	.135	.143	3.43	3.63	.608	0.276
AS5728-230	2.464	2.504	62.6	63.6	.135	.143	3.43	3.63	.639	0.290
AS5728-231	2.589	2.629	65.8	66.8	.135	.143	3.43	3.63	.669	0.303
AS5728-232	2.710	2.758	68.8	70.1	.135	.143	3.43	3.63	.700	0.317
AS5728-233	2.835	2.883	72.0	73.2	.135	.143	3.43	3.63	.730	0.331
AS5728-234	2.960	3.008	75.2	76.4	.135	.143	3.43	3.63	.761	0.345
AS5728-235	3.085	3.133	78.4	79.6	.135	.143	3.43	3.63	.792	0.358
AS5728-236	3.210	3.258	81.5	82.8	.135	.143	3.43	3.63	.822	0.373
AS5728-237	3.335	3.383	84.7	85.9	.135	.143	3.43	3.63	.852	0.387
AS5728-238	3.460	3.508	87.9	89.1	.135	.143	3.43	3.63	.882	0.401
AS5728-239	3.581	3.637	91.0	92.4	.135	.143	3.43	3.63	.913	0.414
AS5728-240	3.706	3.762	94.1	95.6	.135	.143	3.43	3.63	.943	0.428
AS5728-241	3.831	3.887	97.3	98.7	.135	.143	3.43	3.63	.974	0.442
AS5728-242	3.956	4.012	100.5	101.9	.135	.143	3.43	3.63	1.004	0.456
AS5728-243	4.081	4.137	103.7	105.1	.135	.143	3.43	3.63	1.035	0.470
AS5728-244	4.204	4.264	106.8	108.3	.135	.143	3.43	3.63	1.065	0.483
AS5728-245	4.329	4.389	110.0	111.5	.135	.143	3.43	3.63	1.096	0.497

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-246	4.454	4.514	113.1	114.7	.135	.143	3.43	3.63	1.126	0.511
AS5728-247	4.579	4.639	116.3	117.8	.135	.143	3.43	3.63	1.156	0.525
AS5728-248	4.704	4.764	119.5	121.0	.135	.143	3.43	3.63	1.187	0.539
AS5728-249	4.824	4.894	122.5	124.3	.135	.143	3.43	3.63	1.217	0.552
AS5728-250	4.949	5.019	125.7	127.5	.135	.143	3.43	3.63	1.248	0.566
AS5728-251	5.074	5.144	128.9	130.7	.135	.143	3.43	3.63	1.278	0.580
AS5728-252	5.199	5.269	132.1	133.8	.135	.143	3.43	3.63	1.309	0.594
AS5728-253	5.324	5.394	135.2	137.0	.135	.143	3.43	3.63	1.339	0.607
AS5728-254	5.449	5.519	138.4	140.2	.135	.143	3.43	3.63	1.370	0.621
AS5728-255	5.574	5.644	141.6	143.4	.135	.143	3.43	3.63	1.400	0.635
AS5728-256	5.699	5.769	144.8	146.5	.135	.143	3.43	3.63	1.431	0.649
AS5728-257	5.824	5.894	147.9	149.7	.135	.143	3.43	3.63	1.461	0.663
AS5728-258	5.949	6.019	151.1	152.9	.135	.143	3.43	3.63	1.491	0.676
AS5728-259	6.194	6.274	157.3	159.4	.135	.143	3.43	3.63	1.552	0.704
AS5728-260	6.444	6.524	163.7	165.7	.135	.143	3.43	3.63	1.613	0.732
AS5728-261	6.694	6.774	170.0	172.1	.135	.143	3.43	3.63	1.674	0.759
AS5728-262	6.944	7.024	176.4	178.4	.135	.143	3.43	3.63	1.735	0.787
AS5728-263	7.189	7.279	182.6	184.9	.135	.143	3.43	3.63	1.796	0.814
AS5728-264	7.439	7.529	189.0	191.2	.135	.143	3.43	3.63	1.856	0.843
AS5728-265	7.689	7.779	195.3	197.6	.135	.143	3.43	3.63	1.918	0.870
AS5728-266	7.939	8.029	201.7	203.9	.135	.143	3.43	3.63	1.979	0.898
AS5728-267	8.184	8.284	207.9	210.4	.135	.143	3.43	3.63	2.040	0.925
AS5728-268	8.434	8.534	214.2	216.8	.135	.143	3.43	3.63	2.100	0.953
AS5728-269	8.684	8.784	220.6	223.1	.135	.143	3.43	3.63	2.161	0.980
AS5728-270	8.934	9.034	226.9	229.5	.135	.143	3.43	3.63	2.222	1.008
AS5728-271	9.179	9.289	233.1	235.9	.135	.143	3.43	3.63	2.283	1.036
AS5728-272	9.429	9.539	239.5	242.3	.135	.143	3.43	3.63	2.344	1.063
AS5728-273	9.679	9.789	245.8	248.6	.135	.143	3.43	3.63	2.405	1.091
AS5728-274	9.929	10.039	252.2	255.0	.135	.143	3.43	3.63	2.465	1.118
AS5728-275	10.429	10.539	264.9	267.7	.135	.143	3.43	3.63	2.587	1.174
AS5728-276	10.919	11.049	277.3	280.6	.135	.143	3.43	3.63	2.710	1.229
AS5728-277	11.419	11.549	290.0	293.3	.135	.143	3.43	3.63	2.831	1.284
AS5728-278	11.919	12.049	302.7	306.0	.135	.143	3.43	3.63	2.953	1.340
AS5728-279	12.919	13.049	328.1	331.4	.135	.143	3.43	3.63	3.196	1.450
AS5728-280	13.919	14.049	353.5	356.8	.135	.143	3.43	3.63	3.440	1.560
AS5728-281	14.919	15.049	378.9	382.2	.135	.143	3.43	3.63	3.684	1.671
AS5728-282	15.880	16.030	403.4	407.2	.135	.143	3.43	3.63	3.920	1.779
AS5728-283	16.875	17.035	428.6	432.7	.135	.143	3.43	3.63	4.164	1.889
AS5728-284	17.870	18.040	453.9	458.2	.135	.143	3.43	3.63	4.407	1.999
AS5728-309	.407	.417	10.34	10.59	.205	.215	5.21	5.46	.345	0.157
AS5728-310	.470	.480	11.94	12.19	.205	.215	5.21	5.46	.381	0.173
AS5728-311	.530	.544	13.46	13.82	.205	.215	5.21	5.46	.415	0.188
AS5728-312	.591	.609	15.01	15.47	.205	.215	5.21	5.46	.450	0.204
AS5728-313	.653	.671	16.59	17.04	.205	.215	5.21	5.46	.485	0.220
AS5728-314	.715	.735	18.16	18.67	.205	.215	5.21	5.46	.520	0.236
AS5728-315	.777	.797	19.74	20.24	.205	.215	5.21	5.46	.554	0.251
AS5728-316	.840	.860	21.34	21.84	.205	.215	5.21	5.46	.590	0.268
AS5728-317	.902	.922	22.91	23.42	.205	.215	5.21	5.46	.624	0.283
AS5728-318	.965	.985	24.51	25.02	.205	.215	5.21	5.46	.659	0.298
AS5728-319	1.027	1.047	26.09	26.59	.205	.215	5.21	5.46	.693	0.315
AS5728-320	1.088	1.112	27.64	28.24	.205	.215	5.21	5.46	.728	0.330

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-321	1.150	1.174	29.21	29.82	.205	.215	5.21	5.46	.763	0.346
AS5728-322	1.213	1.237	30.81	31.42	.205	.215	5.21	5.46	.798	0.362
AS5728-323	1.275	1.299	32.38	32.99	.205	.215	5.21	5.46	.832	0.377
AS5728-324	1.338	1.362	33.99	34.59	.205	.215	5.21	5.46	.867	0.393
AS5728-325	1.460	1.490	37.08	37.85	.205	.215	5.21	5.46	.937	0.425
AS5728-326	1.585	1.615	40.26	41.02	.205	.215	5.21	5.46	1.006	0.457
AS5728-327	1.710	1.740	43.43	44.20	.205	.215	5.21	5.46	1.075	0.488
AS5728-328	1.835	1.865	46.61	47.37	.205	.215	5.21	5.46	1.145	0.520
AS5728-329	1.957	1.993	49.71	50.62	.205	.215	5.21	5.46	1.215	0.551
AS5728-330	2.082	2.118	52.88	53.80	.205	.215	5.21	5.46	1.285	0.582
AS5728-331	2.207	2.243	56.06	56.97	.205	.215	5.21	5.46	1.354	0.614
AS5728-332	2.332	2.368	59.23	60.15	.205	.215	5.21	5.46	1.423	0.646
AS5728-333	2.455	2.495	62.4	63.4	.205	.215	5.21	5.46	1.493	0.677
AS5728-334	2.580	2.620	65.5	66.5	.205	.215	5.21	5.46	1.562	0.709
AS5728-335	2.705	2.745	68.7	69.7	.205	.215	5.21	5.46	1.632	0.740
AS5728-336	2.830	2.870	71.9	72.9	.205	.215	5.21	5.46	1.701	0.772
AS5728-337	2.951	2.999	75.0	76.2	.205	.215	5.21	5.46	1.770	0.803
AS5728-338	3.076	3.124	78.1	79.3	.205	.215	5.21	5.46	1.840	0.835
AS5728-339	3.201	3.249	81.3	82.5	.205	.215	5.21	5.46	1.910	0.866
AS5728-340	3.326	3.374	84.5	85.7	.205	.215	5.21	5.46	1.979	0.898
AS5728-341	3.451	3.499	87.7	88.9	.205	.215	5.21	5.46	2.049	0.929
AS5728-342	3.572	3.628	90.7	92.2	.205	.215	5.21	5.46	2.118	0.961
AS5728-343	3.697	3.753	93.9	95.3	.205	.215	5.21	5.46	2.188	0.993
AS5728-344	3.822	3.878	97.1	98.5	.205	.215	5.21	5.46	2.257	1.023
AS5728-345	3.947	4.003	100.3	101.7	.205	.215	5.21	5.46	2.327	1.055
AS5728-346	4.072	4.128	103.4	104.9	.205	.215	5.21	5.46	2.397	1.087
AS5728-347	4.195	4.255	106.6	108.1	.205	.215	5.21	5.46	2.465	1.118
AS5728-348	4.320	4.380	109.7	111.3	.205	.215	5.21	5.46	2.535	1.150
AS5728-349	4.445	4.505	112.9	114.4	.205	.215	5.21	5.46	2.605	1.182
AS5728-350	4.570	4.630	116.1	117.6	.205	.215	5.21	5.46	2.674	1.213
AS5728-351	4.695	4.755	119.3	120.8	.205	.215	5.21	5.46	2.744	1.245
AS5728-352	4.820	4.880	122.4	124.0	.205	.215	5.21	5.46	2.813	1.276
AS5728-353	4.938	5.012	125.4	127.3	.205	.215	5.21	5.46	2.882	1.307
AS5728-354	5.063	5.137	128.6	130.5	.205	.215	5.21	5.46	2.952	1.339
AS5728-355	5.188	5.262	131.8	133.7	.205	.215	5.21	5.46	3.022	1.371
AS5728-356	5.313	5.387	135.0	136.8	.205	.215	5.21	5.46	3.091	1.402
AS5728-357	5.438	5.512	138.1	140.0	.205	.215	5.21	5.46	3.160	1.434
AS5728-358	5.563	5.637	141.3	143.2	.205	.215	5.21	5.46	3.230	1.465
AS5728-359	5.688	5.762	144.5	146.4	.205	.215	5.21	5.46	3.300	1.496
AS5728-360	5.813	5.887	147.7	149.5	.205	.215	5.21	5.46	3.369	1.528
AS5728-361	5.938	6.012	150.8	152.7	.205	.215	5.21	5.46	3.439	1.560
AS5728-362	6.185	6.265	157.1	159.1	.205	.215	5.21	5.46	3.577	1.623
AS5728-363	6.435	6.515	163.4	165.5	.205	.215	5.21	5.46	3.717	1.686
AS5728-364	6.685	6.765	169.8	171.8	.205	.215	5.21	5.46	3.855	1.749
AS5728-365	6.935	7.015	176.1	178.2	.205	.215	5.21	5.46	3.994	1.812
AS5728-366	7.180	7.270	182.4	184.7	.205	.215	5.21	5.46	4.134	1.875
AS5728-367	7.430	7.520	188.7	191.0	.205	.215	5.21	5.46	4.272	1.938
AS5728-368	7.680	7.770	195.1	197.4	.205	.215	5.21	5.46	4.412	2.001
AS5728-369	7.930	8.020	201.4	203.7	.205	.215	5.21	5.46	4.551	2.064
AS5728-370	8.175	8.275	207.6	210.2	.205	.215	5.21	5.46	4.689	2.127

PART NUMBER	ID (IN)		ID (MM)		W DIA (IN)		W DIA (MM)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	KG/100
AS5728-371	8.425	8.525	214.0	216.5	.205	.215	5.21	5.46	4.829	2.191
AS5728-372	8.675	8.775	220.3	222.9	.205	.215	5.21	5.46	4.967	2.253
AS5728-373	8.925	9.025	226.7	229.2	.205	.215	5.21	5.46	5.107	2.316
AS5728-374	9.170	9.280	232.9	235.7	.205	.215	5.21	5.46	5.246	2.379
AS5728-375	9.420	9.530	239.3	242.1	.205	.215	5.21	5.46	5.384	2.443
AS5728-376	9.670	9.780	245.6	248.4	.205	.215	5.21	5.46	5.524	2.505
AS5728-377	9.920	10.030	252.0	254.8	.205	.215	5.21	5.46	5.662	2.568
AS5728-378	10.415	10.535	264.5	267.6	.205	.215	5.21	5.46	5.941	2.695
AS5728-379	10.915	11.035	277.2	280.3	.205	.215	5.21	5.46	6.219	2.821
AS5728-380	11.410	11.540	289.8	293.1	.205	.215	5.21	5.46	6.496	2.946
AS5728-381	11.910	12.040	302.5	305.8	.205	.215	5.21	5.46	6.774	3.073
AS5728-382	12.910	13.040	327.9	331.2	.205	.215	5.21	5.46	7.331	3.325
AS5728-383	13.905	14.045	353.2	356.7	.205	.215	5.21	5.46	7.886	3.577
AS5728-384	14.905	15.045	378.6	382.1	.205	.215	5.21	5.46	8.443	3.830
AS5728-385	15.880	16.030	403.4	407.2	.205	.215	5.21	5.46	8.987	4.077
AS5728-386	16.875	17.035	428.6	432.7	.205	.215	5.21	5.46	9.543	4.328
AS5728-387	17.870	18.040	453.9	458.2	.205	.215	5.21	5.46	10.099	4.581
AS5728-388	18.865	19.045	479.2	483.7	.205	.215	5.21	5.46	10.655	4.833
AS5728-389	19.860	20.050	504.4	509.3	.205	.215	5.21	5.46	11.211	5.085
AS5728-390	20.860	21.050	529.8	534.7	.205	.215	5.21	5.46	11.767	5.337
AS5728-391	21.855	22.055	555.1	560.2	.205	.215	5.21	5.46	12.323	5.589
AS5728-392	22.835	23.045	480.0	585.3	.205	.215	5.21	5.46	12.871	5.838
AS5728-393	23.830	24.050	605.3	610.9	.205	.215	5.21	5.46	13.426	6.090
AS5728-394	24.825	25.055	630.6	636.4	.205	.215	5.21	5.46	13.982	6.342
AS5728-395	25.820	26.060	655.8	661.9	.205	.215	5.21	5.46	14.538	6.594
AS5728-425	4.442	4.508	112.8	114.5	.269	.281	6.83	7.14	4.529	2.054
AS5728-426	4.567	4.633	116.0	117.7	.269	.281	6.83	7.14	4.648	2.109
AS5728-427	4.692	4.758	119.2	120.9	.269	.281	6.83	7.14	4.767	2.162
AS5728-428	4.817	4.883	122.4	124.0	.269	.281	6.83	7.14	4.886	2.216
AS5728-429	4.938	5.012	125.4	127.3	.269	.281	6.83	7.14	5.005	2.270
AS5728-430	5.063	5.137	128.6	130.5	.269	.281	6.83	7.14	5.125	2.324
AS5728-431	5.188	5.262	131.8	133.7	.269	.281	6.83	7.14	5.244	3.279
AS5728-432	5.313	5.387	135.0	136.8	.269	.281	6.83	7.14	5.363	2.432
AS5728-433	5.438	5.512	138.1	140.0	.269	.281	6.83	7.14	5.482	2.487
AS5728-434	5.563	5.637	141.3	143.2	.269	.281	6.83	7.14	5.601	2.541
AS5728-435	5.688	5.762	144.5	146.4	.269	.281	6.83	7.14	5.720	2.594
AS5728-436	5.813	5.887	147.7	149.5	.269	.281	6.83	7.14	5.839	2.649
AS5728-437	5.938	6.012	150.8	152.7	.269	.281	6.83	7.14	5.958	2.703
AS5728-438	6.185	6.265	157.1	159.1	.269	.281	6.83	7.14	6.197	2.811
AS5728-439	6.435	6.515	163.4	165.5	.269	.281	6.83	7.14	6.435	2.919
AS5728-440	6.685	6.765	169.8	171.8	.269	.281	6.83	7.14	6.674	3.027
AS5728-441	6.935	7.015	176.1	178.2	.269	.281	6.83	7.14	6.912	3.135
AS5728-442	7.180	7.270	182.4	184.7	.269	.281	6.83	7.14	7.151	3.243
AS5728-443	7.430	7.520	188.7	191.0	.269	.281	6.83	7.14	7.389	3.352
AS5728-444	7.680	7.770	195.1	197.4	.269	.281	6.83	7.14	7.627	3.460
AS5728-445	7.930	8.020	201.4	203.7	.269	.281	6.83	7.14	7.865	3.568