




SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS9201	REV. A		FEDERAL SUPPLY CLASS 5310					
		THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9201B, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT. SAENORM.COM : Click to view the full PDF of as9201a <table border="1" style="border-collapse: collapse;"> <tr> <td style="padding: 2px;">THIRD ANGLE PROJECTION</td> </tr> <tr> <td style="text-align: center; padding: 10px;">  </td> </tr> </table>		THIRD ANGLE PROJECTION				
THIRD ANGLE PROJECTION								
								
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS								
 An SAE International Group	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 5px;">AEROSPACE STANDARD</td> </tr> <tr> <td style="padding: 5px;">(R) NUT, PLAIN, HEXAGON, BOSS CONNECTION, SILVER PLATED, CRES-UNS S34700</td> </tr> </table>		AEROSPACE STANDARD	(R) NUT, PLAIN, HEXAGON, BOSS CONNECTION, SILVER PLATED, CRES-UNS S34700	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 5px;"> AS9201 SHEET 1 OF 3 </td> </tr> </table>	AS9201 SHEET 1 OF 3	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center; padding: 5px;"> REV. A </td> </tr> </table>	REV. A
AEROSPACE STANDARD								
(R) NUT, PLAIN, HEXAGON, BOSS CONNECTION, SILVER PLATED, CRES-UNS S34700								
AS9201 SHEET 1 OF 3								
REV. A								

REV.
A

AS9201

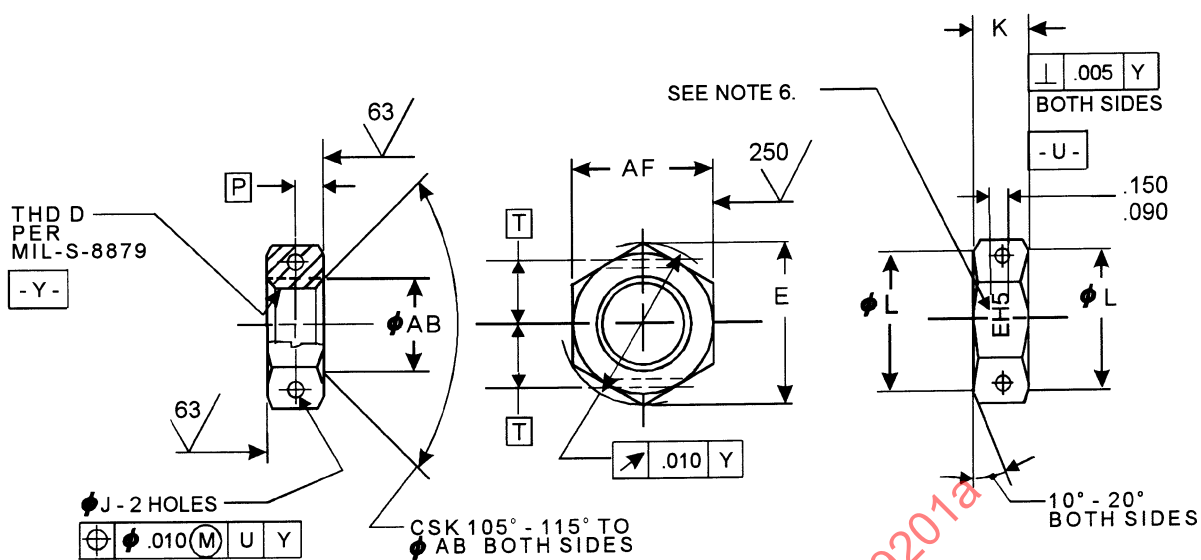


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	NOM TUBE OD	D - NOMINAL THREAD	AF	E MIN	AB
MS9201-02	.125	.3125-24UNJF-3B	0.553 - 0.564	0.623	0.312 - 0.332
MS9201-03	.188	.3750-24UNJF-3B	0.616 - 0.627	0.694	0.375 - 0.395
MS9201-04	.250	.4375-20UNJF-3B	0.679 - 0.690	0.766	0.438 - 0.458
MS9201-05	.312	.5000-20UNJF-3B	0.741 - 0.752	0.836	0.500 - 0.520
MS9201-06	.375	.5625-18UNJF-3B	0.803 - 0.814	0.907	0.562 - 0.582
MS9201-07	.438	.6250-18UNJF-3B	0.865 - 0.877	0.978	0.625 - 0.645
MS9201-08	.500	.7500-16UNJF-3B	0.990 - 1.002	1.121	0.750 - 0.770
MS9201-09	.562	.8125-16UNJ-3B	1.052 - 1.064	1.191	0.812 - 0.832
MS9201-10	.625	.8750-14UNJF-3B	1.114 - 1.127	1.262	0.875 - 0.895
MS9201-11	.688	1.0000-12UNJF-3B	1.301 - 1.314	1.475	1.000 - 1.020
MS9201-12	.750	1.0625-12UNJ-3B	1.364 - 1.377	1.547	1.062 - 1.082
MS9201-14	.875	1.1875-12UNJ-3B	1.489 - 1.502	1.690	1.188 - 1.208
MS9201-16	1.000	1.3125-12UNJ-3B	1.614 - 1.627	1.833	1.312 - 1.332
MS9201-18	1.125	1.5000-12UNJ-3B	1.800 - 1.814	2.045	1.500 - 1.520
MS9201-20	1.250	1.6250-12UNJ-3B	1.926 - 1.940	2.189	1.625 - 1.645
MS9201-24	1.500	1.8750-12UNJ-3B	2.176 - 2.190	2.474	1.875 - 1.895
MS9201-28	1.750	2.2500-12UNJ-3B	2.549 - 2.564	2.899	2.250 - 1.270
MS9201-32	2.000	2.5000-12UNJ-3B	2.799 - 2.814	3.185	2.500 - 2.520