


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5310	
	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. THIS STANDARD HAS BEEN STABILIZED. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
MA3428	SAENORM.COM : Click to view the full PDF of ma3428a	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: MA1937, SEE NOTE 6
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/MA3428A		THIRD ANGLE PROJECTION 
SAE INTERNATIONAL		METRIC AEROSPACE STANDARD NUT, CASTELLATED, HEX - THIN, UNS S66286, SILVER PLATE, MJ THREAD, METRIC
MA3428		REV. A

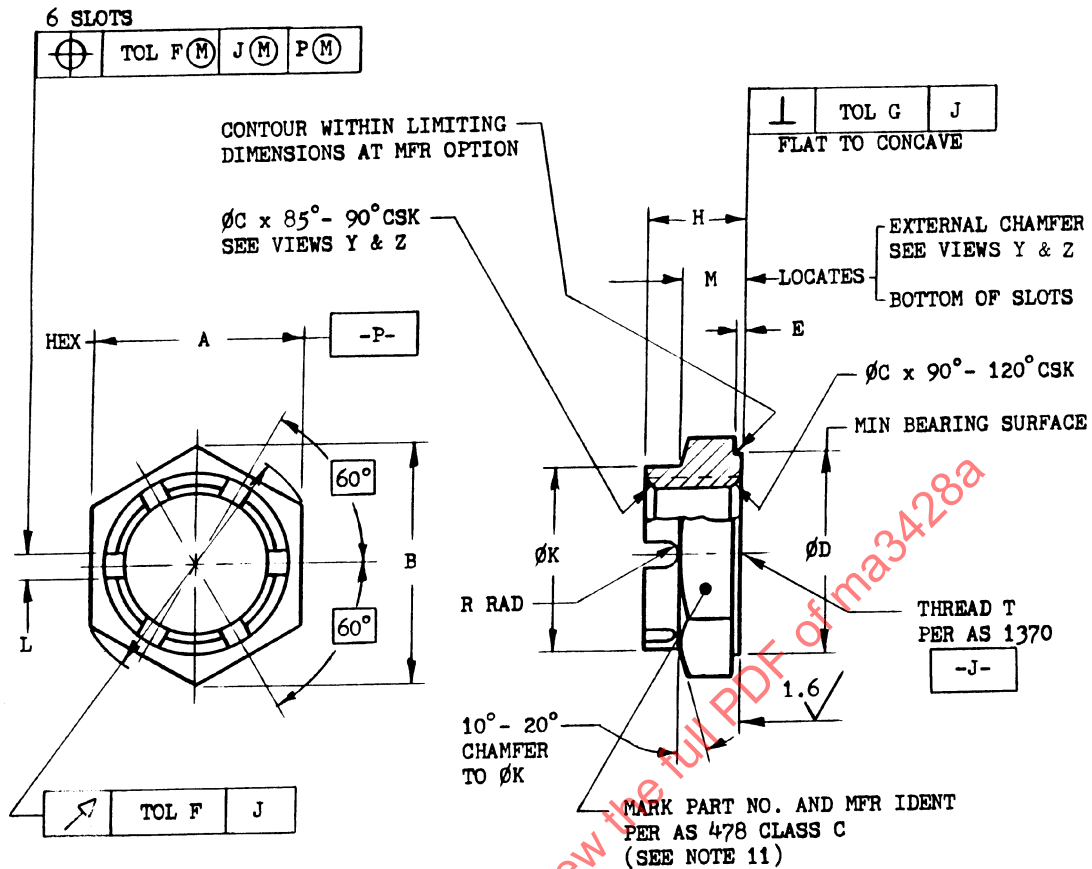


TABLE I. DIMENSIONS

PART NO.	THREAD T	A	1/ MIN	B MIN	C	D MIN	E	F	G
MA3428-04	MJ4 x 0.7-4H6H	6.85 - 7.00	h12	7.6	4.2 - 4.8	6.4	0.2 - 0.5	0.20	0.10
MA3428-05	MJ5 x 0.8-4H6H	7.85 - 8.00		8.7	5.2 - 5.8	7.4	0.2 - 0.5	0.20	0.10
MA3428-06	MJ6 x 1-4H5H	9.78 - 10.00		10.9	6.3 - 7.1	9.3	0.2 - 0.5	0.20	0.10
MA3428-07	MJ7 x 1-4H5H	10.73 - 11.00		12.0	7.3 - 8.1	10.2	0.2 - 0.5	0.20	0.10
MA3428-08	MJ8 x 1-4H5H	11.73 - 12.00	h13	13.2	8.3 - 9.1	11.2	0.2 - 0.5	0.20	0.10
MA3428-10	MJ10 x 1.25-4H5H	13.73 - 14.00		15.5	10.3 - 11.1	13.2	0.3 - 0.6	0.25	0.13
MA3428-12	MJ12 x 1.25-4H5H	16.73 - 17.00		18.9	12.3 - 13.1	16.0	0.3 - 0.6	0.25	0.13
MA3428-14	MJ14 x 1.5-4H5H	18.67 - 19.00		21.1	14.4 - 15.2	18.0	0.3 - 0.6	0.25	0.15
MA3428-16	MJ16 x 1.5-4H5H	21.67 - 22.00	h13	24.5	16.4 - 17.2	21.0	0.3 - 0.6	0.30	0.18
MA3428-18	MJ18 x 1.5-4H5H	23.67 - 24.00		26.8	18.4 - 19.2	23.0	0.3 - 0.6	0.30	0.18
MA3428-20	MJ20 x 1.5-4H5H	26.67 - 27.00		30.2	20.4 - 21.2	26.0	0.3 - 0.6	0.30	0.18

1/ TOLERANCE GRADES TO ANSI B4.2-1978



METRIC AEROSPACE STANDARD

NUT, CASTELLATED, HEX - THIN,
UNS S66286, SILVER PLATE,
MJ THREAD, METRIC

MA3428
SHEET 1 OF 2

REV.
A