
**Aerospace — Couplings, threaded
and sealed, for fluid systems —
Dimensions**

*Aéronautique et espace — Raccordement fileté étanche pour les
systèmes de fluides — Dimensions*

STANDARDSISO.COM : Click to view the full PDF of ISO 7320:2021



STANDARDSISO.COM : Click to view the full PDF of ISO 7320:2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Sealing principle and assembly of the coupling	1
5 Dimensions	1
5.1 Port connection	1
5.2 Fitting end	3
5.3 O-ring seal	5
Bibliography	7

STANDARDSISO.COM : Click to view the full PDF of ISO 7320:2021

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 10, *Aerospace fluid systems and components*.

This third edition cancels and replaces the second edition (ISO 7320:1992), of which it constitutes a minor revision.

The main changes compared to the previous edition are as follows:

- the normative reference has been changed from dated to undated.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Aerospace — Couplings, threaded and sealed, for fluid systems — Dimensions

1 Scope

This document establishes a system for sealing the port connection of couplings used in the aerospace industry.

It specifies dimensions to achieve interchangeability of the port connection, the fitting end and a seal. The seal can be a standard O-ring or a special ring.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5855-3, *Aerospace — MJ threads — Part 3: Limit dimensions for fittings for fluid systems*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Sealing principle and assembly of the coupling

The coupling comprises three elements:

- a) the port element, including the internal thread (see [5.1](#));
- b) the fitting element, including an external thread and a groove intended to receive the O-ring (see [5.2](#)) or a special seal; this element is screwed into the internal threaded element;
- c) the seal element, which maintains system pressure without leakage [a standard O-ring (see [5.3](#)) or special seal].

5 Dimensions

5.1 Port connection

See [Figure 1](#) and [Table 1](#).

X



- Figure 1 — Port connection configuration**

Table 1 — Port connection dimensions

Dimensions in millimetres

DN ^a	Thread ^b 4H5H	<i>B</i> +0,4 0	<i>D</i> ₁ nom. tol.		<i>D</i> ₂ +0,4 0	<i>E</i> min.	<i>M</i>	<i>N</i> min.	<i>U</i> min.	<i>V</i> max.
03	MJ8 × 1	1,9	8,6	+0,1 0	11,3	11	0,08	Internal diameter of tube	15	15
04			10,6		13,3				18	
05			12,4		15,1				12,5	
06	MJ12 × 1,25	3,4	14,6	+0,15 0	18,3	16	0,1		23	21
08	MJ14 × 1,5		16,6		20,3				25	
10	MJ16 × 1,5		18,6		22,3				28	
12	MJ18 × 1,5		20,6		24,3				31	
14	MJ20 × 1,5		22,6		26,3				33	
16	MJ22 × 1,5		24,6		28,3				37	
18	MJ24 × 1,5		27,6		31,3				42	
20	MJ27 × 1,5		30,6		34,3				47	
22	MJ30 × 1,5		33,6		37,3				56	
25	MJ33 × 1,5		36,6		40,3				61	
28	MJ36 × 1,5		4,3		43	20	0,2			
32	MJ42 × 2	51			47,1					
40	MJ50 × 2	55,1		61	26					

^a DN = Nominal size (outside diameter of the corresponding tube).

^b Threads shall be in accordance with ISO 5855-3.

5.2 Fitting end

See [Figure 2](#) and [Table 2](#).

Surface roughness values in micrometres

© ISO 2021 – All rights reserved



Figure 2 — Fitting end configuration

Table 2 — Fitting end dimensions

Dimensions in millimetres

DN ^a	Thread ^b 4h6h	C ±0,5	F 0 −0,2	H +0,4 0	J		S		T +0,5 0	Y min.
					nom.	tol.	nom.	tol.		
03	MJ8 × 1	6,2	10	1,9	6,3	0 −0,08	14		13,8	3
04										
05	MJ10 × 1	8,2			8,3		17		16,8	
06	MJ12 × 1,25	9,8	11,5		10,1		19		18,7	
08	MJ14 × 1,5	11,5	15	3,4	11,7	0 −0,15	22	h13	21,7	4
10	MJ16 × 1,5	13,5			13,7		24		23,7	5
12	MJ18 × 1,5	15,5			15,7		27		26,7	
14	MJ20 × 1,5	17,5			17,7		30		29,7	
16	MJ22 × 1,5	19,5			19,7		32		31,6	
18	MJ24 × 1,5	21,5			21,7		36	35,4		
20	MJ27 × 1,5	24,5			24,7		h14	41	40,4	6
22	MJ30 × 1,5	27,5			27,7			46	45,4	
25	MJ33 × 1,5	30,5			30,7			50	49,4	
28	MJ36 × 1,5	33,5			33,7			60	59,3	
32	MJ42 × 2	38,9			19			4,3	39	
40	MJ50 × 2	46,9	47	60						

^a DN = Nominal size (outside diameter of the corresponding tube).

^b Threads shall be in accordance with ISO 5855-3.

5.3 O-ring seal

See [Figure 3](#) and [Table 3](#).

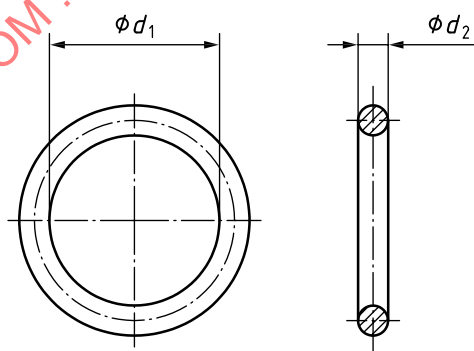


Figure 3 — O-ring seal configuration