

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

AS10051™

FEDERAL SUPPLY CLASS
5975

RATIONALE

REVISION REQUIRED TO CONVERT WORD-FOR-WORD AS10051 TO SAE FORMAT, CLARIFY FIGURES, AND MAKE MINOR TECHNICAL CHANGES AS NEEDED.

NOTICE

AS10051 IS A DESIGN STANDARD FOR DIMENSIONS REQUIRED FOR CONDUIT HUB CONNECTIONS USED FOR INSTALLATION OF ELECTRICAL DISTRIBUTION CONDUITS IN AIRCRAFT. AS10051 HAS NO PROCUREMENT REQUIREMENTS.


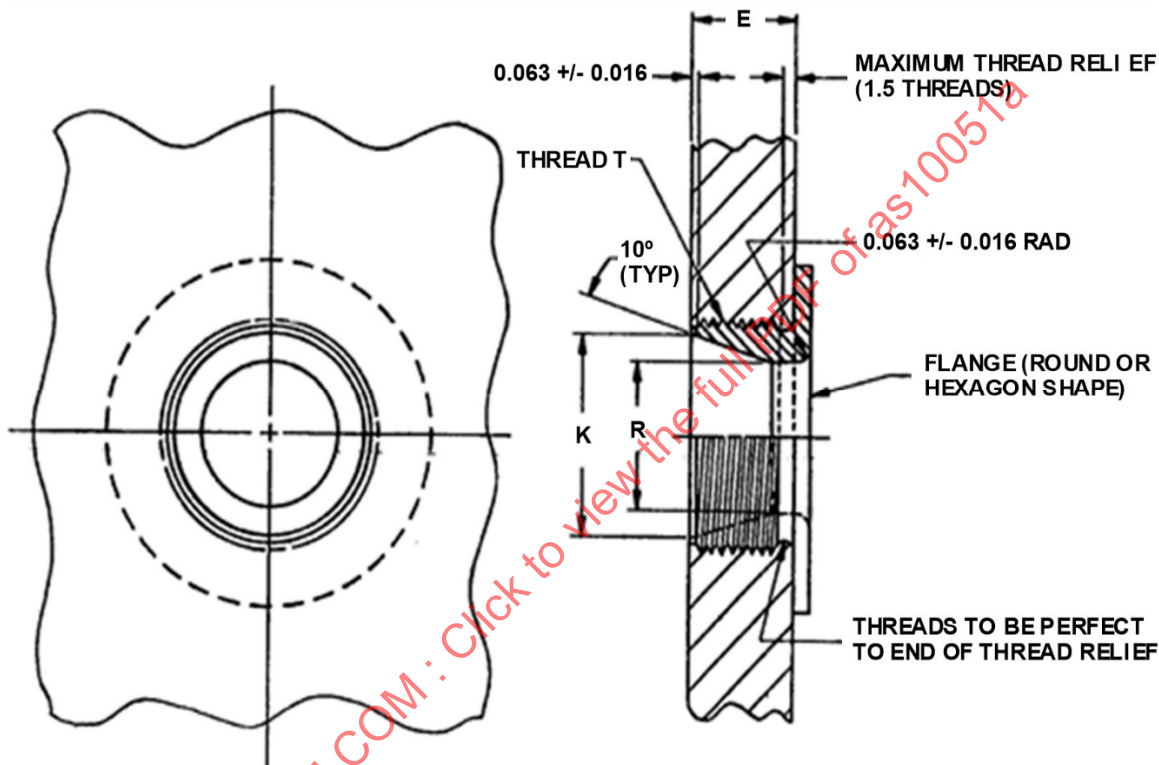


FIGURE 1 - TYPE I HUB

For more information on this standard, visit
<https://www.sae.org/standards/content/AS10051a>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8A

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

(R) HUBS, CONDUIT CONNECTION,
STANDARD DIMENSIONS

AS10051™
SHEET 1 OF 3

REV.
A

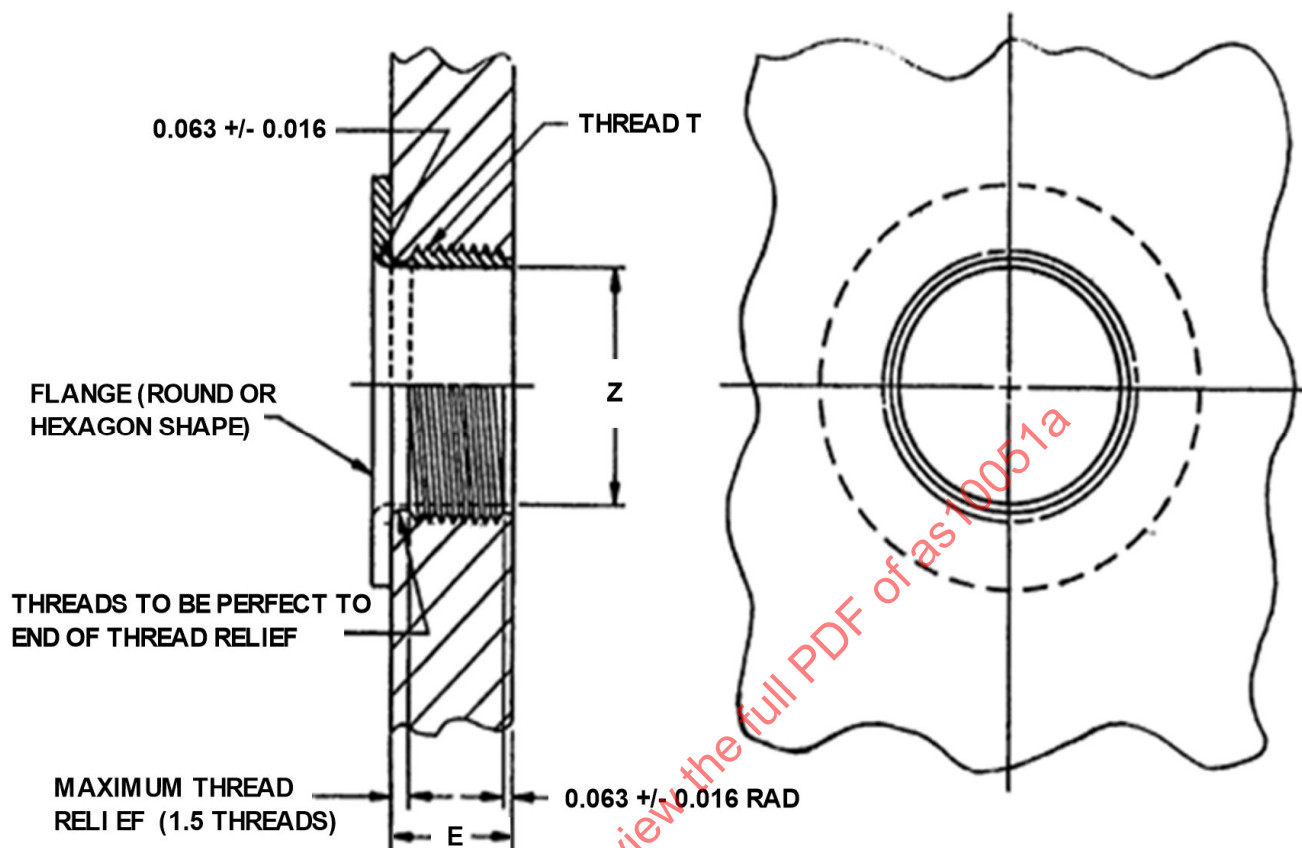


FIGURE 2 - TYPE II HUB

TABLE 1 - HUB DIMENSIONS

DASH NO.	CONDUIT ID 1/		THREAD T 2/	E MIN	K	R	Z MAX
3	3/16	.1875	.5000-28UNEF-2A	.3750	.332	.167	.353
4	1/4	.2500	.6250-24UNEF-2A		.394	.229	.478
6	3/8	.3750	.7500-20UNEF-2A		.519	.354	.591
8	1/2	.5000	.8750-20UNEF-2A		.669	.479	.634
10	5/8	.6250	1.0000-20UNEF-2A		.794	.604	.759
12	3/4	.7500	1.1875-18UNEF-2A		.929	.729	.950
16	1	1.0000	1.4375-18UNEF-2A		1.214	.979	1.235
20	1 1/4	1.2500	1.7500-18UNEF-2A	.4370	1.469	1.229	1.490
24	1 1/2	1.5000	2.0000-18UNEF-2A	.5000	1.724	1.479	1.745
28	1 3/4	1.7500	2.2500-16UN-2A		1.976	1.729	1.997
32	2	2.0000	2.5000-16UN-2A		2.229	1.979	2.250
40	2 1/2	2.5000	3.0000-16UN-2A	.6250	2.744	2.479	2.765

1/ REFER TO AS6136 CONDUIT, ELECTRICAL, FLEXIBLE, SHIELDED, ALUMINUM ALLOY FOR AIRCRAFT INSTALLATION.

2/ REFER TO MIL-S-7742 FOR DETAIL THREAD INFORMATION.



AEROSPACE STANDARD

(R) HUBS, CONDUIT CONNECTION,
STANDARD DIMENSIONS

AS10051™
SHEET 2 OF 3

REV.
A