



AEROSPACE STANDARD


AS 1159

SOCIETY OF AUTOMOTIVE ENGINEERS, Inc. Two Pennsylvania Plaza, New York, N.Y. 10001

Issued 1-15-70

Revised

WRENCHING CONFIGURATION, SPLINE DRIVE THREADED FASTENERS

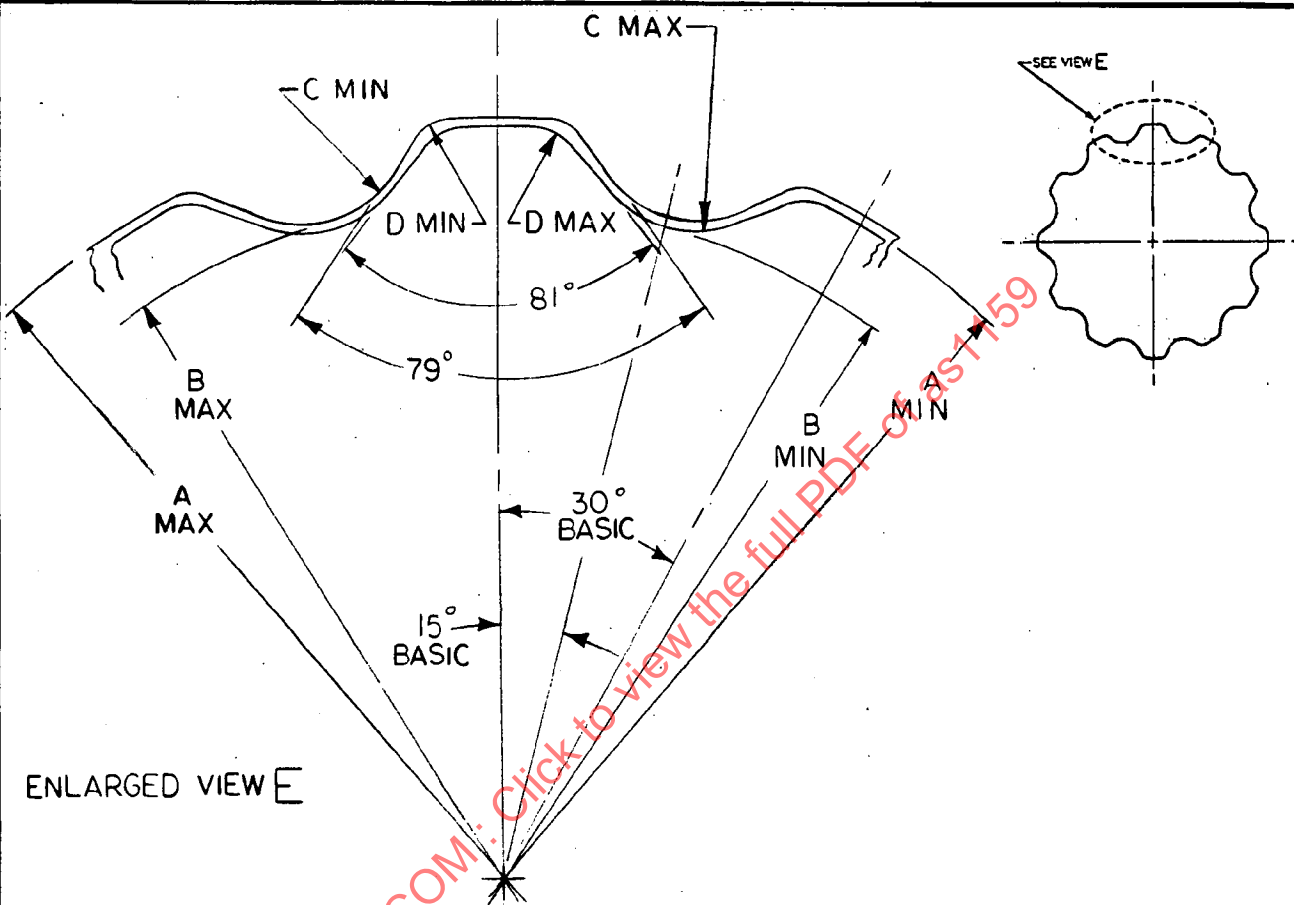

ENLARGED VIEW E

DESIGN STD. NO.	NOMINAL HEAD SIZE	MAXIMUM MATERIAL CONDITION				MINIMUM MATERIAL CONDITION			
		A DIA. MAX.	B DIA. MAX.	C RAD MIN.	D RAD MIN.	A DIA. MIN.	B DIA. MIN.	C RAD MAX.	D RAD MAX.
06	.188	.223	.197	.020	.005	.219	.193	.025	.010
07	.219	.259	.229	.023	.005	.255	.225	.028	.010
08	.250	.295	.261	.025	.005	.291	.257	.030	.010
10	.312	.368	.327	.030	.009	.363	.322	.035	.015
12	.375	.439	.391	.035	.009	.434	.386	.040	.015
14	.438	.512	.456	.040	.014	.507	.451	.045	.020
16	.500	.585	.522	.045	.014	.580	.517	.050	.020
18	.562	.656	.586	.050	.019	.650	.580	.055	.025
20	.625	.733	.652	.055	.019	.727	.646	.060	.025
22	.688	.806	.717	.060	.024	.800	.711	.065	.030
24	.750	.879	.783	.065	.024	.873	.777	.070	.030
26	.812	.951	.849	.070	.029	.944	.842	.075	.035
28	.875	1.023	.913	.075	.029	1.016	.906	.080	.035
30	.938	1.097	.979	.080	.034	1.090	.972	.085	.040

SAE Technical Board rules provide that: "All technical reports, including standards, approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against liability for infringement of patents."