

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS122900 THRU MS122939 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS122900 THRU MS122939. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as122900a

	AEROSPACE STANDARD	AS122900™ THRU AS122939™ SHEET 1 OF 3	REV. A
	CLAMP - LOOP TYPE SUPPORT (HEAT RESISTANT) .204 HOLE		

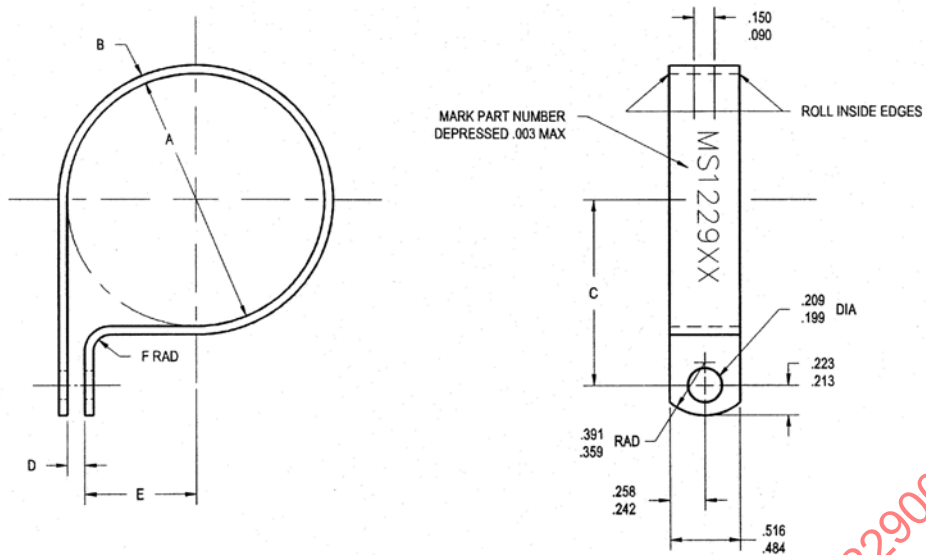

NOM TUBE OD	A DIA BASIC	B ±.005	C ±.010	D	E REF	F RAD ±.016	APPROX WEIGHT LBS. EA	PART NUMBER
.125	.125	.031	.360	.062-.078	0	.062	.0055	MS122900
.188	.188	.031	.423	.062-.078	.031	.062	.0066	MS122901
.250	.250	.031	.457	.062-.078	.062	.062	.0075	MS122902
.312	.312	.031	.498	.062-.078	.094	.062	.0085	MS122903
.375	.375	.031	.529	.062-.078	.125	.062	.0094	MS122904
.438	.438	.031	.560	.062-.078	.156	.062	.0103	MS122905
.500	.500	.031	.592	.062-.078	.188	.062	.0112	MS122906
.562	.562	.031	.623	.062-.078	.219	.062	.0122	MS122907
.625	.625	.031	.654	.062-.078	.250	.062	.0131	MS122908
.688	.688	.051	.752	.062-.078	.281	.109	.0237	MS122909
.750	.750	.051	.783	.062-.078	.312	.109	.0252	MS122910
.812	.812	.051	.814	.062-.078	.344	.109	.0267	MS122911
.875	.875	.051	.845	.062-.078	.375	.109	.0283	MS122912
.938	.938	.051	.877	.062-.078	.406	.109	.0298	MS122913
1.000	1.000	.051	.908	.062-.078	.438	.109	.0313	MS122914
1.062	1.062	.051	.939	.062-.078	.469	.109	.0331	MS122915
1.125	1.125	.051	.970	.062-.078	.500	.109	.0343	MS122916
1.188	1.188	.051	1.002	.062-.078	.531	.109	.0359	MS122917
1.250	1.250	.064	1.062	.094-.110	.531	.125	.0471	MS122918
1.312	1.312	.064	1.093	.094-.110	.562	.125	.0490	MS122919
1.375	1.375	.064	1.125	.094-.110	.594	.125	.0509	MS122920
1.438	1.438	.064	1.156	.094-.110	.625	.125	.0528	MS122921
1.500	1.500	.064	1.188	.094-.110	.656	.125	.0547	MS122922
1.562	1.562	.064	1.219	.094-.110	.688	.125	.0566	MS122923
1.625	1.625	.064	1.250	.094-.110	.719	.125	.0585	MS122924
1.750	1.750	.064	1.312	.094-.125	.781	.125	.0623	MS122925
1.875	1.875	.064	1.375	.094-.125	.844	.125	.0661	MS122926
2.000	2.000	.064	1.438	.094-.125	.906	.125	.0696	MS122927



AEROSPACE STANDARD

CLAMP - LOOP TYPE SUPPORT (HEAT RESISTANT)
.204 HOLE

AS122900™ THRU
AS122939™
SHEET 2 OF 3

REV.
A