

REV.
A

AS15006

FEDERAL SUPPLY CLASS
4730

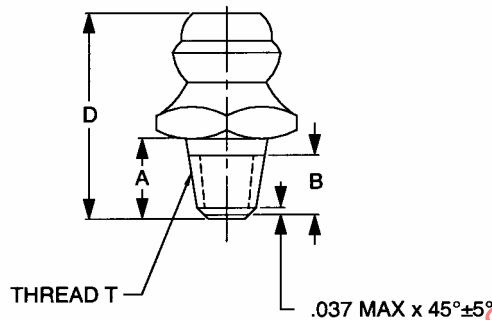



FIGURE 1 - FITTING, STRAIGHT


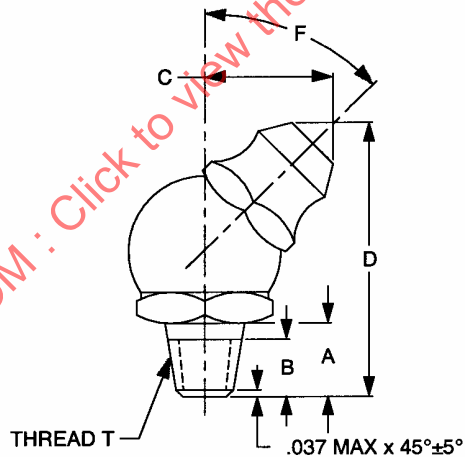


FIGURE 2 - FITTING, ELBOW



THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS35411 /5/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING, LUBRICATION, HYDRAULIC,
LEAKPROOF, 1/8 PIPE THREADS,
STEEL, TYPE VI

AS15006
SHEET 1 OF 3

**REV.
A**

Copyright 2005 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2001-05 REVISED 2005-08

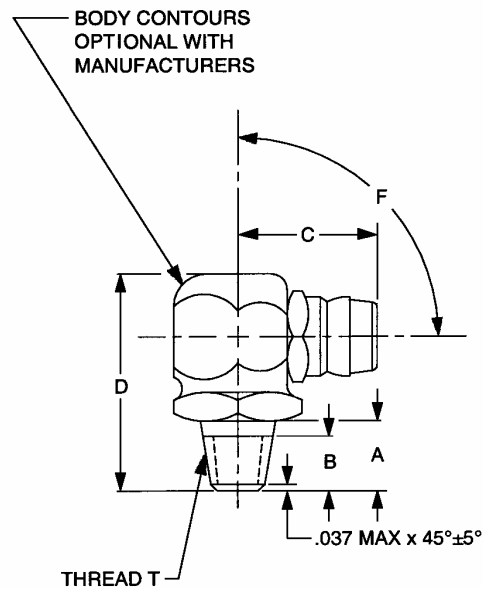


FIGURE 3 - FITTING, ELBOW, 90°

TABLE 1 - DIMENSIONS AND WEIGHTS

PART NUMBER	FIG.	THREAD T	A ±.031	B ±.031	C MAX.	D MAX.	E +.000 -.003	F ±5°	LB/100 APPROX. REF STEEL
AS15006-1	1	1/8-27	.375	.2656	—	.938	.438	—	
AS15006-2	2	1/8-27	.375	.2656	.500	1.375	.438	30°	
AS15006-3	2	1/8-27	.375	.2656	.563	1.125	.438	65°	
AS15006-4	3	1/8-27	.375	.2656	.625	1.000	.438	90°	
AS15006-5	3	1/8-27	.375	.2656	.625	1.188	.438	105°	

NOTES:

1. MATERIAL: STEEL. SEE PROCUREMENT SPECIFICATION.
2. HEAT TREATMENT: NONE.
3. FINISH:
 - a. CODE LETTER C – CADMIUM PLATE, SEE PROCUREMENT SPECIFICATION. /17/
 - b. CODE LETTER P – ZINC PLATE, SEE PROCUREMENT SPECIFICATION.
4. IDENTIFICATION: MARK PER AS478 METHOD 35D MANUFACTURER'S NAME, CAGE CODE OR TRADEMARK, AND PART NUMBER.
- /5/ PROCUREMENT SPECIFICATION: AS35411 EXCEPT AS SPECIFIED ON THIS STANDARD. THE DRAWING AND ALL THE SPECIFIED DOCUMENTS DEFINE THE REQUIREMENTS FOR THE END PRODUCT. ALL THE REQUIREMENTS MUST BE MET IN ORDER TO IDENTIFY THE ITEM WITH THAT PART NUMBER.