

**REV.
D**

AS1715

FEDERAL SUPPLY CLASS
4730

RATIONALE

REVISION 'D' ADDS QPL/QML REQUIREMENTS AND PROVIDES A GENERAL UPDATE.


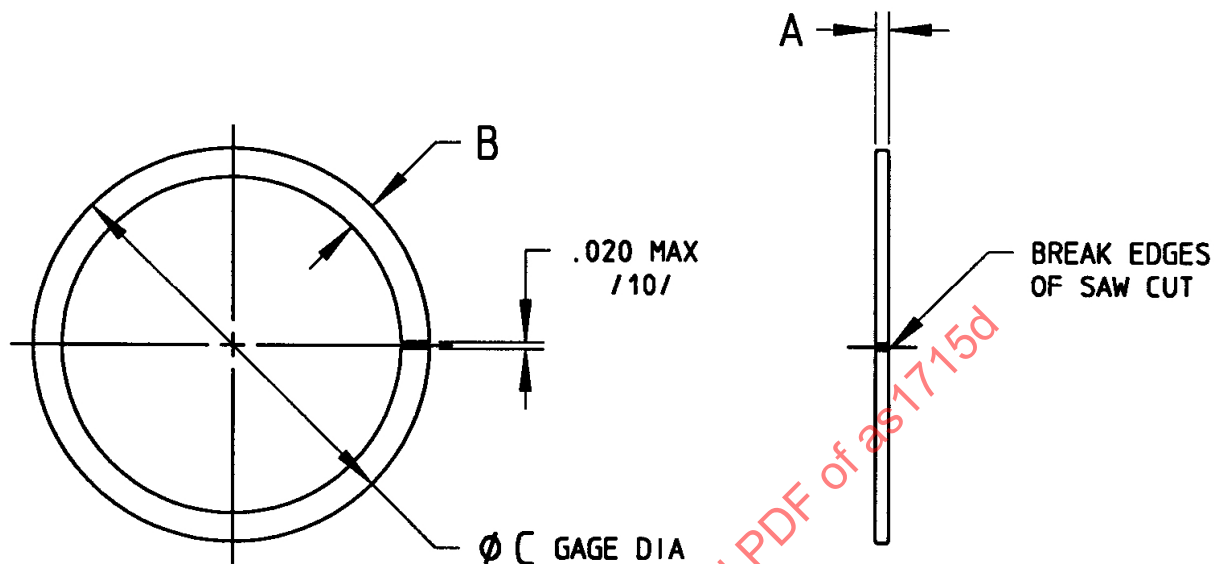


FIGURE 1 - WASHER

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3A

PROCUREMENT SPECIFICATION: /4/ AS1710

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) WASHER, COUPLING, FLEXIBLE,
VARIABLE CAVITY, THREADED,
FERRULE TYPE TUBE ENDS

AS1715
SHEET 1 OF 3

**REV.
D**

REV.
D

AS1715

TABLE 1 - COUPLING WASHER DIMENSIONS AND WEIGHTS

BASIC NO. AS1715	(TUBE SIZE)	A +.000/- .008	B ±.004	C-GAGE +.0000/- .0002	MATERIAL	WEIGHT LB/EA APPROX. REF.
-08	.500	.054	.082	.7990	ALUMINUM	.001
-10	.625	.054	.082	.9240	ALUMINUM	.002
-12	.750	.054	.115	1.1340	ALUMINUM	.003
-16	1.000	.054	.119	1.3940	ALUMINUM	.003
-20	1.250	.054	.119	1.6440	ALUMINUM	.003
-24	1.500	.054	.176	2.0130	ALUMINUM	.005
-28	1.750	.054	.176	2.2630	ALUMINUM	.006
-32	2.000	.054	.180	2.5230	ALUMINUM	.007
-36	2.250	.054	.180	2.7730	ALUMINUM	.007
-40	2.500	.054	.180	3.0230	ALUMINUM	.008
-44	2.750	.054	.180	3.2730	CRES	.025
-48	3.000	.054	.171	3.5060	CRES	.025
-56	3.500	.054	.171	4.0060	CRES	.029
-64	4.000	.054	.171	4.5150	CRES	.033
-72	4.500	.054	.227	5.1320	CRES	.049
-80	5.000	.067	.224	5.6260	CRES	.068
-88	5.500	.067	.224	6.1260	CRES	.074

NOTES:

1. MATERIAL

- a. ALUMINUM ALLOY 2024-T4 PER AMS-QQ-A-225/6, AMS-QQ-A-200/3, OR 2024-T3, T351 OR T3511 PER AMS-QQ-A-250/4 OR AMS-QQ-A-225/6
- b. CORROSION RESISTANT STEEL 17-7PH PER AMS 5528 OR AMS 5529

2. HEAT TREATMENT:

- a. ALUMINUM: NONE
- b. CRES: HEAT TREAT AMS 5529 TO CH900 CONDITION

3. FINISH:

- a. ALUMINUM: ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR OPTIONAL
- b. CRES: PASSIVATE PER AMS 2700 METHOD I, TYPE 2 OR TYPE 8

/4/ WASHERS SUPPLIED TO THIS SPECIFICATION SHALL BE MANUFACTURED BY AN ACCREDITED MANUFACTURER OR SUPPLIED BY AN ACCREDITED DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST FOR PRI-QPL-AS1710 FOR THIS STANDARD. THE QPL IS AVAILABLE AT www.eauditnet.com.

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) WASHER, COUPLING, FLEXIBLE,
VARIABLE CAVITY, THREADED,
FERRULE TYPE TUBE ENDS

AS1715
SHEET 2 OF 3

REV.
D