

REV.
A

SAE AS33391

FEDERAL SUPPLY CLASS
5975

RATIONALE

REDRAWN TO MAKE THE DRAWINGS AND CHARTS MORE LEGIBLE.

NOTICE

THE REQUIREMENTS FOR PROCURING THE MOUNTING PLATES DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF SAE AS23190.

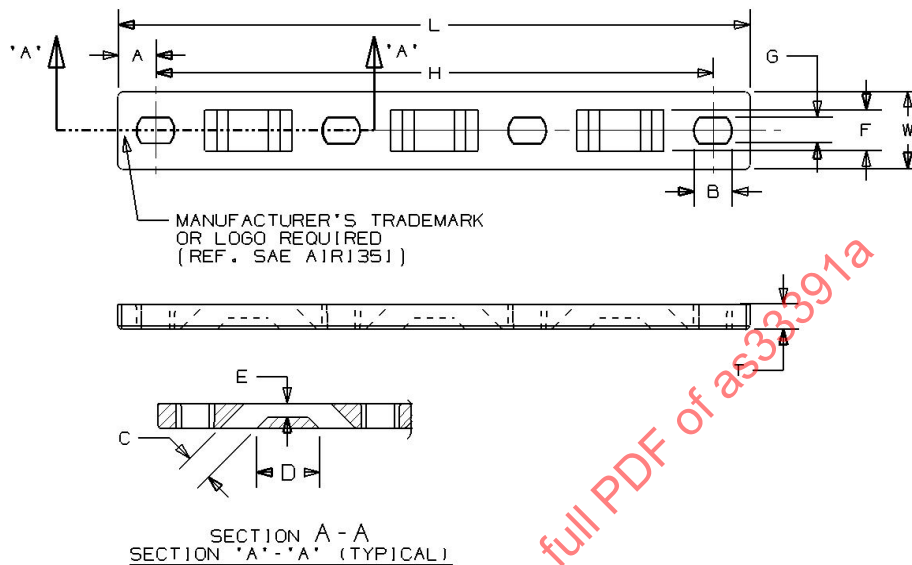



FIGURE 1 - MS3339 MOUNTING PLATE CONFIGURATION

TABLE 1 - FIGURE 1 DIMENSIONS

DASH NO.	NO. OF BUNDLE	H ± 1/16	L ± 1/16	A MIN	B MIN	C MIN	D MIN	E MIN	F MIN	G	W ± .015	T ± .010	MINIMUM TENSILE	PLASTIC STRAPS
-1	1	1-1/4	1-3/4	.240	.260 .180	.065	.312	.061	.195	.152 .142	.500	.125	50	MS3367-1 MS3367-2 MS3367-4 MS3367-5
-2	2	2-1/2	3											
-3	3	3-3/4	4-1/4											
-4	4	5	5-1/2											
-5	5	6-1/4	6-3/4											
-6	1	1-1/2	2-3/32	.240	.260 .180	.093	.500	.093	.313	.152 .142	.625	.303	120	MS3367-3 MS3367-6
-7	2	3	3-19/32											
-8	3	4-1/2	5-3/32											
-9	4	6	6-19/32											
-10	5	7-1/2	8-3/32											
-11	6	9	9-19/32											

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS33391A>

THIRD ANGLE PROJECTION



CUSTODIAN: AE-8/AE-8C2

PROCUREMENT SPECIFICATION: MIL-S-23190

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) PLATE, MOUNTING, PLASTIC
FOR USE WITH MS3367
PLASTIC TIEDOWN STRAPS

SAE AS33391
SHEET 1 OF 2

REV.
A