

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."


SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS5869

RATIONALE


FEDERAL SUPPLY CLASS
4730

THIS STANDARD WAS PREPARED TO PROVIDE AN ENVELOPE REQUIREMENTS FOR AN AXIALLY SWAGED, FIELD ATTACHABLE, 5000 PSI, TUBE FITTING.

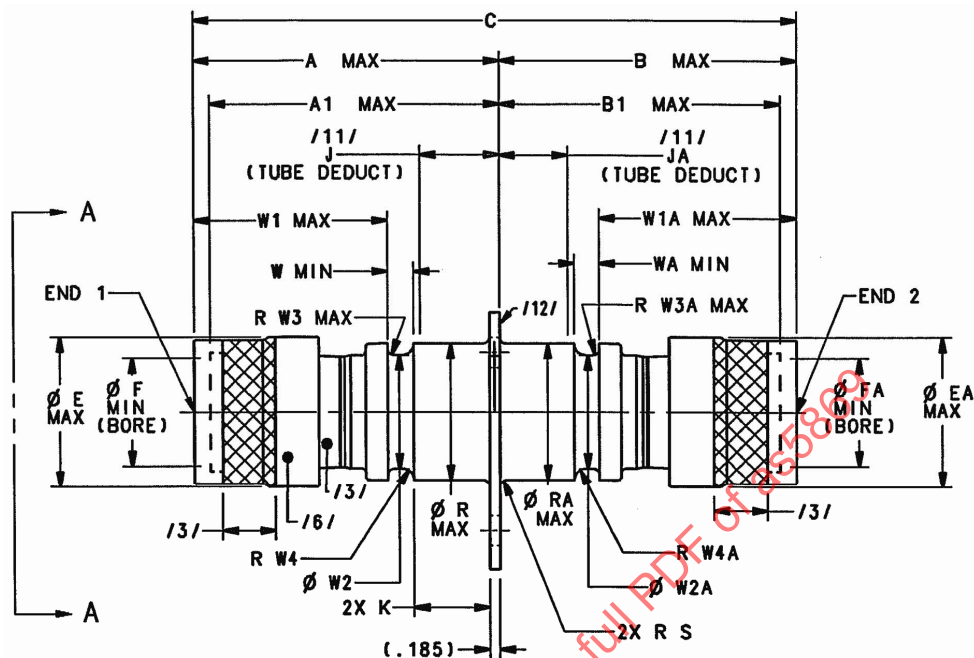

(SEE TABLE 1 FOR DIMENSIONAL INFORMATION)


FIGURE 1 - ADAPTER, SWAGE

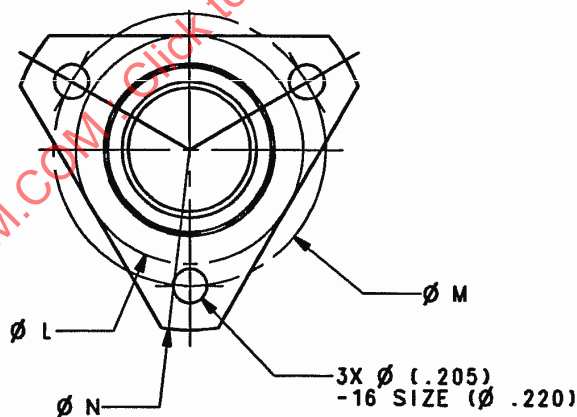

VIEW A-A

FIGURE 2

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: AS5958

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

FITTING ASSEMBLY, UNION,
3 HOLE FLANGE, AXIALLY SWAGED,
HYDRAULIC, 5080 PSI

AS5869
SHEET 1 OF 3

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2006-02

TABLE 1A - DIMENSIONS A THROUGH FA

BASIC NO. AS5869 /13/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	A	A1	B	B1	C	E	EA	F	FA
0404	.2500	.2500	1.333	1.246	1.148	1.061	2.421	.466	.466	.253	.253
0604	.3750	.2500	1.550	1.434	1.148	1.061	2.638	.609	.466	.378	.253
0606	.3750	.3750	1.550	1.434	1.365	1.249	2.855	.609	.609	.378	.378
0806	.5000	.3750	1.758	1.612	1.365	1.249	3.063	.783	.609	.504	.378
0808	.5000	.5000	1.758	1.612	1.573	1.427	3.271	.783	.783	.504	.504
1008	.6250	.5000	2.052	1.848	1.573	1.427	3.565	.939	.783	.629	.504
1010	.6250	.6250	2.052	1.848	1.867	1.663	3.859	.939	.939	.629	.629
1210	.7500	.6250	2.203	1.998	1.867	1.663	4.010	1.122	.939	.754	.629
1212	.7500	.7500	2.203	1.998	2.018	1.813	4.161	1.122	1.122	.754	.754
1612	1.0000	.7500	2.501	2.287	2.018	1.813	4.459	1.495	1.122	1.004	.754
1616	1.0000	1.0000	2.501	2.287	2.316	2.102	4.757	1.495	1.495	1.004	1.004

TABLE 1B - DIMENSIONS J THROUGH S

BASIC NO. AS5869 /13/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	J /11/ TUBE DEDUCT	JA /11/ TUBE DEDUCT	K	L	M	N	R	RA	S
0404	.2500	.2500	.751 ±.150	.566 ±.150	.512	1.496	1.496	2.200	.426	.426	.090
0604	.3750	.2500	.751 ±.150	.566 ±.150	.512	1.496	1.575	2.280	.573	.426	.090
0606	.3750	.3750	.751 ±.150	.566 ±.150	.512	1.496	1.575	2.280	.573	.573	.090
0806	.5000	.3750	.759 ±.175	.566 ±.150	.512	1.575	1.811	2.560	.848	.573	.090
0808	.5000	.5000	.759 ±.175	.574 ±.175	.512	1.575	1.811	2.560	.848	.848	.090
1008	.6250	.5000	.759 ±.175	.574 ±.175	.512	1.693	1.811	2.560	.888	.848	.090
1010	.6250	.6250	.759 ±.175	.574 ±.175	.512	1.693	1.811	2.560	.888	.888	.090
1210	.7500	.6250	.766 ±.175	.574 ±.175	.512	1.772	1.929	2.560	1.064	.888	.090
1212	.7500	.7500	.766 ±.175	.581 ±.175	.512	1.772	1.929	2.560	1.064	1.064	.090
1612	1.0000	.7500	.773 ±.200	.581 ±.175	.512	2.047	2.283	2.910	1.366	1.064	.090
1616	1.0000	1.0000	.773 ±.200	.588 ±.200	.512	2.047	2.283	2.910	1.366	1.366	.090

TABLE 1C - DIMENSIONS W THROUGH W4A AND WEIGHTS

BASIC NO. AS5869 /13/ SIZE CODE	NOMINAL TUBE SIZE END 1	NOMINAL TUBE SIZE END 2	W	WA	W1	W1A	W2 ±.0015	W2A ±.0015	W3	W3A	W4	W4A	MAX WEIGHT LBS/EA
0404	.2500	.2500	.123	.123	.488	.488	.3005	.3005	.018	.018	.065	.065	.108
0604	.3750	.2500	.153	.123	.675	.488	.4475	.3005	.033	.018	.065	.065	.127
0606	.3750	.3750	.153	.153	.675	.675	.4475	.4475	.033	.033	.065	.065	.142
0806	.5000	.3750	.165	.153	.871	.675	.5945	.4475	.033	.033	.129	.065	.182
0808	.5000	.5000	.165	.165	.871	.871	.5945	.5945	.033	.033	.129	.129	.214
1008	.6250	.5000	.140	.165	1.190	.871	.7365	.5945	.021	.033	.078	.021	.237
1010	.6250	.6250	.140	.140	1.190	1.190	.7365	.7365	.021	.021	.078	.078	.256
1210	.7500	.6250	.154	.140	1.327	1.190	.8805	.7365	.024	.021	.089	.078	.283
1212	.7500	.7500	.154	.154	1.327	1.327	.8805	.8805	.024	.024	.089	.089	.329
1612	1.0000	.7500	.167	.154	1.612	1.327	1.1725	.8805	.027	.024	.099	.089	.456
1616	1.0000	1.0000	.167	.167	1.612	1.612	1.1725	1.1725	.027	.027	.099	.099	.567