

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

AS6071

FEDERAL SUPPLY CLASS
3120

RATIONALE

NEW STANDARD PROVIDES CLAMP UP BUSHINGS INTENDED FOR USE WITH PLAIN SPHERICAL BEARINGS SUCH AS AS81820 AND AS81936.

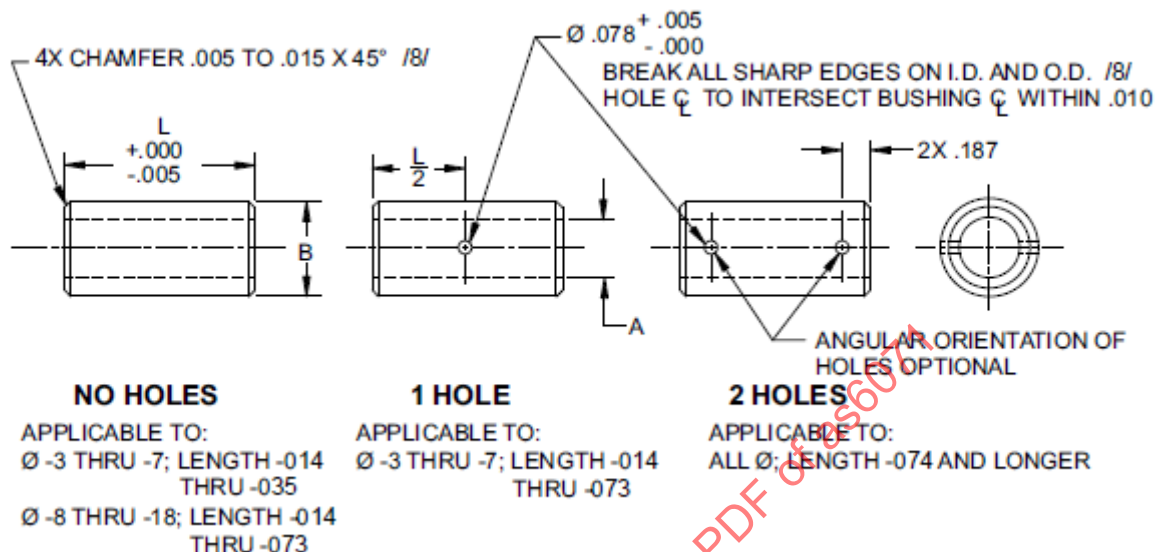



FIGURE 1 - AS6071 BUSHING

TABLE 1 - BUSHING DIMENSIONS

BASIC NO. AS6071 SIZE CODE	A +.0010 -.0000	B	RECOMMENDED HOLE SIZE FOR INSTALLATION
-3	.1900	.3115	+.0000 -.0005
-4	.2500	.3740	+.0000 -.0005
-5	.3125	.4365	+.0000 -.0005
-6	.3750	.4990	+.0000 -.0005
-7	.4375	.5615	+.0000 -.0005
-8	.5000	.6240	+.0000 -.0005
-9	.5625	.7490	+.0000 -.0005
-10	.6250	.8115	+.0000 -.0005
-12	.7500	.9990	+.0000 -.0005
-14	.8750	1.1240	+.0000 -.0005
-16	1.0000	1.2485	+.0000 -.0010
-18	1.1250	1.4985	+.0000 -.0010

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AS6071>

THIRD ANGLE PROJECTION

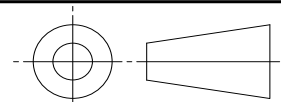

CUSTODIAN: ACBG

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

BUSHING, SLEEVE, PLAIN
CLAMP-UP

AS6071
SHEET 1 OF 2