


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	AS9141	THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9141A(ASG), AMENDMENT 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.	FEDERAL SUPPLY CLASS 5330
		THIRD ANGLE PROJECTION 	
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS			
 SAE The Engineering Society For Advancing Mobility Land Sea Air and Space® 400 Commonwealth Drive, Warrendale, PA 15096-0001		AEROSPACE STANDARD (R) GASKET - METAL O-RING, .035 TUBE X .006 WALL, CRES - UNS S32100	AS9141 SHEET 1 OF 3 REV. A

SAENORM.COM : Click to view the full PDF of as9141a

ISSUED 1998-05 REVISED 2001-07

REV.
A

AS9141

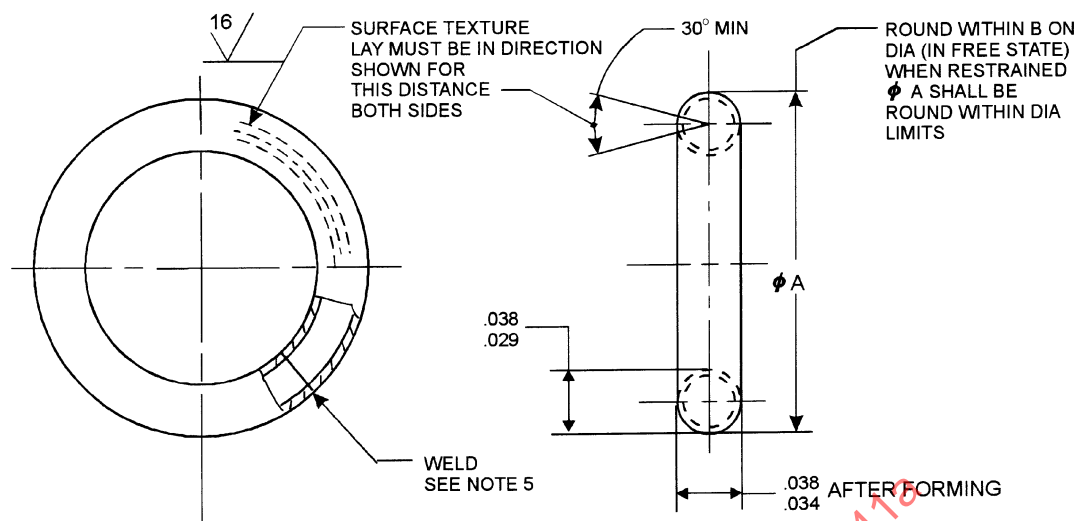


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
*MS9141-03	.250	.020	.012	MS9141-16	.812	.020	.042
MS9141-04	.281	.020	.014	*MS9141-17	.875	.020	.045
MS9141-05	.312	.020	.017	MS9141-18	.938	.020	.048
MS9141-06	.344	.020	.018	*MS9141-19	1.000	.020	.052
*MS9141-07	.375	.020	.019	MS9141-20	1.125	.020	.058
MS9141-08	.406	.020	.020	*MS9141-21	1.250	.020	.064
MS9141-09	.438	.020	.023	MS9141-22	1.375	.020	.071
MS9141-10	.469	.020	.024	*MS9141-23	1.500	.020	.077
*MS9141-11	.500	.020	.026	MS9141-24	1.625	.020	.083
MS9141-12	.562	.020	.029	*MS9141-25	1.750	.020	.089
*MS9141-13	.625	.020	.032	MS9141-26	1.875	.020	.096
MS9141-14	.688	.020	.035	*MS9141-27	2.000	.020	.103
*MS9141-15	.750	.020	.038				