


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5330	
	THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9203A(ASG), NOTICE 1, AMENDMENT 2. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.	
AS9203	SAENORM.COM : Click to view the full PDF of as9203a	
THIRD ANGLE PROJECTION 		ISSUED 1998-05 REVISED 2001-07
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS		
	AEROSPACE STANDARD (R) GASKET - METAL O-RING, .094 TUBE X .006 WALL, CRES - UNS S32100	AS9203 SHEET 1 OF 4
		REV. A

REV.
A

AS9203

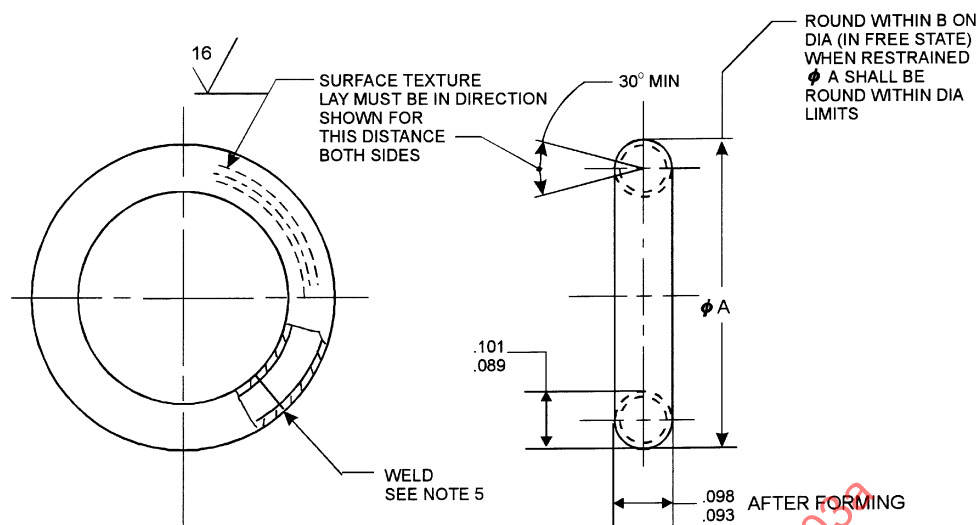


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
* MS9203-010	1.000	.030	.140	MS9203-029	1.625	.030	.227
MS9203-012	1.031	.030	.144	MS9203-030	1.688	.030	.236
MS9203-013	1.062	.030	.149	* MS9203-031	1.750	.030	.245
MS9203-014	1.094	.030	.153	MS9203-032	1.812	.030	.254
* MS9203-015	1.125	.030	.157	MS9203-033	1.875	.030	.262
MS9203-016	1.156	.030	.162	MS9203-034	1.938	.030	.271
MS9203-017	1.188	.030	.166	*MS9203-035	2.000	.030	.280
MS9203-018	1.219	.030	.171	MS9203-036	2.062	.030	.289
* MS9203-019	1.250	.030	.175	MS9203-037	2.125	.030	.297
MS9203-020	1.281	.030	.179	MS9203-038	2.188	.030	.306
MS9203-021	1.312	.030	.184	* MS9203-039	2.250	.030	.315
MS9203-022	1.344	.030	.188	MS9203-040	2.312	.030	.324
* MS9203-023	1.375	.030	.192				
MS9203-024	1.406	.030	.197				
MS9203-025	1.438	.030	.201				
MS9203-026	1.469	.030	.206				
* MS9203-027	1.500	.030	.210				
MS9203-028	1.562	.030	.219				

REV.
A

AS9203

TABLE 1 - PART NUMBERS AND DIMENSIONS (CONTINUED)

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
MS9203-041	2.375	.030	.332	MS9203-087	5.250	.090	.735
MS9203-042	2.438	.030	.341	MS9203-089	5.375	.090	.752
* MS9203-043	2.500	.030	.350	* MS9203-091	5.500	.090	.770
MS9203-044	2.562	.060	.359	MS9203-095	5.750	.090	.805
MS9203-045	2.625	.060	.367	* MS9203-099	6.000	.090	.840
MS9203-046	2.688	.060	.376	MS9203-103	6.250	.090	.875
* MS9203-047	2.750	.060	.385	MS9203-107	6.500	.090	.910
MS9203-048	2.812	.060	.394	MS9203-111	6.750	.090	.945
MS9203-049	2.875	.060	.402	* MS9203-115	7.000	.090	.980
MS9203-050	2.938	.060	.411	MS9203-119	7.250	.090	1.015
* MS9203-051	3.000	.060	.420	MS9203-123	7.500	.090	1.050
MS9203-052	3.062	.060	.429	MS9203-127	7.750	.090	1.085
MS9203-053	3.125	.060	.437	* MS9203-131	8.000	.090	1.120
MS9203-054	3.188	.060	.446	MS9203-135	8.250	.090	1.155
MS9203-055	3.250	.060	.455	MS9203-139	8.500	.090	1.190
MS9203-056	3.312	.060	.464	MS9203-143	8.750	.090	1.225
MS9203-057	3.375	.060	.472	* MS9203-147	9.000	.090	1.260
MS9203-058	3.438	.060	.481	MS9203-151	9.250	.090	1.295
* MS9203-059	3.500	.060	.490	MS9203-155	9.500	.090	1.330
MS9203-060	3.562	.060	.499	MS9203-159	9.750	.090	1.365
MS9203-061	3.625	.060	.507	* MS9203-163	10.000	.090	1.400
MS9203-062	3.688	.060	.516	MS9203-167	10.250	.125	1.435
MS9203-063	3.750	.060	.525	MS9203-171	10.500	.125	1.470
MS9203-064	3.812	.060	.534	MS9203-175	10.750	.125	1.505
MS9203-065	3.875	.060	.542	* MS9203-179	11.000	.125	1.540
MS9203-066	3.938	.060	.551	MS9203-183	11.250	.125	1.575
* MS9203-067	4.000	.060	.560	MS9203-187	11.500	.125	1.610
MS9203-069	4.125	.060	.577	MS9203-191	11.750	.125	1.645
MS9203-071	4.250	.060	.595	* MS9203-195	12.000	.125	1.680
MS9203-073	4.375	.060	.612	MS9203-203	12.500	.150	1.750
* MS9203-075	4.500	.060	.630	MS9203-211	13.000	.150	1.820
MS9203-077	4.625	.060	.647	MS9203-219	13.500	.150	1.890
MS9203-079	4.750	.060	.665	MS9203-227	14.000	.150	1.960
MS9203-081	4.875	.060	.682				
* MS9203-083	5.000	.060	.700				
MS9203-085	5.125	.090	.717				

AEROSPACE STANDARD

(R)

GASKET - METAL O-RING,
.094 TUBE X .006 WALL, CRES -
UNS S32100

AS9203
SHEET 3 OF 4

REV.
A