

Upper Coupler Kingpin—Commercial Trailers and Semitrailers

- 1. Scope**—This SAE Standard applies to upper coupler kingpins for commercial trailers and semitrailers in the unladen condition. See Figure 1. A 90 degree $\pm$ 1 degree angle extends (in all directions) from the centerline of the kingpin to the upper coupler plate surface within a 48.26 cm (19 in) radius. The upper coupler plate surface should not bow downward (convex) more than 0.635 cm (1/4 in) within a 48.26 cm (19 in) radius or more than 0.3175 cm (1/8 in) at a radius of 25.4 cm (10 in) from the kingpin. The upper coupler plate surface should not bow upward (concave) more than 0.15875 cm (1/16 in) within a 48.26 cm (19 in) radius. (See Figure 2.)

NOTE—For recommended performance, see SAE J133.

2. References

- 2.1 Applicable Publication**—The following publication forms a part of this specification to the extent specified herein. The latest issue of SAE publications shall apply.


- 2.1.1 SAE PUBLICATION**—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J133—Fifth Wheel Kingpin Performance—Commercial Trailers and Semitrailers

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TO PLACE A DOCUMENT ORDER: (724) 776-4970 FAX: (724) 776-0790
SAE WEB ADDRESS <http://www.sae.org>

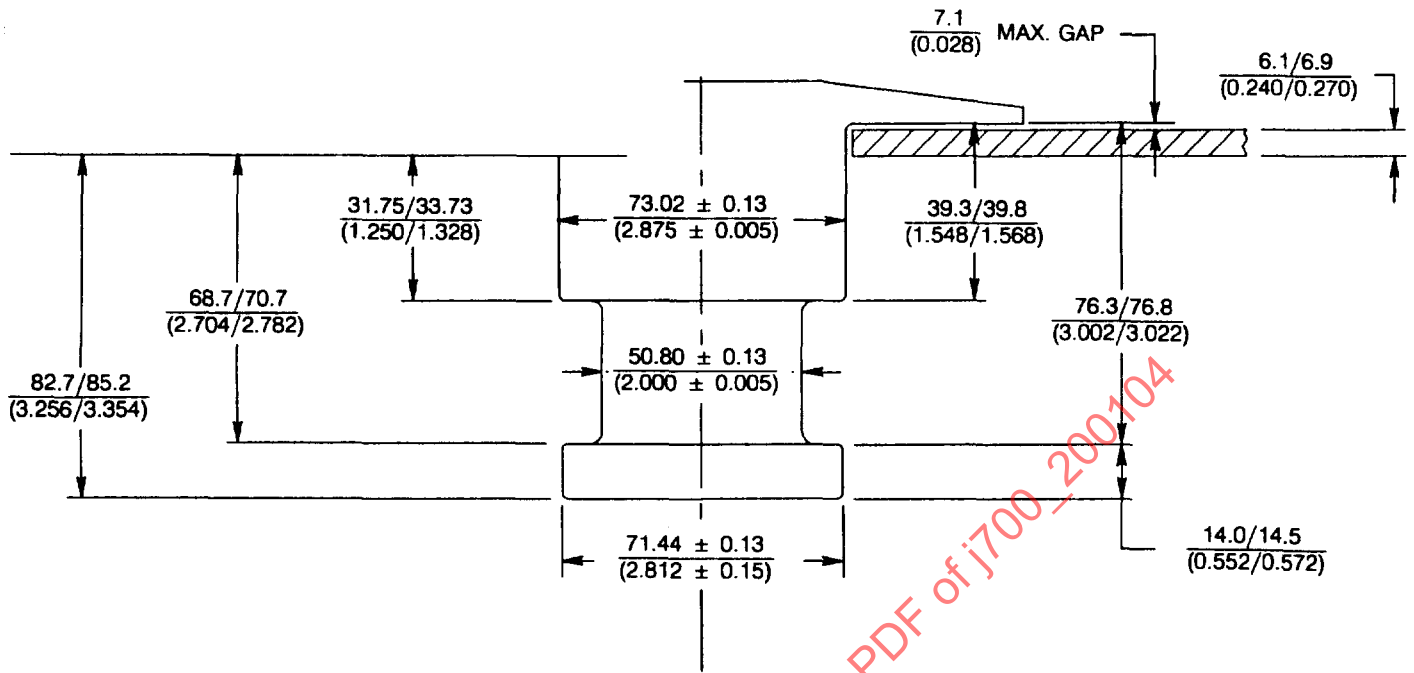

INSTALLED DIMENSIONS

TYPICAL KINGPIN DIMENSIONS
FOR 6.35 (1/4) PLATE

ALL DIMENSIONS $\frac{\text{in}}{(\text{mm})}$

FIGURE 1—UPPER COUPLER KINGPIN

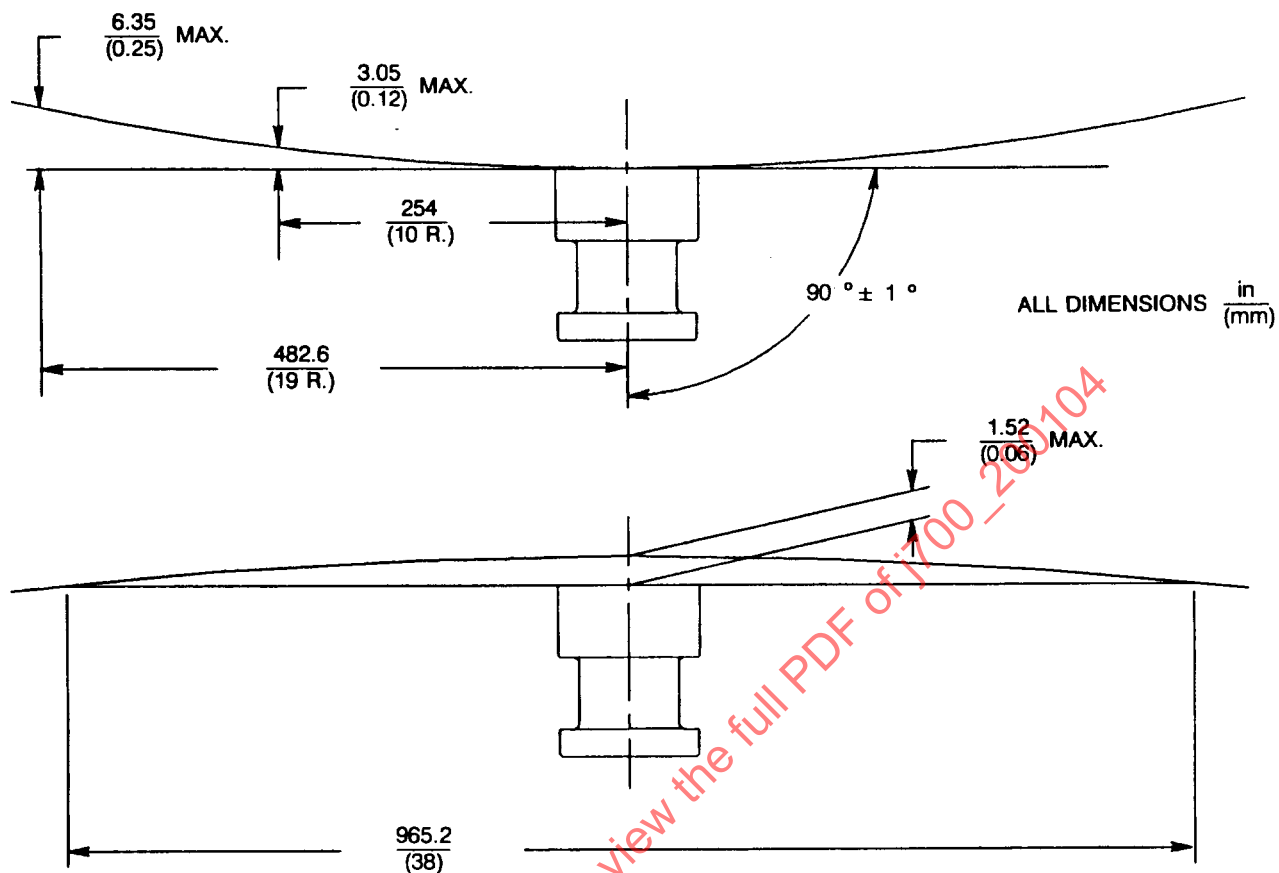


FIGURE 2—ALLOWABLE UPPER COUPLER PLATE BOWING

PREPARED BY THE SAE TRUCK AND BUS FIFTH WHEEL SUBCOMMITTEE OF THE
SAE TRUCK AND BUS CHASSIS COMMITTEE